


- Budget priced, high performance, one piece construction, metal downlight.

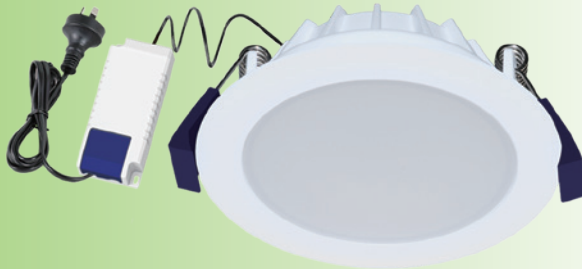

FEATURES

- Die-cast aluminium heat sink
- High efficiency SMD chips
- Constant current driver
- Opal polycarbonate diffuser
- IP54 weatherproof
- IC-F and IC-4 Rating. May be installed under ceiling insulation

DIMMING OPTIONS

- Trailing and Leading Edge
- Universal

INCLUDES

- Fixed head LED downlight
- Dimmable LED driver
- 1.2 m flex and plug

APPLICATIONS

- Residential
- Hotels and shops
- Conference rooms
- Reception areas
- Bathrooms and wet areas

WARRANTY

- Five years (subject to terms and conditions)

| CERTIFICATION | | | IP RATING | DIMMABLE | DISTRIBUTION | DIMENSIONS(mm) |
|---------------|--|--|-----------|----------|--------------|----------------|
| | | | | | | |

| Part No. | Voltage | Watt. | PF | CCT. | Ra | Lumen | Beam Angle | Lifetime L70B50 | Fitting Colour |
|----------|----------|-------|-----|-------|-----|-------|------------|-----------------|----------------|
| 172027 | 220-240V | 11W | 0.9 | 3000K | ≥80 | 800lm | 110° | 35000h | White |
| 172028 | 220-240V | 11W | 0.9 | 4000K | ≥80 | 850lm | 110° | 35000h | White |
| 172065 | 220-240V | 11W | 0.9 | 5000K | ≥80 | 850lm | 110° | 35000h | White |

| Part No. | Model No. | Driver Model No. | VEET Status | IPART Status |
|----------|------------|------------------|-------------------------|---------------------------------------|
| 172027 | YKRS3E1A-D | YKD12CC270D | Approved VEET No.: 3899 | Approved IPART No.: 24143S12-RDFGCEEN |
| 172028 | YKRS3E1A-D | YKD12CC270D | Approved VEET No.: 3899 | Approved IPART No.: 24143S12-RDFGCEEN |
| 172065 | YKRS3E1A-D | YKD12CC270D | Approved VEET No.: 3899 | Approved IPART No.: 24143S12-RDFGCEEN |

[1] Operating Frequency=50/60Hz

[2] Switch Times≥20000

[3] This fitting is IP54 only once installed

[4] For dimming compatibility please see page 85

