Data Sheet



Last modification

2022-12-07

LUC.G23-BK83-826 9329501056066



The LUC G series is a recessed dual-directional LED luminaire.

The modern design is small and discreet but bright and can therefore optimally illuminate and set the scene for walkways, driveways, gardens, and terraces. The light of the internal LEDs is emitted indirectly through a dual opening and provides glarefree orientation lighting. Can be recessed floor or wall-mounted.

With an operating voltage of $8\sim26$ volt and a water-protected rating of IP65, it is a versatile and safe lighting solution for outdoor areas. Other fixtures in the LUC series can be combined to form a complete outdoor space solution.

A 12 or 24 volt AC transformer is recommended to power up this fixture.

Overview

Family name Luc

Categories Inground Lights

Mounting Recess

Usage Outdoor Lighting,Trade Selection

Color / Material

Fixture Color Clear, Black

Fixture Material Metal,Polycarbonate

Diffuser Color Clear

Diffuser Material Polycarbonate

<u>Size</u>

Fixture Diameter (cm) 4.2
Fixture Height (cm) 8.5

Specification

 Voltage Input
 12-24V

 Wattage (max)
 6

 Wattage
 3

Globe Type LED integrated COB

Globe / Light Source qty 2
Globe / Light Source included Yes
Lumens 400

Data Sheet



Warm White **Color Temperature Color Kelvin** 3000k **Color Rendering** >84 Dimmable No Beam Angle (degree) 319 IP rating IP65 **Approvals RCM Box Contents** Instruction

Installation Required Yes (by Licensed Electrician only)


Care Instructions Do not use strong liquid cleaners, Wipe clean with a dry cloth

Replacement Warranty *3 Years

<u>Barcode</u>

GTIN 9329501056066

Image -dimensions

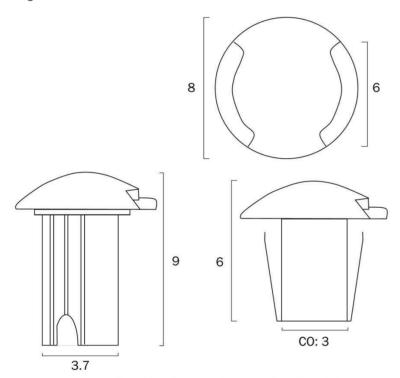

Note: Dimensions are only a guide and may vary due to manufacturing variations.

Telbix.





