

NEO-PRO-35 LED Recessed Downlight



Description


The NEO-PRO range of LED downlights are the latest upgrade to the NEO Series, with improved functions such as TRIO Tri-colour switchable technology as well as a higher IP Rating for wet areas. Designed to reduce glare as well as maintaining high performance in light output and energy consumption. LED recessed downlight with anti-glare deep set frame, frosted diffuser, and an integrated dimmable LED driver with flex & plug. Fully dimmable with suitable dimmers. Now with TRIO, the added option of changing the colour temperature output of the downlight with a dip switch at the back of the fitting.




Specification Features

| | |
|-----------------|---|
| Input Voltage: | 240V |
| Power (W): | 35 |
| IP rating (IP): | IP65 |
| Lumens (lm): | Warm White 3000K - 3200lm Neutral White 4000K - 3400lm White 5700K - 3300lm |
| LED type: | SMD |
| CCT: | 3000K - 4000K - 5700K |
| CRI: | ≥80 |
| Beam angle (°): | 90° |
| Dimmable: | Yes* |
| Lifespan (hrs): | 50,000hrs |
| Cutout (Ø): | Ø200-220mm |

*Fully dimmable with suitable dimmers.



Diagrams / Additional

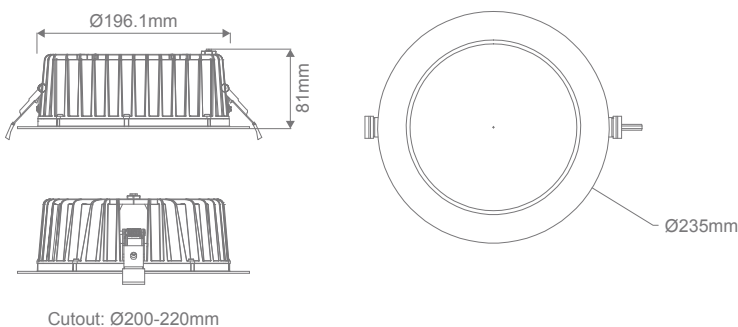

| Item No. | Variant | | CCT |
|----------------|---------|-------|------|
| | Whit | Blk | |
| NEO-PRO-35-REC | 20920 | 20919 | TRIO |
| | DALI | | |
| | 21611 | 21612 | TRIO |

NEO-PRO-25 LED Recessed Downlight



Description


The NEO-PRO range of LED downlights are the latest upgrade to the NEO Series, with improved functions such as TRIO Tri-colour switchable technology as well as a higher IP Rating for wet areas. Designed to reduce glare as well as maintaining high performance in light output and energy consumption. LED recessed downlight with anti-glare deep set frame, frosted diffuser, and an integrated dimmable LED driver with flex & plug. Fully dimmable with suitable dimmers. Now with TRIO, the added option of changing the colour temperature output of the downlight with a dip switch at the back of the fitting.




Specification Features

| | |
|-----------------|---|
| Input Voltage: | 240V |
| Power (W): | 25 |
| IP rating (IP): | IP65 |
| Lumens (lm): | Warm White 3000K - 2250lm Neutral White 4000K - 2400lm White 5700K - 2300lm |
| LED type: | SMD |
| CCT: | 3000K - 4000K - 5700K |
| CRI: | ≥80 |
| Beam angle (°): | 90° |
| Dimmable: | Yes* |
| Lifespan (hrs): | 50,000hrs |
| Cutout (Ø): | Ø150-165mm |

*Fully dimmable with suitable dimmers.



Diagrams / Additional

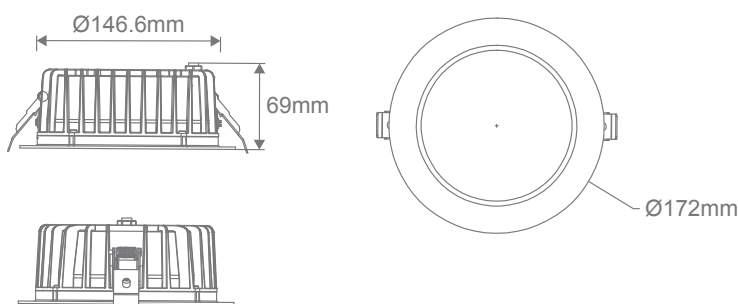

Cutout: Ø150-165mm

| Item No. | Variant | | CCT |
|----------------|---------|-------|------|
| | Whr | Blk | |
| NEO-PRO-25-REC | 20918 | 20917 | TRIO |
| | DALI | | |
| | 21609 | 21610 | TRIO |

NEO-PRO-13 LED Recessed Downlight



Description


The NEO-PRO range of LED downlights are the latest upgrade to the NEO Series, with improved functions such as TRIO Tri-colour switchable technology as well as a higher IP Rating for wet areas. Designed to reduce glare as well as maintaining high performance in light output and energy consumption. LED recessed downlight with anti-glare deep set frame, frosted diffuser, and an integrated dimmable LED driver with flex & plug. Fully dimmable with suitable dimmers. Now with TRIO, the added option of changing the colour temperature output of the downlight with a dip switch at the back of the fitting.




Specification Features

| | |
|-----------------|---|
| Input Voltage: | 240V |
| Power (W): | 13 |
| IP rating (IP): | IP65 |
| Lumens (lm): | Warm White 3000K - 850lm Neutral White 4000K - 1000lm White 5700K - 900lm |
| LED type: | SMD |
| CCT: | 3000K - 4000K - 5700K |
| CRI: | ≥80 |
| Beam angle (°): | 80° |
| Dimmable: | Yes* |
| Lifespan (hrs): | 50,000hrs |
| Cutout (Ø): | Ø90mm |

*Fully dimmable with suitable dimmers.



Diagrams / Additional

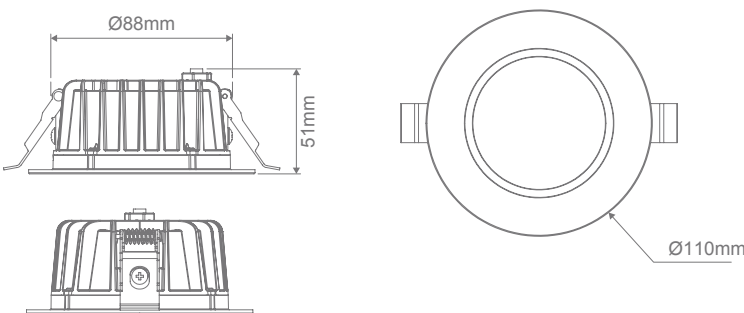

Cutout: Ø90-95mm

| Item No. | Variant | | CCT |
|----------------|---------|-------|------|
| | Wht | Blk | |
| NEO-PRO-13-REC | 20916 | 20915 | TRIO |
| | DALI | | |
| | 21607 | 21608 | TRIO |