

## NEO-PRO-13 LED Recessed Downlight



### Description


The NEO-PRO range of LED downlights are the latest upgrade to the NEO Series, with improved functions such as TRIO Tri-colour switchable technology as well as a higher IP Rating for wet areas. Designed to reduce glare as well as maintaining high performance in light output and energy consumption. LED recessed downlight with anti-glare deep set frame, frosted diffuser, and an integrated dimmable LED driver with flex & plug. Fully dimmable with suitable dimmers. Now with TRIO, the added option of changing the colour temperature output of the downlight with a dip switch at the back of the fitting.




### Specification Features

Input Voltage:	240V
Power (W):	13
IP rating (IP):	IP65
Lumens (lm):	Warm White 3000K - 850lm Neutral White 4000K - 1000lm White 5700K - 900lm
LED type:	SMD
CCT:	3000K - 4000K - 5700K
CRI:	≥80
Beam angle (°):	80°
Dimmable:	Yes*
Lifespan (hrs):	50,000hrs
Cutout (Ø):	Ø90mm

\*Fully dimmable with suitable dimmers.



### Diagrams / Additional

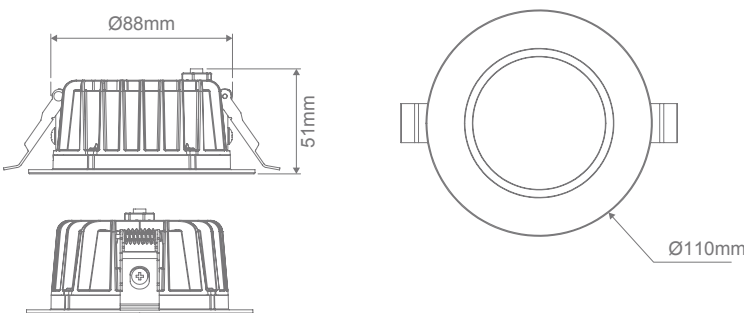

Item No.	Variant		CCT
	Whi	Blk	
NEO-PRO-13-REC	20916	20915	TRIO

## NEO-PRO-25 LED Recessed Downlight



### Description


The NEO-PRO range of LED downlights are the latest upgrade to the NEO Series, with improved functions such as TRIO Tri-colour switchable technology as well as a higher IP Rating for wet areas. Designed to reduce glare as well as maintaining high performance in light output and energy consumption. LED recessed downlight with anti-glare deep set frame, frosted diffuser, and an integrated dimmable LED driver with flex & plug. Fully dimmable with suitable dimmers. Now with TRIO, the added option of changing the colour temperature output of the downlight with a dip switch at the back of the fitting.




### Specification Features

Input Voltage:	240V
Power (W):	25
IP rating (IP):	IP65
Lumens (lm):	Warm White 3000K - 2250lm Neutral White 4000K - 2400lm White 5700K - 2300lm
LED type:	SMD
CCT:	3000K - 4000K - 5700K
CRI:	≥80
Beam angle (°):	90°
Dimmable:	Yes*
Lifespan (hrs):	50,000hrs
Cutout (Ø):	Ø150-165mm

\*Fully dimmable with suitable dimmers.



### Diagrams / Additional

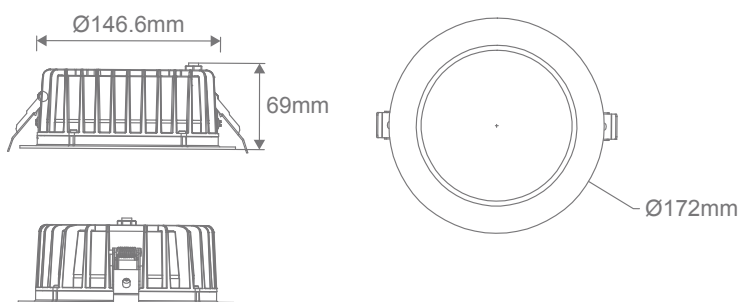

Cutout: Ø150-165mm

Item No.	Variant		CCT
	Wht	Blk	
<b>NEO-PRO-25-REC</b>	20918	20917	TRIO

## NEO-PRO-35 LED Recessed Downlight



### Description


The NEO-PRO range of LED downlights are the latest upgrade to the NEO Series, with improved functions such as TRIO Tri-colour switchable technology as well as a higher IP Rating for wet areas. Designed to reduce glare as well as maintaining high performance in light output and energy consumption. LED recessed downlight with anti-glare deep set frame, frosted diffuser, and an integrated dimmable LED driver with flex & plug. Fully dimmable with suitable dimmers. Now with TRIO, the added option of changing the colour temperature output of the downlight with a dip switch at the back of the fitting.




### Specification Features

Input Voltage:	240V
Power (W):	35
IP rating (IP):	IP65
Lumens (lm):	Warm White 3000K - 3200lm Neutral White 4000K - 3400lm White 5700K - 3300lm
LED type:	SMD
CCT:	3000K - 4000K - 5700K
CRI:	≥80
Beam angle (°):	90°
Dimmable:	Yes*
Lifespan (hrs):	50,000hrs
Cutout (Ø):	Ø200-220mm

\*Fully dimmable with suitable dimmers.



### Diagrams / Additional

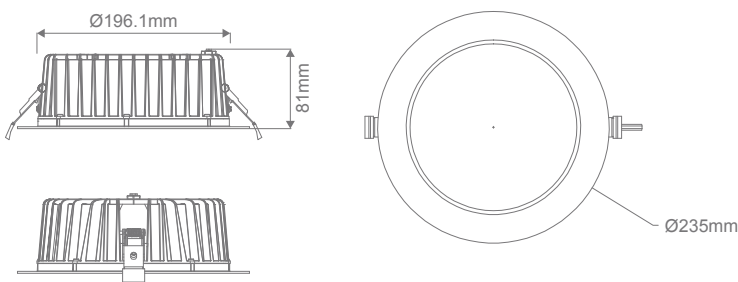

Item No.	Variant		CCT
	Whi	Blk	
NEO-PRO-35-REC	20920	20919	TRIO