SMART LIGHT | CEILING LIGHTING | WHITE



2015136101



Voltage (V): 230 Volt IP degree if the fixture includes two types of IP degree: IP20 Class (Class I, Class II, Class III): Class 2 (Double isolated) Lampholder type (eg, E27/E14, etc): LED Module

Primary material: Plastic Secondary material: Metal

Color: White

Width (cm): 42.4 Lenght (cm): 42.4 Projection (cm): 2.3

EAN: 5704924002984 TUN: 2116035 Item Number: 2015136101 Pcs Per Master Carton: 3 Sales Box Height (cm): 43

Sales Box Width(cm): 42.5

Sales Box Depth (cm): 2.8 Sales Box Volume m³: 0.0051 Net weight of the luminiare (kg): 1.1

Useful Lumen (lm): 2300 Color Temperature (K): 2700-6500

Ra-value : 80 Lifetime (h): 25000

Spread Angle (°) (beam angle of

luminaire): 120

Candela (cd) (for directional

lamp only): 0 Energy Class: E

Oja is an ultra slim ceiling panel light in a modern and simple design that is very easy to install and can be connected to Nordlux Smart Light using Bluetooth. With your chosen device you will have the ability to change the light from a warm white to a cool white.


Oja is integrated with the newest Bluetooth Mesh technology which allows you to control the light using your phone and that works both indoor and outdoor with a stable communication between your devices.

SMART LIGHT | CEILING LIGHTING | WHITE



2015146101



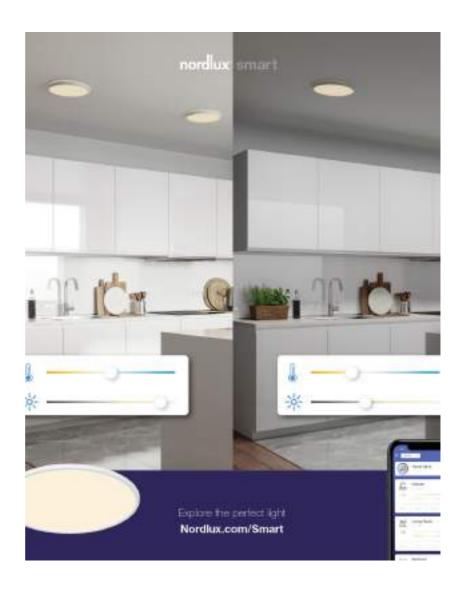

Voltage (V): 230 Volt IP degree if the fixture includes two types of IP degree: IP20 Class (Class I, Class II). Class III): Class 1 (Earth contact) Lampholder type (eg, E27/E14, etc): LED Module

Primary material: Plastic Secondary material: Metal Color: White Height (cm): 2.3 Width (cm): 60 Projection (cm): 2.3

EAN: 5704924002991 TUN: 2116036 Item Number: 2015146101 Pcs Per Master Carton: 3 Sales Box Height (cm): 61 Sales Box Width(cm): 60.5 Sales Box Depth (cm): 3.6 Sales Box Volume m³: 0.0133 Net weight of the luminiare (kg):

Useful Lumen (lm): 3500 Color Temperature (K): 2700-

6500 Ra-value : 80 Lifetime (h): 25000

Spread Angle (°) (beam angle of

luminaire): 120

Candela (cd) (for directional

lamp only): 0 Energy Class: E

Oja is an ultra slim ceiling panel light in a modern and simple design that is very easy to install and can be connected to Nordlux Smart Light using Bluetooth. With your chosen device you will have the ability to change the light from a warm white to a cool white.

Oja is a huge ceiling panel of 60 cm in size that is integrated with the newest Bluetooth Mesh technology which allows you to control the light using your phone and that works both indoor and outdoor with a stable communication between your devices.

SMART LIGHT | CEILING LIGHTING

2015036101







Voltage (V): 230 Volt IP degree if the fixture includes two types of IP degree: IP20 Class (Class I, Class II, Class III): Class 2 (Double isolated) Lampholder type (eg, E27/E14, etc): LED Module

Primary material: Plastic

Width (cm): 29.4 Lenght (cm): 29.4 Projection (cm): 2.3

EAN: 5704924002977

TUN: 2116034 Item Number: 2015036101 Pcs Per Master Carton: 3 Sales Box Height (cm): 30 Sales Box Width(cm): 29.5 Sales Box Depth (cm): 2.8 Sales Box Volume m³: 0.0025 Net weight of the luminiare (kg): 0.6

Useful Lumen (lm): 1600 Color Temperature (K): 2700-

6500 Ra-value : 80 Lifetime (h): 25000

Spread Angle (°) (beam angle of

luminaire): 120

Candela (cd) (for directional

lamp only): 0 Energy Class: F

Oja is an ultra slim ceiling panel light in a modern and simple design that is very easy to install and can be connected to Nordlux Smart Light using Bluetooth. With your chosen device you will have the ability to change the light from a warm white to a cool white.

Oja is integrated with the newest Bluetooth Mesh technology which allows you to control the light using your phone and that works both indoor and outdoor with a stable communication between your devices.