



Olson 200

UNIVERSAL SIDE DUCTED EXHAUST FAN

- Improved motor design for higher airflow
- Suitable for most household applications
- Longer lasting ball bearing motor
- Easy to install and clean
- Built in backdraft stopper
- Lower noise levels

Olson 200




UNIVERSAL SIDE DUCTED EXHAUST FAN

Round grille with side ducted exhaust fan. Draft stopper and easy install plug & lead included.



DIMENSIONS

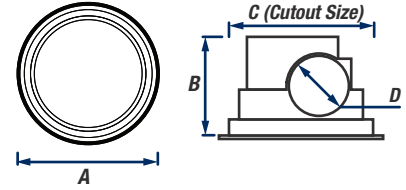

A	B	C	D
270mm	173mm	240mm	Ø125mm

EXHAUST

Air Delivery: 270m³H*
Motor Power: 45 watts
Noise Level: 43dB(A)
Ball Bearing: Yes

Duct Outlet: 125mm
Draft Stopper: Yes

INSTALLATION

Cut Out Size: ø240mm
Grille Size: ø270mm
Recommended
Min Install Depth: 200mm
Power Input: 220-240V~50Hz
IP Rating: IP24

Installation: Plug and Lead

SHIPPING

Packaging Size: 335 x 318 x 226mm
Gross Weight: 2.5kg

Carton Size: 675 x 365 x 485mm
Carton Weight: 11.5kg
Carton Qty: 4 Pieces

Pallet Qty: 64 pieces



INCLUDES

1 x Exhaust Unit
 1 x Cutout Template

AVAILABLE EXTRAS

VAD125 3m Alum Ducting
VTROTIMER 1-25min Run-on-Timer
VTMSENSOR 1-20min Motion Sensor
V125FG 125mm external grille

* Ventair is leading the industry by ensuring all airflow data is gathered in accordance with International industry standard ISO 5801.

Model	Outer Carton	EAN13 Barcode
White Round OLSWURD	19339310011368	9 339310 011361

ventair_{tm}
 THE AIR MOVEMENT SPECIALISTS

+61 3 9775 0556
 +61 3 9775 0775
 sales@ventair.com.au

4 Capital Place, Carrum Downs Vic 3201
 www.ventair.com.au



Olson 250

UNIVERSAL SIDE DUCTED EXHAUST FAN

- Improved motor design for higher airflow
- Suitable for most household applications
- Longer lasting ball bearing motor
- Easy to install and clean
- Built in backdraft stopper
- Lower noise levels

Olson 250




UNIVERSAL SIDE DUCTED EXHAUST FAN

Round white fascia with side ducted exhaust fan. Draft stopper and easy install plug & lead included.



DIMENSIONS

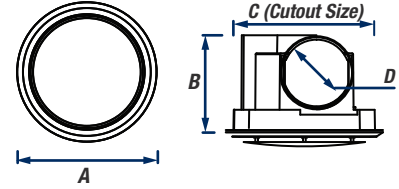

A	B	C	D
323mm	195mm	295mm	Ø150mm

EXHAUST

Air Delivery: 310m³H*
Motor Power: 40 watts
Noise Level: 43dB(A)
Ball Bearing: Yes

Duct Outlet: 150mm
Draft Stopper: Yes

INSTALLATION

Cut Out Size: ø295mm
Grille Size: ø323mm
Recommended
Min Install Depth: 220mm
Power Input: 220-240V~50Hz
IP Rating: IP20

Installation: Plug and Lead

SHIPPING

Packaging Size: 340 x 230 x 340mm
Gross Weight: 3.25kg

Carton Size: 480 x 360 x 710mm
Carton Weight: 13kg
Carton Qty: 4 Pieces

Pallet Qty: 48 pieces

INCLUDES

1 x Exhaust Unit
1 x Cutout Template
1 x Instruction Manual
1 x Warranty Card

AVAILABLE EXTRAS

VAD150-3 3m Alum Ducting
VTROTIMER 1-25min Run-on-Timer
VTMSSENSOR 1-20min Motion Sensor
VAD150 6m Alum Ducting

* Ventair is leading the industry by ensuring all airflow data is gathered in accordance with International industry standard ISO 5801.

Model	Outer Carton	EAN13 Barcode
White Round OLS250RD	19339310011788	

ventairtm
THE AIR MOVEMENT SPECIALISTS

+61 3 9775 0556
+61 3 9775 0775
sales@ventair.com.au

4 Capital Place, Carrum Downs Vic 3201
www.ventair.com.au