


Proline Custom

- Single pendant light
- Available in Black, Silver or White
- 1800mm, 2400mm or 3000mm lengths
- Supplied with dimmable LED Driver (remote installed)
- 46w per metre
- 120° beam angle
- Cable length: 2000mm Adjustable
- IP Rating: IP20

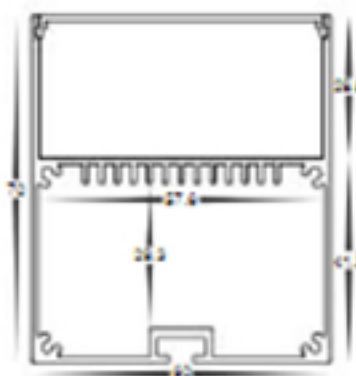

Custom Made Lengths (From 4-5 days production time + delivery)

PART NUMBER	LENGTH	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
HV6001C-BLK-1.8	1800mm	5500K	8200lm	240v	Built-in 82w LED
HV6001N-BLK-1.8	1800mm	4000K	7860lm	240v	Built-in 82w LED
HV6001W-BLK-1.8	1800mm	3000K	7450lm	240v	Built-in 82w LED
HV6001C-BLK-2.4	2400mm	5500K	11000lm	240v	Built-in 110w LED
HV6001N-BLK-2.4	2400mm	4000K	10400lm	240v	Built-in 110w LED
HV6001W-BLK-2.4	2400mm	3000K	9900lm	240v	Built-in 110w LED
HV6001C-BLK-3.0	3000mm	5500K	13800lm	240v	Built-in 138w LED
HV6001N-BLK-3.0	3000mm	4000K	13100lm	240v	Built-in 138w LED
HV6001W-BLK-3.0	3000mm	3000K	12400lm	240v	Built-in 138w LED
PART NUMBER	LENGTH	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
HV6001C-SLV-1.8	1800mm	5500K	8200lm	240v	Built-in 82w LED
HV6001N-SLV-1.8	1800mm	4000K	7860lm	240v	Built-in 82w LED
HV6001W-SLV-1.8	1800mm	3000K	7450lm	240v	Built-in 82w LED
HV6001C-SLV-2.4	2400mm	5500K	11000lm	240v	Built-in 110w LED
HV6001N-SLV-2.4	2400mm	4000K	10400lm	240v	Built-in 110w LED
HV6001W-SLV-2.4	2400mm	3000K	9900lm	240v	Built-in 110w LED
HV6001C-SLV-3.0	3000mm	5500K	13800lm	240v	Built-in 138w LED
HV6001N-SLV-3.0	3000mm	4000K	13100lm	240v	Built-in 138w LED
HV6001W-SLV-3.0	3000mm	3000K	12400lm	240v	Built-in 138w LED
PART NUMBER	LENGTH	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
HV6001C-WHT-1.8	1800mm	5500K	8200lm	240v	Built-in 82w LED
HV6001N-WHT-1.8	1800mm	4000K	7860lm	240v	Built-in 82w LED
HV6001W-WHT-1.8	1800mm	3000K	7450lm	240v	Built-in 82w LED
HV6001C-WHT-2.4	2400mm	5500K	11000lm	240v	Built-in 110w LED
HV6001N-WHT-2.4	2400mm	4000K	10400lm	240v	Built-in 110w LED
HV6001W-WHT-2.4	2400mm	3000K	9900lm	240v	Built-in 110w LED
HV6001C-WHT-3.0	3000mm	5500K	13800lm	240v	Built-in 138w LED
HV6001N-WHT-3.0	3000mm	4000K	13100lm	240v	Built-in 138w LED
HV6001W-WHT-3.0	3000mm	3000K	12400lm	240v	Built-in 138w LED


All low voltage products that specify an input of 12v or 24v DC, must be used with a suitable LED driver, refer to pages 275 - 282
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 362

PRODUCT SPECIFICATIONS


- Name:** Proline Linear
- Material:** Aluminium
- Colour:** Black, White or Silver
- IP Rating:** IP20
- Cable Length:** 2000mm (adjustable)
- Lamp Base:** Built in LED
- CRI:** ≥80
- Wiring:** Parallel
- Dimmable:** Yes (Triac)
- Warranty:** 2 Years Replacement**



DIMENSIONS

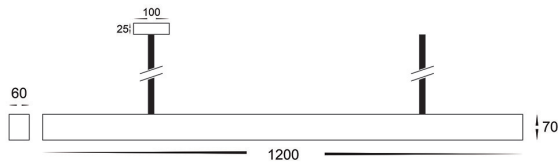

COLOUR TEMPERATURE



IP RATING



APPROVALS



Product Ordering

IMAGE	PART NUMBER	COLOURTEMP	LUMENS	INPUT	BEAM ANGLE	INCLUDED LED
	HV6001T-BLK	3000k 4000k 5500k	3800lm 3900lm 4000lm	240v AC	120°	TRI Colour 40w Built in LED
	HV6001T-SLV	3000k 4000k 5500k	3800lm 3900lm 4000lm			
	HV6001T-WHT	3000k 4000k 5500k	3800lm 3900lm 4000lm			

* Lumen output measured at source

** See Warranty Terms and Conditions for more information

For more information contact Havit Lighting

ADDRESS:
143 Beauchamp Road
Matraville NSW 2036
Australia

Tel: 02 9381 8300
Fax: 02 9666 8881
Email: sales@havit.com.au
web: www.havit.com.au