

# RAZORDM SERIES


## Interior Surface Mounted LED Dimmable Tri-Colour Battens

### Product Features:

- Input voltage: 220-240V AC 50/60Hz
- Constant current inbuilt driver included
- Inrush current: <20A
- Housing: powder coated aluminium
- Diffuser: PC
- Heat sink: aluminium
- CCT changeable: 3000K/ 4000K/ 5000K
- LED chips: SMD2835
- Power factor: ≥0.9
- Ambient temp: -20 to 40°C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with 3 wire motion or Microwave sensors




3 CCT in one fitting  
CCT switch on the fitting

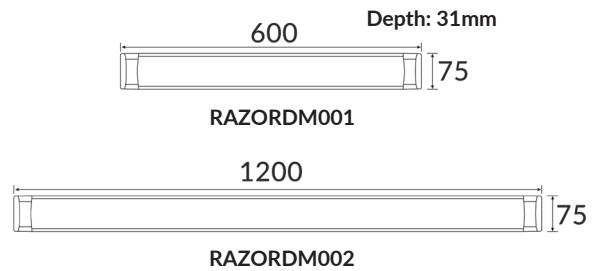

### Tested & Recommended Dimmers:

Brand	Part No.	PCS per Dimmer
CLA - Trailing Edge	VELA, LYNX	RAZORDM001: 2-10PCS RAZORDM002: 2-5PCS
Diginet - Ledsmart	MMDM/BP, MMDM/RT	
Clipsal - Universal	32ELEDM, 32E450UDM	

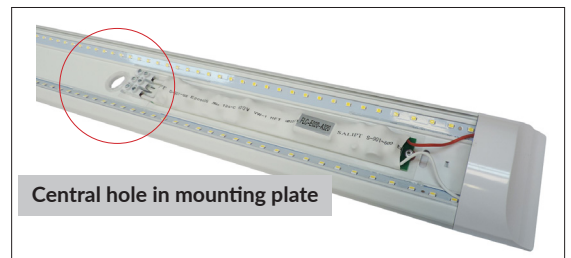

Part No.	Description	Kelvin	Lumens	Watt	CRI	Dimensions	Weight	Box	Carton QTY
RAZORDM001	BATTEN LED S/M WH Central Hole 18W 160D 600mm 2FT Dimm	3000/ 4000/ 5000K	1500/ 1700/ 1500lm	18W	>80	600x75x31mm	0.40	61x8x3cm	1/10
RAZORDM002	BATTEN LED S/M WH Central Hole 36W 160D 1200mm 4FT Dimm	3000/ 4000/ 5000K	3000/ 3400/ 3000lm	36W	82	1200x75x31mm	0.80	120x8x3cm	1/10

UPDATED ON 18.12.2018