




ROME2

LED Interior Surface Mounted Wall Light

- Input voltage: 220-240V AC 50/60Hz
- Inbuilt constant current LED driver included
- Driver output voltage: 2.8-12V
- Driver input current: 0.1A
- Driver output current: 0.35A
- Power factor: 0.5
- Material: iron, aluminium electro plated s/chrome & acrylic diffuser
- Ambient Temp: -20 to 50°C (The life of the lamp will gradually reduce if used outside these temperature parameters)
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with PIR & Microwave sensors

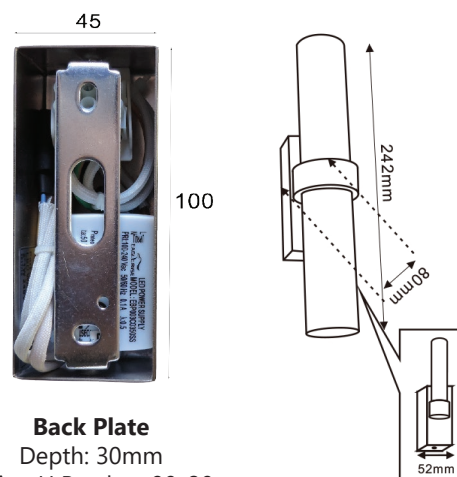

Back Plate
Depth: 30mm
Mounting U Bracket: 90x20mm
Central 25mm cable entry

30,000hr Lifetime	120° Beam Angle	IP20 Rated	2YEAR Replacement Warranty
----------------------	--------------------	----------------------	---

PART NO.	KELVIN (K)	LUMENS (LM)	Lumious Efficiency (lm/W)	WATT (W)	LEDs	CRI	WEIGHT (Kg)	BOX (cm)	CARTON QTY
ROME2	3000	230	66	2x1	2pcs 3535	>=80	0.69	26x10.5x5.5	12

Brochure updated on 11.05.2018