

EM - 109 EVAC SERIES SURFACE MOUNT



SPECIFICATIONS


- D40 Classification
- Non-maintained
- Overcharge Protection
- 3.2v LiFePO4 Battery
- Constant current mode
- SELV output
- Overcharge protection
- Polarity reversal protection for battery
- Charge time 24 Hours
- Complies with AS2293.3-2005 +
- AMD 1&2 Annex C
- EMC compliant
- Metal housing
- 180mmx180mmx50mm
- Surface mount
- Rating IP20
- Complies With: AS2293.3-2005 + Amd 1 & 2 Annex C
- 3year warranty*

PRODUCT INFORMATION

Order Code	Power	Lumens	CCT	Body Colour	CRI (Ra)	IP Rating	Beam Angle	Dimmable	Emergency	Sensor	Size	SKU Number	Carton Qty	Weight
SCI-2094-W	1.6w	200	5000k	White	82	20	140°	N/A	YES	N/A	180 x 52mm	9376047818597	20	11kg
SCI-2094-B	1.6w	200	5000k	Black	82	20	140°	N/A	YES	N/A	180 x 52mm	9376047818597	20	11kg

Voltage	Frequency HZ	IK Rating	Diffuser	Body Material	Mounting Type	Wiring Type
240v	50Hz	N/A	N/A	PC	Ceiling / Wall	Flex & Plug

DIMENSIONS

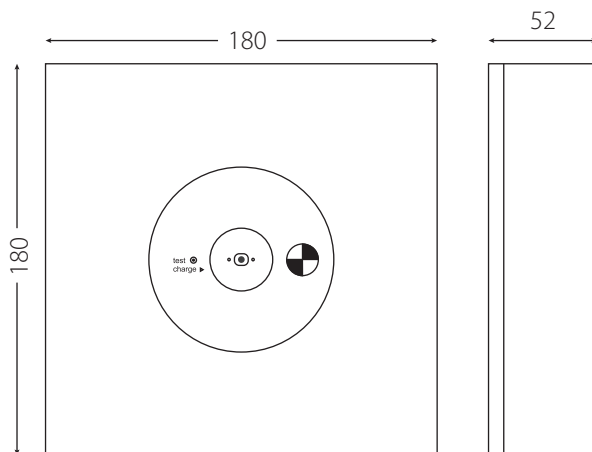

OPTIONS

Black and white boxes available



P: 1300 23 23 53
F: 1300 23 23 63
sales@scillumination.com.au
www.scillumination.com.au