


# COASTAL BUNKER SERIES

13W

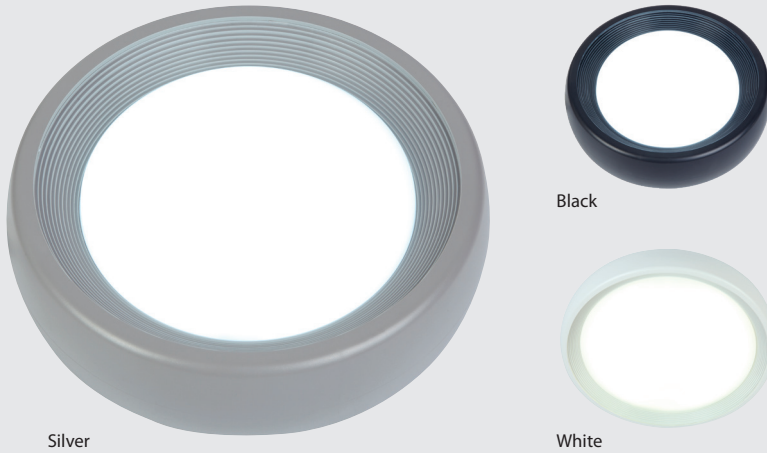

Silver

Black


White

## PRODUCT INFORMATION

Order Code	Power	Lumens	CCT	Body Colour	CRI (Ra)	IP Rating	Beam Angle	Dimmable	Emergency	Sensor	Size	SKU Number	Carton Qty	Weight
SCI-2610	13w	980	3000k	White	82	65	120°	N/A	N/A	N/A	245 x 75mm	9376047817088	12	11.5kg
SCI-2611	13w	1040	6000k	White	82	65	120°	N/A	N/A	N/A	245 x 75mm	9376047817095	12	11.5kg
SCI-2612	13w	980	3000k	Silver	82	65	120°	N/A	N/A	N/A	245 x 75mm	9376047817101	12	11.5kg
SCI-2613	13w	1040	6000k	Silver	82	65	120°	N/A	N/A	N/A	245 x 75mm	9376047817118	12	11.5kg
SCI-2614	13w	980	3000k	Black	82	65	120°	N/A	N/A	N/A	245 x 75mm	9376047817125	12	11.5kg
SCI-2615	13w	1040	6000k	Black	82	65	120°	N/A	N/A	N/A	245 x 75mm	9376047817132	12	11.5kg

Voltage	Frequency HZ	IK Rating	Diffuser	Body Material	Mounting Type	Wiring Type
240v	50Hz	10	Opal	UV Treated Polycarbonate	Ceiling / Wall	Hardwire

## DIMENSIONS

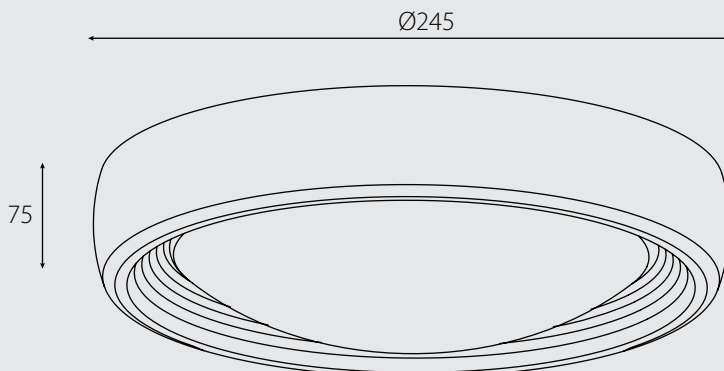

## FEATURES:

UV Treated PC

Rust Resistant

Black, Silver, White

Colour Temperature -  
3000k- 6000k

Double Insulated

IK10- Impact Resistant


IP65

Easy Installation

LED energy Efficient

Non-Dimmable

5 Year Warranty




P: 1300 23 23 53 • F: 1300 23 23 63  
sales@scillumination.com.au  
[www.scillumination.com.au](http://www.scillumination.com.au)

# COASTAL BUNKER SERIES

8W



Silver



Black




White

## PRODUCT INFORMATION

Order Code	Power	Lumens	CCT	Body Colour	CRI (Ra)	IP Rating	Beam Angle	Dimmable	Emergency	Sensor	Size	SKU Number	Carton Qty	Weight
SCI-2600	8w	560	3000k	White	82	65	120°	N/A	N/A	N/A	190 x 75mm	9376047817026	12	7kg
SCI-2601	8w	620	6000k	White	82	65	120°	N/A	N/A	N/A	190 x 75mm	9376047817033	12	7kg
SCI-2602	8w	560	3000k	Silver	82	65	120°	N/A	N/A	N/A	190 x 75mm	9376047817040	12	7kg
SCI-2603	8w	620	6000k	Silver	82	65	120°	N/A	N/A	N/A	190 x 75mm	9376047817057	12	7kg
SCI-2604	8w	560	3000k	Black	82	65	120°	N/A	N/A	N/A	190 x 75mm	9376047817064	12	7kg
SCI-2605	8w	620	6000k	Black	82	65	120°	N/A	N/A	N/A	190 x 75mm	9376047817071	12	7kg

Voltage	Frequency HZ	IK Rating	Diffuser	Body Material	Mounting Type	Wiring Type
240v	50Hz	10	Opal	UV Treated Polycarbonate	Ceiling / Wall	Hardwire

## DIMENSIONS

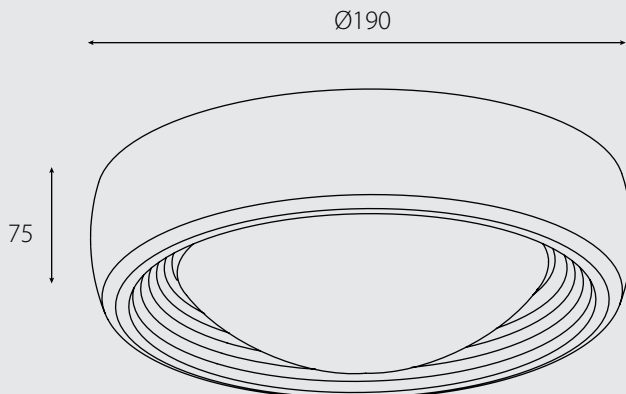

## FEATURES:

UV Treated PC

Rust Resistant

Black, Silver, White

Colour Temperature -  
3000k- 6000k

Double Insulated

IK10- Impact Resistant


IP65

Easy Installation

LED energy Efficient

Non-Dimmable

5 Year Warranty



P: 1300 23 23 53 • F: 1300 23 23 63  
sales@scillumination.com.au  
[www.scillumination.com.au](http://www.scillumination.com.au)