

Last modification 2022-11-29

SKY OY60.3C3D-WH
9329501057162



The SKY 60 oyster collection offers a sleek, modern look for your living space. This LED energy-efficient ceiling light fixture comes in an ultra-thin flush mount frame, making it a perfect fit for low ceilings. The color temperature of the light can be pre-set by a hidden select switch and 3 stage dimming is included by simple wall switch cycles. The white acrylic diffuser softens and scatters the throw of light, and a white frame adds a clean, contemporary touch. Perfect for all areas of the home.

Overview

Family name	Sky
Categories	Oysters
Mounting	Surface
This item includes	Diffuser
Usage	Indoor Lighting,Trade Selection
ERAC Product Registration	SAA203056

Color / Material

Fixture Color	White,Opal
Fixture Material	Polycarbonate
Canopy Color	White
Diffuser Color	Opal
Diffuser Material	Polycarbonate

Size

Fixture Diameter (cm)	60.0
Fixture Projection (cm)	2.5
Diffuser Diameter (cm)	60.0

Specification

Voltage Input	240V
Wattage (max)	45
Globe Type	LED integrated SMD
Globe / Light Source qty	1
Globe / Light Source included	Yes
Lumens	5400


All representations within this document are subject to copyright.ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000.
NOTE : All images , descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation.


Color Temperature	Warm White; Natural White; Cool White
Color Kelvin	3 CCT (3000k - 4000k - 6500k)
Color Rendering	>85
Dimmable	Yes - 3 Step by switch (100% - 50% -20%)
Power Factor	>0.90
Surge Protection	Yes (1.5 Kva)
Lumens maintenance	25000 Hrs
Beam Angle (degree)	120
Electrical Protection	CLASS II - DOUBLE INSULATED, EARTH NOT REQUIRED
IP rating	IP20
Lead and Plug	No
Approvals	RCM
Assembly Required	No
Box Contents	Basic mounting screws,Instruction,Quick Connector Terminal
Installation Required	Yes (by Licensed Electrician only)
Care Instructions	Do not use strong liquid cleaners,Wipe clean with a dry cloth
Replacement Warranty	*3 Years

Barcode

GTIN 9329501057162

Image -dimensions

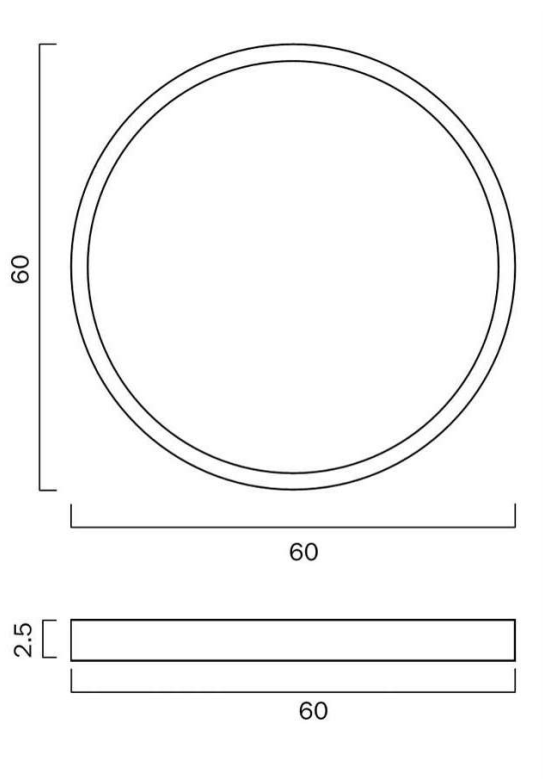

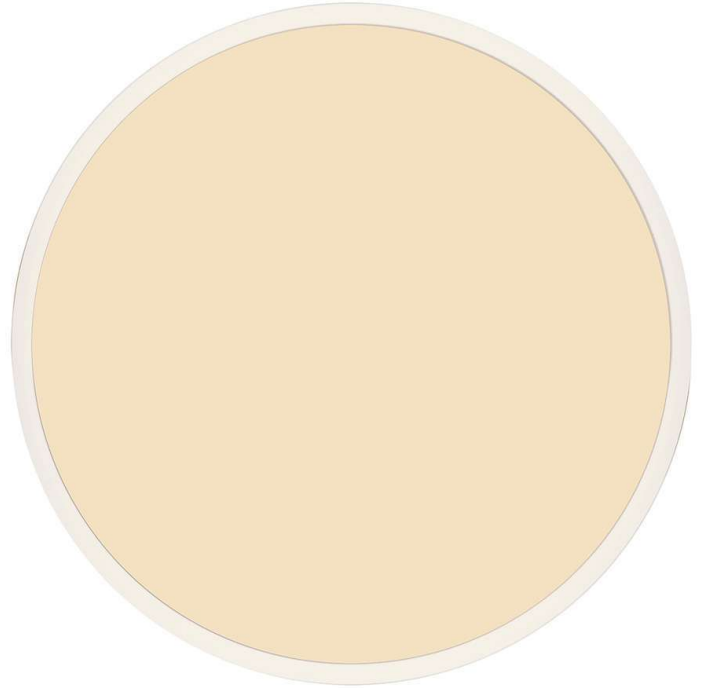

Last modification

2022-11-29

SKY OY23.3C3D-WH
9329501057100



The SKY 23 oyster collection offers a sleek, modern look for your living space. This LED energy-efficient ceiling light fixture comes in an ultra-thin flush mount frame, making it a perfect fit for low ceilings. The color temperature of the light can be pre-set by a hidden select switch and 3 stage dimming is included by simple wall switch cycles. The white acrylic diffuser softens and scatters the throw of light, and a white frame adds a clean, contemporary touch. Perfect for all areas of the home.

Overview

Family name	Sky
Categories	Oysters
Mounting	Surface
This item includes	Diffuser
Usage	Indoor Lighting,Trade Selection
ERAC Product Registration	SAA203056

Color / Material

Fixture Color	White,Opal
Fixture Material	Polycarbonate
Canopy Color	White
Diffuser Color	Opal
Diffuser Material	Polycarbonate

Size

Fixture Diameter (cm)	23.0
Fixture Projection (cm)	2.5
Diffuser Diameter (cm)	23.0

Specification

Voltage Input	240V
Wattage (max)	18
Globe Type	LED integrated SMD
Globe / Light Source qty	1
Globe / Light Source included	Yes
Lumens	2100


All representations within this document are subject to copyright.ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000.
NOTE : All images , descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation.


Color Temperature	Warm White; Natural White; Cool White
Color Kelvin	3 CCT (3000k - 4000k - 6500k)
Color Rendering	>85
Dimmable	Yes - 3 Step by switch (100% - 50% -20%)
Power Factor	>0.90
Surge Protection	Yes (1.5 Kva)
Lumens maintenance	25000 Hrs
Beam Angle (degree)	120
Electrical Protection	CLASS II - DOUBLE INSULATED, EARTH NOT REQUIRED
IP rating	IP20
Lead and Plug	No
Approvals	RCM
Assembly Required	No
Box Contents	Basic mounting screws,Instruction,Quick Connector Terminal
Installation Required	Yes (by Licensed Electrician only)
Care Instructions	Do not use strong liquid cleaners,Wipe clean with a dry cloth
Replacement Warranty	*3 Years

Barcode

GTIN 9329501057100

Image -dimensions

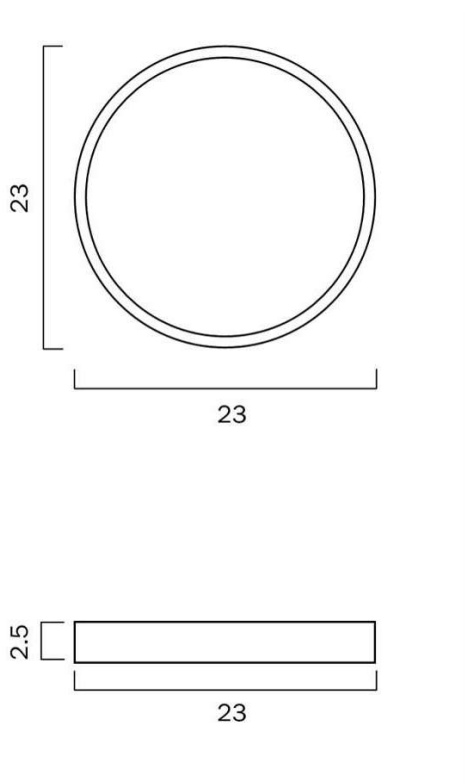



Last modification 2022-11-29

SKY OY30.3C3D-WH
9329501057124



The SKY 30 oyster collection offers a sleek, modern look for your living space. This LED energy-efficient ceiling light fixture comes in an ultra-thin flush mount frame, making it a perfect fit for low ceilings. The color temperature of the light can be pre-set by a hidden select switch and 3 stage dimming is included by simple wall switch cycles. The white acrylic diffuser softens and scatters the throw of light, and a white frame adds a clean, contemporary touch. Perfect for all areas of the home.

Overview

Family name	Sky
Categories	Oysters
Mounting	Surface
This item includes	Diffuser
Usage	Indoor Lighting,Trade Selection
ERAC Product Registration	SAA203056

Color / Material

Fixture Color	White,Opal
Fixture Material	Polycarbonate
Canopy Color	White
Diffuser Color	Opal
Diffuser Material	Polycarbonate

Size

Fixture Diameter (cm)	30.0
Fixture Projection (cm)	2.5
Diffuser Diameter (cm)	30.0

Specification

Voltage Input	240V
Wattage (max)	24
Globe Type	LED integrated SMD
Globe / Light Source qty	1
Globe / Light Source included	Yes
Lumens	2800


All representations within this document are subject to copyright.ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000.
NOTE : All images , descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation.


Color Temperature	Warm White; Natural White; Cool White
Color Kelvin	3 CCT (3000k - 4000k - 6500k)
Color Rendering	>85
Dimmable	Yes - 3 Step by switch (100% - 50% -20%)
Power Factor	>0.90
Surge Protection	Yes (1.5 Kva)
Lumens maintenance	25000 Hrs
Beam Angle (degree)	120
Electrical Protection	CLASS II - DOUBLE INSULATED, EARTH NOT REQUIRED
IP rating	IP20
Lead and Plug	No
Approvals	RCM
Assembly Required	No
Box Contents	Basic mounting screws,Instruction,Quick Connector Terminal
Installation Required	Yes (by Licensed Electrician only)
Care Instructions	Do not use strong liquid cleaners,Wipe clean with a dry cloth
Replacement Warranty	*3 Years

Barcode

GTIN 9329501057124

Image -dimensions

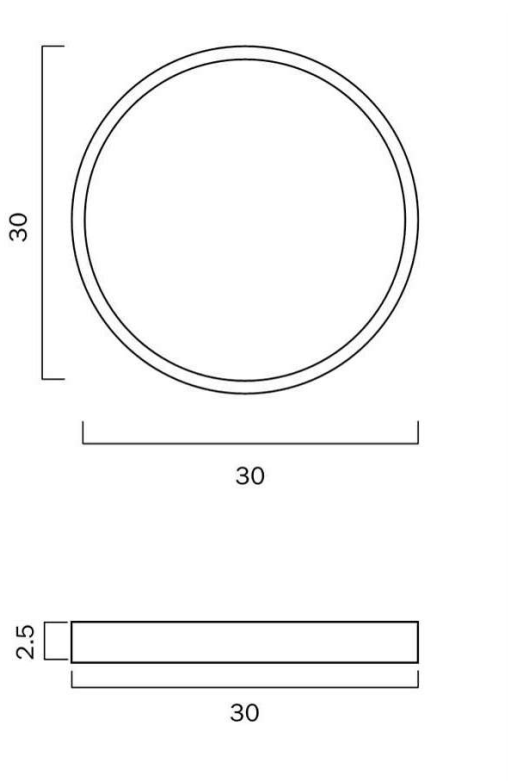

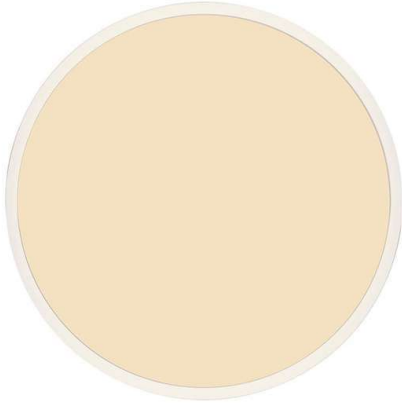

Last modification

2022-11-29

SKY OY40.3C3D-WH
9329501057148



The SKY 40 oyster collection offers a sleek, modern look for your living space. This LED energy-efficient ceiling light fixture comes in an ultra-thin flush mount frame, making it a perfect fit for low ceilings. The color temperature of the light can be pre-set by a hidden select switch and 3 stage dimming is included by simple wall switch cycles. The white acrylic diffuser softens and scatters the throw of light, and a white frame adds a clean, contemporary touch. Perfect for all areas of the home.

Overview

Family name	Sky
Categories	Oysters
Mounting	Surface
This item includes	Diffuser
Usage	Indoor Lighting,Trade Selection
ERAC Product Registration	SAA203056

Color / Material

Fixture Color	White,Opal
Fixture Material	Polycarbonate
Canopy Color	White
Diffuser Color	Opal
Diffuser Material	Polycarbonate

Size

Fixture Diameter (cm)	40.0
Fixture Projection (cm)	2.5
Diffuser Diameter (cm)	40.0

Specification

Voltage Input	240V
Wattage (max)	32
Globe Type	LED integrated SMD
Globe / Light Source qty	1
Globe / Light Source included	Yes
Lumens	3600

All representations within this document are subject to copyright.ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000.
NOTE : All images , descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation.

Color Temperature	Warm White; Natural White; Cool White
Color Kelvin	3 CCT (3000k - 4000k - 6500k)
Color Rendering	>85
Dimmable	Yes - 3 Step by switch (100% - 50% -20%)
Power Factor	>0.90
Surge Protection	Yes (1.5 Kva)
Lumens maintenance	25000 Hrs
Beam Angle (degree)	120
Electrical Protection	CLASS II - DOUBLE INSULATED, EARTH NOT REQUIRED
IP rating	IP20
Lead and Plug	No
Approvals	RCM
Assembly Required	No
Box Contents	Basic mounting screws,Instruction,Quick Connector Terminal
Installation Required	Yes (by Licensed Electrician only)
Care Instructions	Do not use strong liquid cleaners,Wipe clean with a dry cloth
Replacement Warranty	*3 Years

Barcode

GTIN 9329501057148

Image -dimensions

