



# Solar Panels

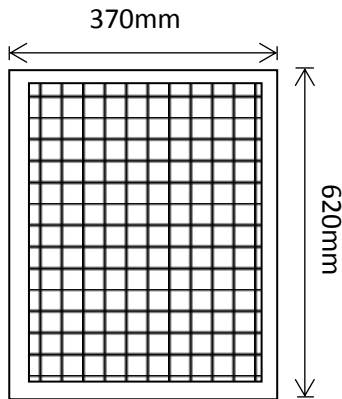

## SLDSP30

### Specifications:


- Max power at STC (Pmax) - 30W
- Optimum operating voltage (Vmp) - 18.2V
- Optimum operating current (Imp) - 1.65A
- Open circuit voltage (Voc) - 22.2V
- Maximum series Fuse - 15A
- Weight - 2.8kg
- Application class - A class
- Operating Temperature : -40 °C to +85 °C
- Maximum System Voltage - 1000V DC

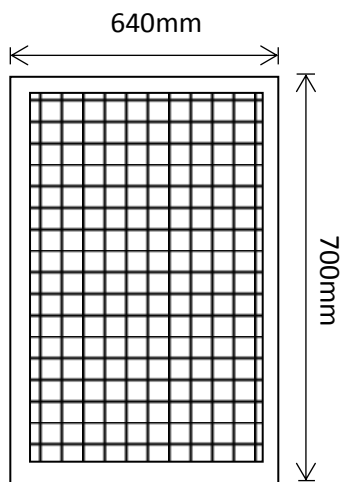

## SLDSP60

### Specifications:

- Max power at STC (Pmax) - 60W
- Optimum operating voltage (Vmp) - 18.2V
- Optimum operating current (Imp) - 3.3A
- Open circuit voltage (Voc) - 22.2V
- Maximum series Fuse - 15A
- Weight - 5.8kg
- Application class - A class
- Operating Temperature : -40 °C to +85 °C
- Maximum System Voltage - 1000V DC

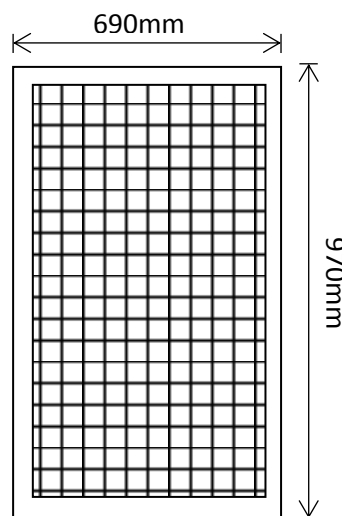

## SLDSP100

### Specifications:

- Max power at STC (Pmax) - 100W
- Optimum operating voltage (Vmp) - 18V
- Optimum operating current (Imp) - 5.56A
- Open circuit voltage (Voc) - 22V
- Maximum series Fuse - 15A
- Weight - 8kg
- Application class - A class
- Operating Temperature : -40 °C to +85 °C
- Maximum System Voltage - 1000V DC

