

## SOLAR-SQR-400 Ceiling Light



### Description

The SOLAR-SQR range of surface mounted LED ceiling lights feature a simple, round and unobtrusive design while providing a 120° beam of uniform light-output through the use of high intensity SMDs (Surface Mounted Diodes).

The SOLAR-SQR is constructed from polycarbonate and rated at IP54, making it ideal for usage in damp locations and in dwellings located close to coastal areas.

SOLAR-SQR LED ceiling lights are available now with TRIO, the added option of changing the colour temperature output of the downlight with a dip switch at the back of the fitting. All models come complete with driver, (fully dimmable with suitable dimmers) have a lifetime of 40,000 hours and are backed by our Three Year Replacement Warranty.



### Specification Features


- Input Voltage: AC 240V
- Power (W): 35W
- IP rating (IP): IP54
- Lumens (lm): Warm White 3000K - 3000lm  
Neutral White 4000K - 3050lm  
White 5700K - 3100lm
- LED type: SMD
- CCT: 3000K - 4000K - 5700K (Switchable)
- CRI: ≥80
- Beam angle (°): 120°
- Dimmable: Yes\*\*
- Lifespan (hrs): 40,000hrs

\* IP54 rating is from the underside of the down light once installed into the ceiling.

\*\* Tested on the Domus \ Dimmer Series May work on others but not tested.



### Diagrams / Additional

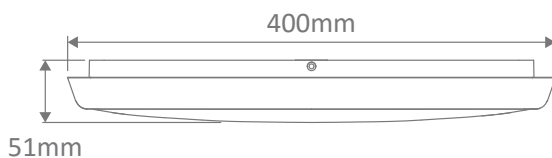

Item No.	Variant	Colour Temp
SOLAR-400-SQR-WHT	20945	TRIO
SOLAR-400-SQR-BLK	20947	TRIO

## SOLAR-SQR-300 Ceiling Light



### Description

The SOLAR-SQR range of surface mounted LED ceiling lights feature a simple, round and unobtrusive design while providing a 120° beam of uniform light-output through the use of high intensity SMDs (Surface Mounted Diodes).

The SOLAR-SQR is constructed from polycarbonate and rated at IP54, making it ideal for usage in damp locations and in dwellings located close to coastal areas.

SOLAR-SQR LED ceiling lights are available now with TRIO, the added option of changing the colour temperature output of the downlight with a dip switch at the back of the fitting. All models come complete with driver, (fully dimmable with suitable dimmers) have a lifetime of 40,000 hours and are backed by our Three Year Replacement Warranty.




### Specification Features

- Input Voltage: AC 240V
- Power (W): 25W
- IP rating (IP): IP54
- Lumens (lm): Warm White 3000K - 2250lm  
Neutral White 4000K - 2300lm  
White 5700K - 2350lm
- LED type: SMD
- CCT: 3000K - 4000K - 5700K (Switchable)
- CRI: ≥80
- Beam angle (°): 120°
- Dimmable: Yes\*
- Lifespan (hrs): 40,000hrs

\* Tested on the Domus Dimmer Series. May work on others but not tested.



### Diagrams / Additional

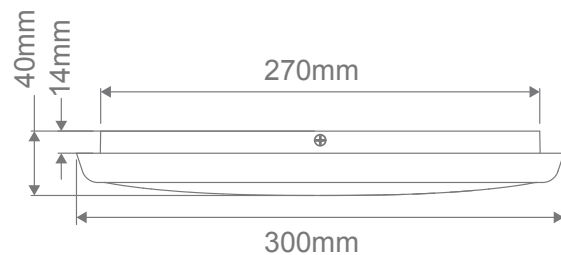

Item No.	Variant	Colour Temp
SOLAR-300-SQR-WHT	20944	TRIO
SOLAR-300-SQR-BLK	20946	TRIO

## SOLAR-200-TRIO Ceiling Light



### Description

The SOLAR TRIO range of surface mounted LED ceiling lights feature a simple, round and slimline design while providing a 120° beam of uniform light-output through the use of high intensity SMDs (Surface Mounted Diodes).

The SOLAR TRIO is available in either a White or Silver body, constructed from polycarbonate and rated at IP54, making it ideal for usage in damp locations and in dwellings located close to coastal areas. Now with TRIO, the added option of changing the colour temperature output of the ceiling light with a dip switch at the back of the fitting.

SOLAR TRIO LED ceiling lights are fully dimmable, have a lifetime of 40 000 hours on average and are backed by our Three Year Replacement Warranty.



### Specification Features

- Input Voltage: AC 240V
- Power (W): 15W
- IP rating (IP): IP54
- Lumens (lm): Warm White 3000K - 1350lm  
Neutral White - 1400lm  
White 5700K - 1450lm
- LED type: SMD
- CCT: 3000K - 4000K -5700K (Switchable)
- CRI: ≥80
- Beam angle (°): 120°
- Dimmable: Yes\*\*
- Lifespan (hrs): 40,000hrs

\*\* Tested on the Domus Dimmer Series. May work on others but not tested.

### Diagrams / Additional



Item No.	Variant	Colour
SOLAR-200-TRIO	20938	White
	20939	Black

## SOLAR-300-TRIO Ceiling Light



### Description

The SOLAR-RND range of surface mounted LED ceiling lights feature a simple, round and unobtrusive design while providing a 120° beam of uniform light-output through the use of high intensity SMDs (Surface Mounted Diodes).

The SOLAR-RND is constructed from polycarbonate and rated at IP54, making it ideal for usage in damp locations and in dwellings located close to coastal areas.

SOLAR-RND LED ceiling lights are available now with TRIO, the added option of changing the colour temperature output of the downlight with a dip switch at the back of the fitting. All models come complete with driver, (fully dimmable with suitable dimmers) have a lifetime of 40,000 hours and are backed by our Three Year Replacement Warranty.




### Specification Features

- Input Voltage: AC 240V
  - Power (W): 25W
  - IP rating (IP): IP54
  - Lumens (lm): Warm White 3000K - 2250lm  
Neutral White 4000K - 2300lm  
White 5700K - 2350lm
  - LED type: SMD
  - CCT: 3000K - 4000K -5700K (Switchable)
  - CRI: ≥80
  - Beam angle (°): 120°
  - Dimmable: Yes\*\*
  - Lifespan (hrs): 40,000hrs
- \*\* Tested on the Domus Dimmer Series. May work on others but not tested.*



### Diagrams / Additional

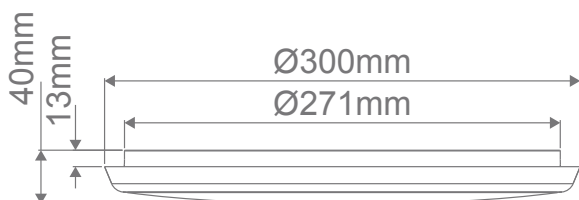

Item No.	Variant	Colour
SOLAR-RND-300-TRIO	20940	White
	20941	Black

## SOLAR-400-TRIO Ceiling Light



### Description

The SOLAR-RND range of surface mounted LED ceiling lights feature a simple, round and unobtrusive design while providing a 120° beam of uniform light-output through the use of high intensity SMDs (Surface Mounted Diodes).

The SOLAR-RND is constructed from polycarbonate and rated at IP54, making it ideal for usage in damp locations and in dwellings located close to coastal areas.

SOLAR-RND LED ceiling lights are available now with TRIO, the added option of changing the colour temperature output of the downlight with a dip switch at the back of the fitting. All models come complete with driver, (fully dimmable with suitable dimmers) have a lifetime of 40,000 hours and are backed by our Three Year Replacement Warranty.




### Specification Features

- Input Voltage: AC 240V
- Power (W): 35W
- IP rating (IP): IP54
- Lumens (lm): Warm White 3000K - 3000lm  
Neutral White 4000K - 3050lm  
White 5700K - 3100lm
- LED type: SMD
- CCT: 3000K - 4000K -5700K (Switchable)
- CRI: ≥80
- Beam angle (°): 120°
- Dimmable: Yes\*\*
- Lifespan (hrs): 40,000hrs

\*\* Tested on the Domus Dimmer Series. May work on others but not tested.



### Diagrams / Additional

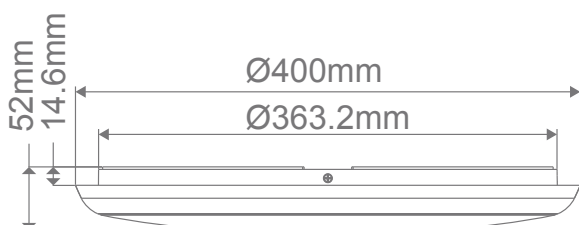

Item No.	Variant	Colour
SOLAR-RND-400-TRIO	20942	White
	20943	Black