

GU10 INTERIOR SURFACE MOUNTED CEILING LIGHTS



SURFACE17



SURFACE18




SURFACE19



SURFACE20




SURFACE21



PRODUCT FEATURES

- Input voltage : 180-265V AC
- Aluminium heat sink
- Chrome plated iron screw
- Max 35W Halogen Globe
- GU10 lampholder
- Globe not included
- Ambient Temp: -20 to 40°C

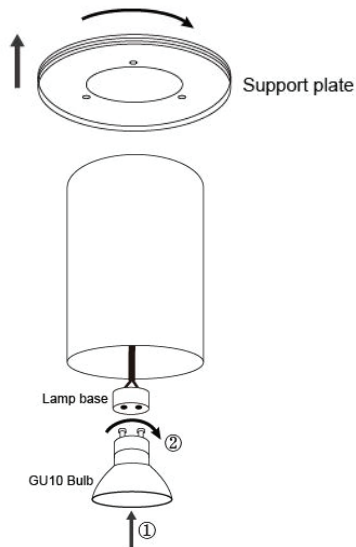

PART NO.	DESCRIPTION	PANTONE COLOUR	LENGTH (mm)	DIAM (mm)	WEIGHT (KG)	BOX (CM)	CARTON QTY
SURFACE17	D/L GU10 (Max 35W HAL) S/M MATT WH RND	WHITE C	135	Ø95	0.065	10 x 10 x 14.5	24
SURFACE18	D/L GU10 (Max 35W HAL) S/M MATT BLK RND	PROCESS BLACK	135	Ø95	0.065	10 x 10 x 14.5	24
SURFACE19	D/L GU10 (Max 35W HAL) S/M Powder Pink RND	14-1511TPX	135	Ø95	0.065	10 x 10 x 14.5	24
SURFACE20	D/L GU10 (Max 35W HAL) S/M Bright Gold RND	16-0947TPX	135	Ø95	0.065	10 x 10 x 14.5	24
SURFACE21	D/L GU10 (Max 35W HAL) S/M Coffee Liqueur RND	18-0930TPX	135	Ø95	0.065	10 x 10 x 14.5	24

UPDATED ON 19/12/2017

Tel: (02) 9938 7100 | Fax: (02) 9938 7115 | Email: sales@clalighting.com.au

Website: www.clalighting.com.au

Follow us: facebook.com/CLALighting

CLA LIGHTING