


# Surface Mounted **ceiling lights** (DIMMABLE)



## PRODUCT FEATURES

- Input voltage: 180-265V AC 50/60Hz
- SMD2835 LED chips
- Power factor: 0.9
- Material: PC body, PMMA frosted diffuser
- Designed in Australia
- Ambient temp: -20 to 40°C
- Suitable for use with 3 wire motion or microwave sensor
- Suitable for 2-way switching
- Large terminal holes for easy connection

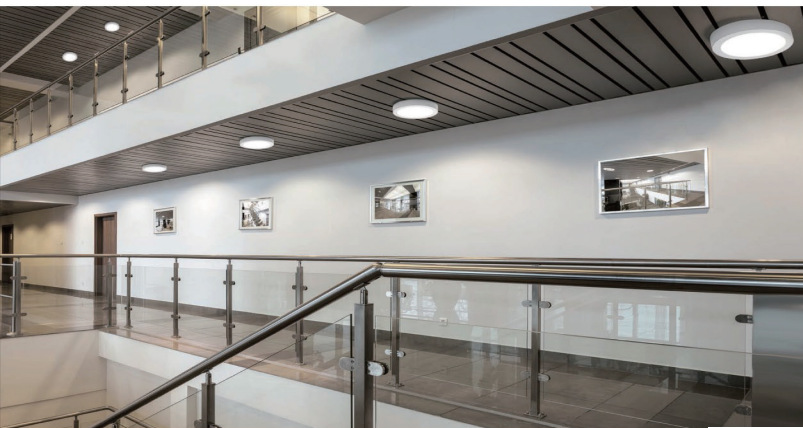

## RECOMMENDED DIMMERS:

BRAND	CODE	PCS/DIMMER
CLA - Trailing Edge	VELA	SURFACE4D: 2-14PCS
Dignet - Ledsmart	MMDM/PB	SURFACE5D: 2-9PCS
Dignet - Ledsmart	MMDM/RT	
Clipsal - Universal	32ELEDM	SURFACE7D: 2-14PCS
Clipsal - Universal	32E450UDM	SURFACE9D: 2-5PCS
HPM - Trailing Edge	CAT400T	SURFACE12D: 2-5PCS

CODE	DESCRIPTION	KELVIN (K)	LUMENS (LM)	WATT (W)	CRI	DIAM/ WIDTH (MM)	DEPTH (MM)	CARTON QTY
<b>SURFACE4D</b>	D/L LED S/M DIMM WH RND 5000K 6W	5000	480	6	82	Ø120	40	1/4
<b>SURFACE5D</b>	D/L LED S/M DIMM WH RND 5000K 12W	5000	960	12	82	Ø178	40	1/20
<b>SURFACE7D</b>	OYSTER DIMM LED S/M WH SQ 3000K 6W	3000	450	6	82	120x120	40	1/40
<b>SURFACE9D</b>	OYSTER DIMM LED S/M WH SQ 3000K 18W	3000	1450	18	82	225x225	40	1/20
<b>SURFACE12D</b>	OYSTER DIMM LED S/M WH SQ 5000K 18W	5000	1550	18	82	225x225	40	1/20