

240V 50Hz **20W** 1600lm

40W 3200lm

6W SUSTAIN LAMP SMD LED











19997 ONLY 19998 ONLY 19992 ONLY

The Stellar LED battens feature an IP65 weather-resistant rating and an IK08 vandal- resistant rating.

FEATURES

- Corrosion resistant, IP65 weatherproof polycarbonate body
- Vandal-resistant IK08 rated.
- UV stabilised high impact polycarbonate cover.
- Stainless steel mounting brackets for easy installation.
- Compliant to AS/NZS 2293
- Ceiling mount.


EMERGENCY MODEL FEATURES

- C0: D25; C90: D63 classifications
- High density storage LiCoO2 (3600mAh) batteries
- 2 Hour duration period
- Charger type: Trickle
- Charger time: 16 Hours
- Charger operation: Continuous

APPLICATIONS

Wet rooms, commercial and interior applications, coastal environment, apartments, shopping centres, carparks, stairwells, hospitality, prisons and hospitals.

MODEL NO.	PRODUCT	WATTAGE (W)	LENGTH (M)	FITTING COLOUR
19997/08	NON-EMERGENCY MODEL	20	0.6	GREY
19998/08	NON-EMERGENCY MODEL	40	1.2	GREY
19992/08	EMERGENCY MODEL	40	1.2	GREY

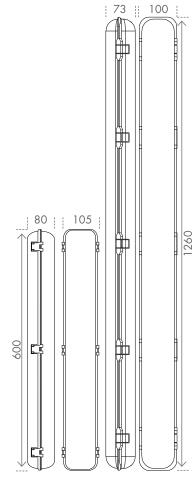

Brilliant Lighting (Aust) Pty Ltd