


**SUMMARY**

The SupValue A60 is a dimmable LED light globe that is suitable for commercial or residential applications. Featuring a frosted finish, this globe has been engineered to provide longevity and high lumen efficacy. The SupValue A60 globe is an energy saving alternative or replacement to traditional A60 incandescent or halogen globes. It can also be retrofitted to existing compatible sockets.

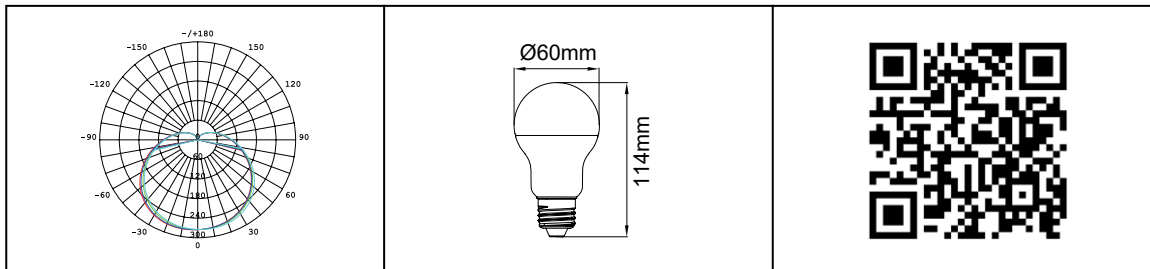

**PRODUCT DATA**

|                 |   |
|-----------------|---|
| Order Code      | 112119A   |
| Voltage         | 220-240V  |
| Wattage         | 14.3W   |
| Lumen Output    | 1670Lm  |
| CCT             | 6500K   |
| CRI Rating      | Ra≥80   |
| Beam Angle      | 200°  |
| Light Source    | SMD Chips   |
| Dimmable        | Yes. Leading or Trailing Edge, Universal<br>(Refer to Compatibility List) |
| Cap Type        | E27   |
| Construction    | Polycarbonate   |
| Fitting Colour  | White   |
| PF              | 0.7   |
| Net Weight (kg) | 0.08  |
| Lifetime L70B50 | 15,000 hours  |
| Warranty        | 3 years   |



- Designed for domestic use where higher lumen output is needed.



High output and low energy

## FEATURES

- High lumen output efficiency
- Edison screw and bayonet cap available
- Long lifetime 15000hrs
- Low surface temperature for extra safety

## DIMMING OPTIONS

- Trailing and Leading Edge
- Universal

## APPLICATIONS

- Residential
- Retail
- Cafes
- Restaurants
- Display areas
- Atriums and heritage applications

## WARRANTY

- Three years (subject to terms and conditions)

| CERTIFICATION | DIMMABLE                      | DISTRIBUTION | DIMENSIONS(mm) |
|---------------|-------------------------------|--------------|----------------|
|               | <br>leading and trailing edge |              |                |

| Part No. | Model No.       | Voltage  | Watt. | PF  | CCT.  | Cap | Ra  | Lumen  | Beam Angle | Lifetime L70B50 |
|----------|-----------------|----------|-------|-----|-------|-----|-----|--------|------------|-----------------|
| 112115   | YKA67C2-D-15.5W | 220-240V | 15.5W | 0.9 | 3000K | E27 | ≥80 | 1521lm | 200°       | 15000h          |
| 112116   | YKA67C2-D-15.5W | 220-240V | 15.5W | 0.9 | 3000K | B22 | ≥80 | 1521lm | 200°       | 15000h          |
| 112117   | YKA67C2-D-15.5W | 220-240V | 15.5W | 0.9 | 4000K | E27 | ≥80 | 1521lm | 200°       | 15000h          |
| 112118   | YKA67C2-D-15.5W | 220-240V | 15.5W | 0.9 | 4000K | B22 | ≥80 | 1521lm | 200°       | 15000h          |
| 112119   | YKA67C2-D-15.5W | 220-240V | 15.5W | 0.9 | 6500K | E27 | ≥80 | 1521lm | 200°       | 15000h          |
| 112120   | YKA67C2-D-15.5W | 220-240V | 15.5W | 0.9 | 6500K | B22 | ≥80 | 1521lm | 200°       | 15000h          |

[1]Operating Frequency=50/60Hz

[2]Switch Times≥20000

[3] For dimming compatibility please see page 92

