


# TORRE

## EXTERIOR SURFACE MOUNTED WALL & BOLLARD LIGHTS

- Input voltage range: 220-240V AC 50/60Hz
- Housing: 304 stainless steel
- Diffuser: opal PC (Ø76 x H 160mm)
- Lamp holder: E27 (Max.18W)
- Globe not included
- Recommended CLA globes: 3U001-003 (when used with external control gear), CAN & LT series
- For bollard lights, to maintain the IP rating please use circular cable in junction
- For bollard lights, for parallel and single connection we recommend using an appropriate IP68 connector (CLA Connector: CONN001 & CONN002)

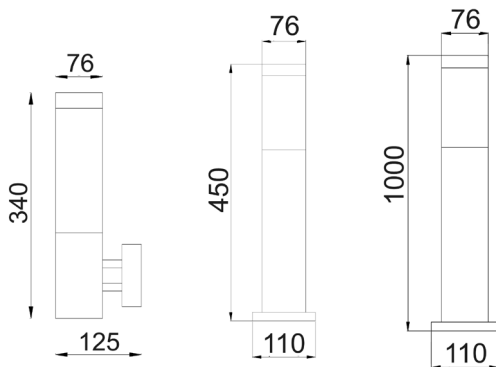

**NOTE:**

- \*These bollards are designed for mounting on a solid surface such as a concrete path or sturdy timber decking
- \*Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments.
- \*To avoid disappointment and warranty problems, please ensure the IP Rating of the chosen product is relevant for the intended use.



**TORRE1**  
(Black / Wall Light)



**TORRE2**  
(SS / Wall Light)



**TORRE3**  
(Black / Bollard Light)



**TORRE4**  
(SS / Bollard Light)

Part No.	Description	Diam	Height	Base	Box Weight	Box Dimensions	Carton QTY
TORRE1	WALL ES S/M FIXED SS304 BLACK RND	Ø76mm	340mm	Ø110mm	0.8kg	15x15x36cm	1/10
TORRE2	WALL ES S/M FIXED SS304 RND	Ø76mm	340mm	Ø110mm	0.8kg	15x15x36cm	1/10
TORRE3	BOLLARD SHORT SS304 ES BLK	Ø76mm	450mm	Ø110mm	0.8kg	13x13x46cm	1/10
TORRE4	BOLLARD SHORT SS304 ES	Ø76mm	450mm	Ø110mm	0.8kg	13x13x46cm	1/10
TORRE5	BOLLARD LONG SS304 BLACK ES	Ø76mm	1000mm	Ø110mm	1.5kg	13x13x102cm	1/10
TORRE6	BOLLARD LONG SS304 ES	Ø76mm	1000mm	Ø110mm	1.5kg	13x13x102cm	1/10

Exterior Lighting