



# UMBRA PROFESSIONAL IP65

Professional IP65 Weatherproof Batten, DALI Tuneable

White (DT8-Tc)

## FEATURES

- Smartest and most feature inclusive batten on the market. Provides long life and unrivaled control.
- Tuneable white (DT8-Tc) driver and LED allows tuning of the white colour to suit the application or time of day.
- Flicker-free dimming throughout the dimming range which allows light level adjustment to gain maximum power savings.
- IP65 weatherproof rating and IK08 impact rating.
- LED lifetime >120,000 hours (L70), 90,000 hours (L80) and 43,000 hours (L90).
- 12 years design life at max. ambient
- Microwave sensor suitable for DALI-2 (IEC 62386-303) allows unlimited control on DALI-2 compliant control systems.
- Full support for DALI and DALI-2 (IEC 62386) DT6 (LED) and DT8 (Tuneable white).
- Corridor mode support in standalone mode to intelligently save power by turning off when there is no occupancy.
- Power monitoring (DT51) allows control systems to monitor and report active power and total power consumption.
- Built-in DALI-2 switch can be used for standalone control or unlimited control with DALI-2 compliant control systems.
- Lynk wireless control allows for remote test and monitoring and provides full lighting control (AS/NZS 62386-104).



## ORDERING INFORMATION

<b>Order code</b>	12612
<b>Description</b>	Ektor Lynk Umbra 600mm LED IP65 batten w/sensor - PRO w/wireless
<b>Driver Type</b>	Wireless (IEC62386-104) with DT8 Dimmable
Wireless ~ Includes Wireless Driver with full support for DT6 and DT8-tc allowing flicker free dimming and colour control with compliant IEC62386-104 Application controllers.	
<b>Item Code</b>	EV-UMBRA-PRO-IP65-600-S-LK

## MECHANICAL

<b>Body Material</b>	Polycarbonate
<b>Diffuser Material</b>	Polycarbonate
<b>Fitting Colour</b>	Grey
<b>IK Rating</b>	IK08
<b>Installation Type</b>	Surface mount
<b>IP Rating</b>	IP65



## ELECTRICAL

<b>Electrical Rating</b>	Class I
<b>Input Frequency</b>	50 Hz
<b>Input voltage</b>	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
<b>Maximum Wattage</b>	20 W
<b>Power Factor</b>	0.95
<b>Standby Power</b>	0.3 W
Standby power for non-maintained/switched maintained emergency devices is measured when the light is off and the charger is in standby mode. For maintained emergency devices, standby power is measured when the light is on and the charger is in standby mode. Typically, charging occurs for the first 16 hours after the device is powered or after a battery discharge.	
<b>Switch Type</b>	Inbuilt Mains Rated DALI Switch
A Terminal input has been provided to allow the wiring of a Main rated switch input. This input can be programmed to switch any controlled area when using a DALI-2 compliant control system. This input supports IEC62386-301 (momentary or rocker switches), IEC62386-302 (on /off switches) and IEC62386-303 (mains rated sensor inputs).	
<b>Working Temp Range</b>	0 to 40 °C

## LAMP

<b>Macadam Steps (SDCM)</b>	3-step MacAdam Ellipse
<b>CCT Configuration</b>	TUNEABLE WHITE
Full support for DALI-2 DT8 has been provided which allows White colour control on a compliant DALI-2 control system. This function can be used to set a desired colour or to transition between colours depending on the time of day.	
<b>CRI</b>	>84
<b>Lamp/LED Current</b>	650 mA
<b>Lamp/LED voltage</b>	24 V

## LED LIFETIME

<b>LED Lifetime</b>	>120000 hrs	
This is the Reported LED Lifetime in Hours based on TM-21. Ektor does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below.		
<b>Ambient Temp (°C)</b>	25 °C	40 °C
<b>L90B10</b>	43000 hrs	43000 hrs
<b>L80B10</b>	90000 hrs	90000 hrs
<b>L70B10</b>	>120000 hrs	>120000 hrs
This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the proceeding number gives the resultant lumen output at the end of it reported lifetime. L70, would mean 30% lumen depreciation which means 70% of its initial output and is tested accordingly to TM-21. The B part refers to failures, which can be define as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime, the system will reach the defined lumen depreciation and the average led failures is defined by the B rating. The B rating is defined in and tested to IEC62717.		

<b>TM-21 Test Hours</b>	20000 hrs
-------------------------	-----------

## COLOUR TEMPERATURE

<b>CCT</b>	3000 to 6500
<b>CCT Colour</b>	Tunable White
<b>Luminaire Lumens</b>	>2000 lm
All photometric data has a tolerance of ±10%. Luminaire lumens refers to the exit lumens or delivered lumens from the luminaire.	

## DRIVER

<b>Dimmable</b>	Yes
<b>Driver Included</b>	Yes
<b>Integrated Driver</b>	No
<b>Driver Type</b>	Wireless (IEC62386-104) with DT8 Dimmable
Wireless ~ Includes Wireless Driver with full support for DT6 and DT8-tc allowing flicker free dimming and colour control with compliant IEC62386-104 Application controllers.	

<b>Power Monitoring</b>	DALI Device type 51 power monitoring
-------------------------	--------------------------------------

Inbuilt DALI-2 support for Device type 51 - Power monitoring for use with DALI-2 compliant control systems which allows the reporting of the products total power consumption for power aggregation and measurements.

<b>Wiring Type</b>	Re-wireable terminal block (6 pin)
--------------------	------------------------------------

## SENSOR (S SUFFIX)

<b>Adjustable Detection Area / Sensitivity</b>	Yes
<b>Adjustable Hold Time</b>	Yes
<b>Adjustable Standby Level</b>	Yes
<b>Adjustable Standby Period</b>	Yes
<b>Corridor Function</b>	Yes
<b>Dawn Reset</b>	No
<b>Detection Range</b>	10 m
<b>Dusk Mode</b>	No
<b>Lux Adjustment</b>	No
<b>Manual Override</b>	Yes
<b>Sensor Communication</b>	DALI 2
Inbuilt DALI-2 Sensor for use with DALI-2 Compliant control systems. Some features and functions are only available for use with DALI-2 Application controllers which support the features. This product also supports a standalone mode for limited use without a DALI-2 application controller.	
<b>Sensor Type</b>	Microwave
<b>Switched Output</b>	No
<b>Time Delay</b>	Via DALI

## COMPLIANCE

**Product Design Life** 12 years

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

**Standards**

- AS/NZS 60598.1
- AS/NZS 60598.2.1
- AS/NZS 61347.1
- AS/NZS 61347.2.13
- AS CISPR 15
- AS/NZS 4268
- IEC 62386-102
- IEC 62386-103
- IEC 62386-104

## WARRANTY

**Commercial Use Warranty** 5Y return to base on General lighting components  
First 2Y includes an exclusive onsite warranty

**Warranty Operating Hours** 30000 hrs

This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

## DIMENSIONS


**Product Height** 93 mm

**Product Length** 650 mm


**Product Width** 130 mm

## PHOTOMETRICS


EV/UMBRA/PRO/IP65/600/6500K

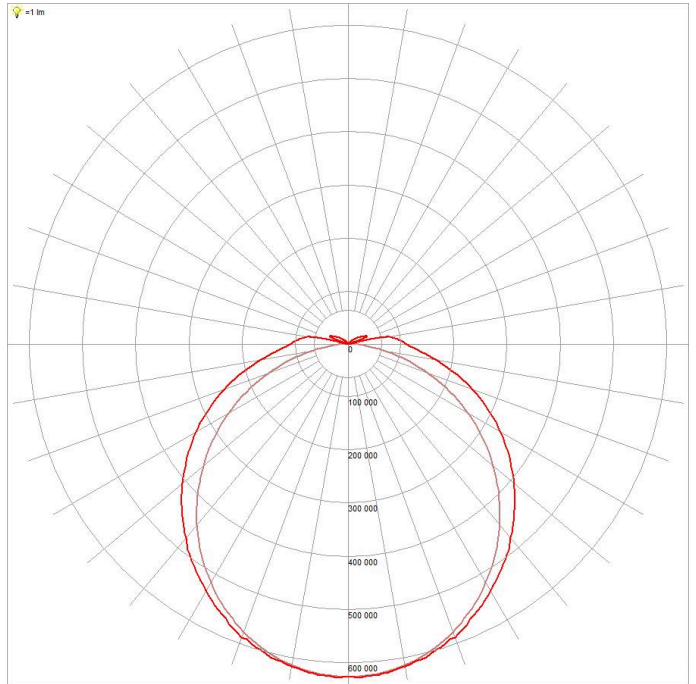


EV/UMBRA/PRO/IP65/600/3000K

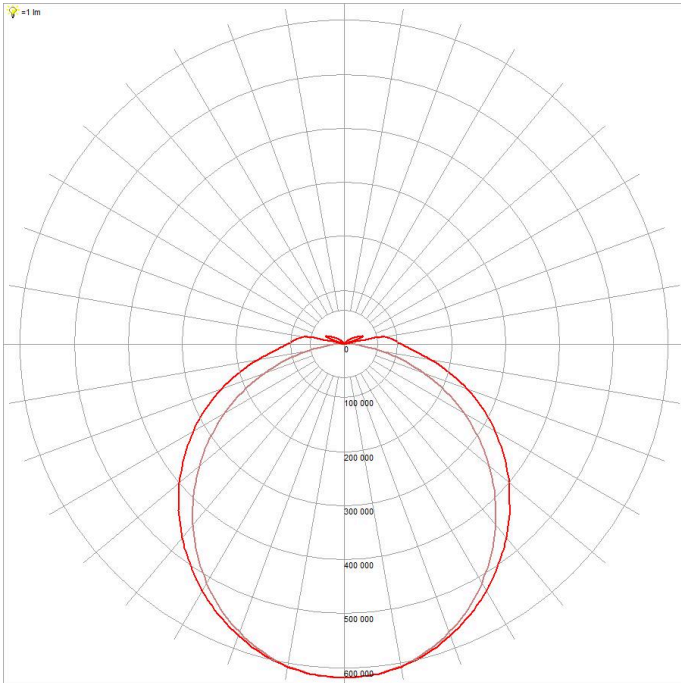

EV/UMBRA/PRO/IP65/600/5000K

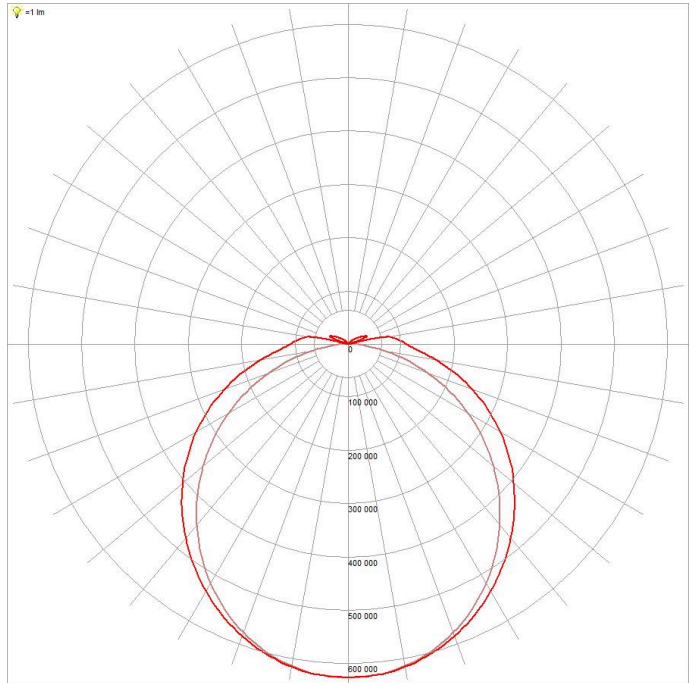

EV/UMBRA/PRO/IP65/600/4000K

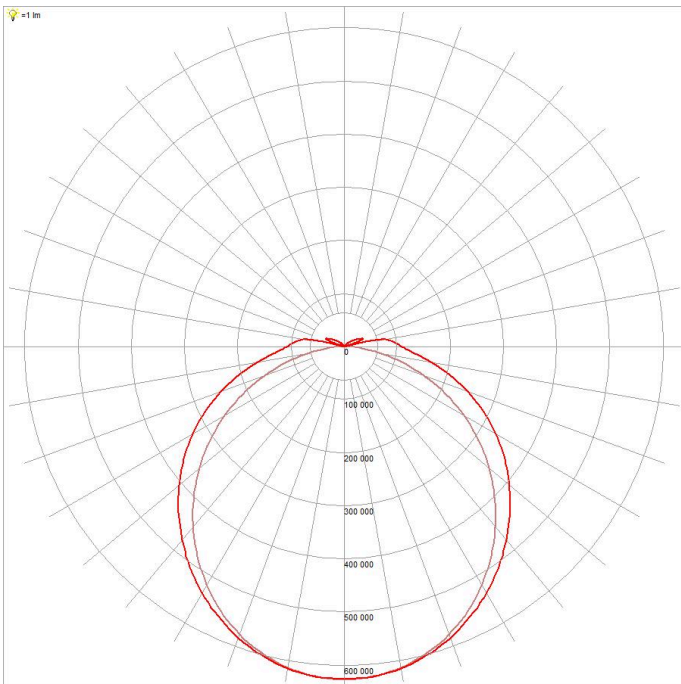

# UMBRA PROFESSIONAL IP65

Professional IP65 Weatherproof Batten, DALI Tuneable

White (DT8-Tc)

## FEATURES

- Smartest and most feature inclusive batten on the market. Provides long life and unrivaled control.
- Tuneable white (DT8-Tc) driver and LED allows tuning of the white colour to suit the application or time of day.
- Flicker-free dimming throughout the dimming range which allows light level adjustment to gain maximum power savings.
- IP65 weatherproof rating and IK08 impact rating.
- LED lifetime >120,000 hours (L70), 90,000 hours (L80) and 43,000 hours (L90).
- 12 years design life at max. ambient
- Microwave sensor suitable for DALI-2 (IEC 62386-303) allows unlimited control on DALI-2 compliant control systems.
- Full support for DALI and DALI-2 (IEC 62386) DT6 (LED) and DT8 (Tuneable white).
- Corridor mode support in standalone mode to intelligently save power by turning off when there is no occupancy.
- Power monitoring (DT51) allows control systems to monitor and report active power and total power consumption.
- Built-in DALI-2 switch can be used for standalone control or unlimited control with DALI-2 compliant control systems.



ORDERING INFORMATION	
<b>Order code</b>	12090
<b>Description</b>	UMBRA PRO 600mm Weatherproof LED batten with sensor
<b>Driver Type</b>	DALI DT8 Dimmable
DALI DT8 ~ Includes DALI-2 Driver with full support for DT6 and DT8-tc allowing flicker free dimming and colour control with compliant DALI-2 Application controllers.	
<b>Item Code</b>	EV-UMBRA-PRO-IP65-600-S

MECHANICAL	
<b>Body Material</b>	Polycarbonate
<b>Diffuser Material</b>	Polycarbonate
<b>Fitting Colour</b>	Grey
<b>IK Rating</b>	IK08
<b>Installation Type</b>	Surface mount
<b>IP Rating</b>	IP65



ELECTRICAL	
<b>Electrical Rating</b>	Class I
<b>Input Frequency</b>	50 Hz
<b>Input voltage</b>	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
<b>Maximum Wattage</b>	20 W
<b>Power Factor</b>	0.95
<b>Standby Power</b>	0.3 W
Standby power for non-maintained/switched maintained emergency devices is measured when the light is off and the charger is in standby mode. For maintained emergency devices, standby power is measured when the light is on and the charger is in standby mode. Typically, charging occurs for the first 16 hours after the device is powered or after a battery discharge.	
<b>Switch Type</b>	Inbuilt Mains Rated DALI Switch
A Terminal input has been provided to allow the wiring of a Main rated switch input. This input can be programmed to switch any controlled area when using a DALI-2 compliant control system. This input supports IEC62386-301 (momentary or rocker switches), IEC62386-302 (on /off switches) and IEC62386-303 (mains rated sensor inputs).	
<b>Working Temp Range</b>	0 to 40 °C

LAMP	
<b>Macadam Steps (SDCM)</b>	3-step MacAdam Ellipse
<b>CCT Configuration</b>	TUNEABLE WHITE
Full support for DALI-2 DT8 has been provided which allows White colour control on a compliant DALI-2 control system. This function can be used to set a desired colour or to transition between colours depending on the time of day.	
<b>CRI</b>	>84
<b>Lamp/LED Current</b>	650 mA
<b>Lamp/LED voltage</b>	24 V

LED LIFETIME		
<b>LED Lifetime</b>	>120000 hrs	
This is the Reported LED Lifetime in Hours based on TM-21. Ektor does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below.		
<b>Ambient Temp (°C)</b>	25 °C	40 °C
<b>L90B10</b>	43000 hrs	43000 hrs
<b>L80B10</b>	90000 hrs	90000 hrs
<b>L70B10</b>	>120000 hrs	>120000 hrs
This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the proceeding number gives the resultant lumen output at the end of it reported lifetime. L70, would mean 30% lumen depreciation which means 70% of its initial output and is tested accordingly to TM-21. The B part refers to failures, which can be define as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime, the system will reach the defined lumen depreciation and the average led failures is defined by the B rating. The B rating is defined in and tested to IEC62717.		

<b>TM-21 Test Hours</b>	20000 hrs
-------------------------	-----------

COLOUR TEMPERATURE	
<b>CCT</b>	3000 to 6500
<b>CCT Colour</b>	Tunable White
<b>Luminaire Lumens</b>	>2000 lm
All photometric data has a tolerance of ±10%. Luminaire lumens refers to the exit lumens or delivered lumens from the luminaire.	

DRIVER	
<b>Dimmable</b>	Yes
<b>Driver Included</b>	Yes
<b>Integrated Driver</b>	No
<b>Driver Type</b>	DALI DT8 Dimmable
DALI DT8 ~ Includes DALI-2 Driver with full support for DT6 and DT8-tc allowing flicker free dimming and colour control with compliant DALI-2 Application controllers.	
<b>Power Monitoring</b>	DALI Device type 51 power monitoring
Inbuilt DALI-2 support for Device type 51 - Power monitoring for use with DALI-2 compliant control systems which allows the reporting of the products total power consumption for power aggregation and measurements.	
<b>Wiring Type</b>	Re-wireable terminal block (6 pin)

SENSOR (S SUFFIX)	
<b>Adjustable Detection Area / Sensitivity</b>	Yes
<b>Adjustable Hold Time</b>	Yes
<b>Adjustable Standby Level</b>	Yes
<b>Adjustable Standby Period</b>	Yes
<b>Corridor Function</b>	Yes
<b>Dawn Reset</b>	No
<b>Detection Range</b>	10 m
<b>Dusk Mode</b>	No
<b>Lux Adjustment</b>	No
<b>Manual Override</b>	Yes
<b>Sensor Communication</b>	DALI 2
Inbuilt DALI-2 Sensor for use with DALI-2 Compliant control systems. Some features and functions are only available for use with DALI-2 Application controllers which support the features. This product also supports a standalone mode for limited use without a DALI-2 application controller.	
<b>Sensor Type</b>	Microwave
<b>Switched Output</b>	No
<b>Time Delay</b>	Via DALI

## COMPLIANCE

**Product Design Life** 12 years

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

**Standards**

- AS/NZS 60598.1
- AS/NZS 60598.2.1
- AS CISPR 15
- AS/NZS 61347.1
- AS/NZS 61347.2.13
- AS/NZS 4268
- IEC 62386-102
- IEC 62386-103

## WARRANTY

**Commercial Use Warranty** 5Y return to base on General lighting components  
First 2Y includes an exclusive onsite warranty

**Warranty Operating Hours** 30000 hrs

This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

## DIMENSIONS


**Product Height** 93 mm

**Product Length** 650 mm


**Product Width** 130 mm

## PHOTOMETRICS


EV/UMBRA/PRO/IP65/600/6500K

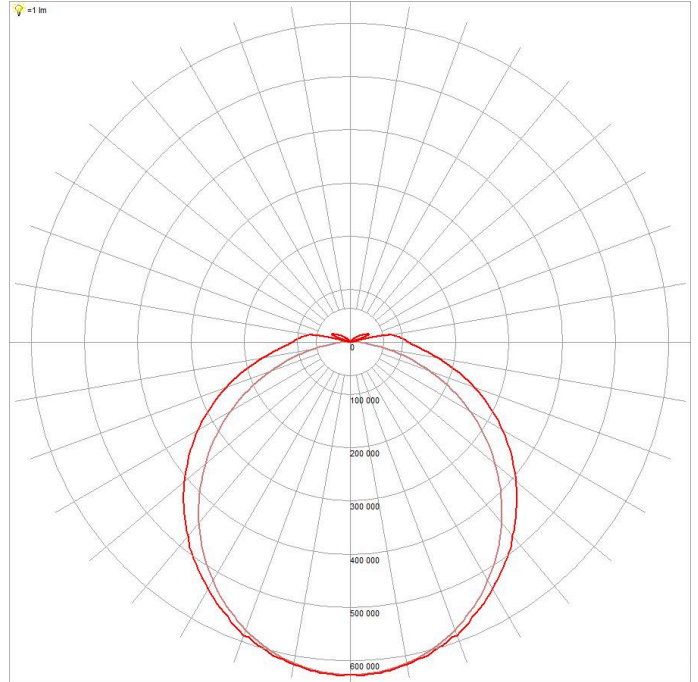

EV/UMBRA/PRO/IP65/600/3000K

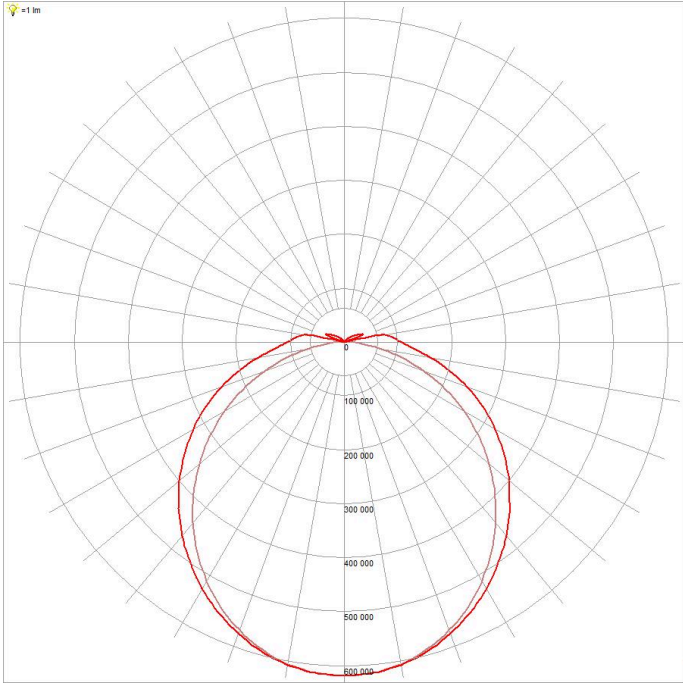


EV/UMBRA/PRO/IP65/600/4000K

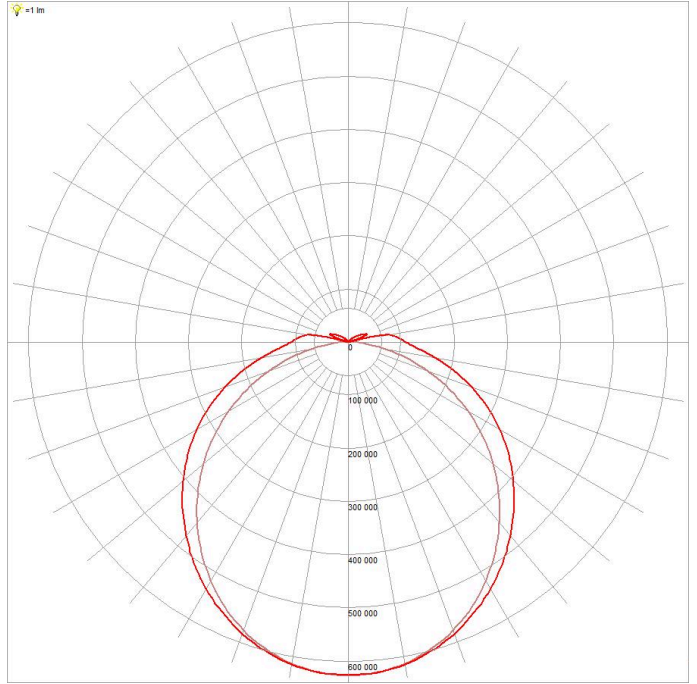

EV/UMBRA/PRO/IP65/600/5000K



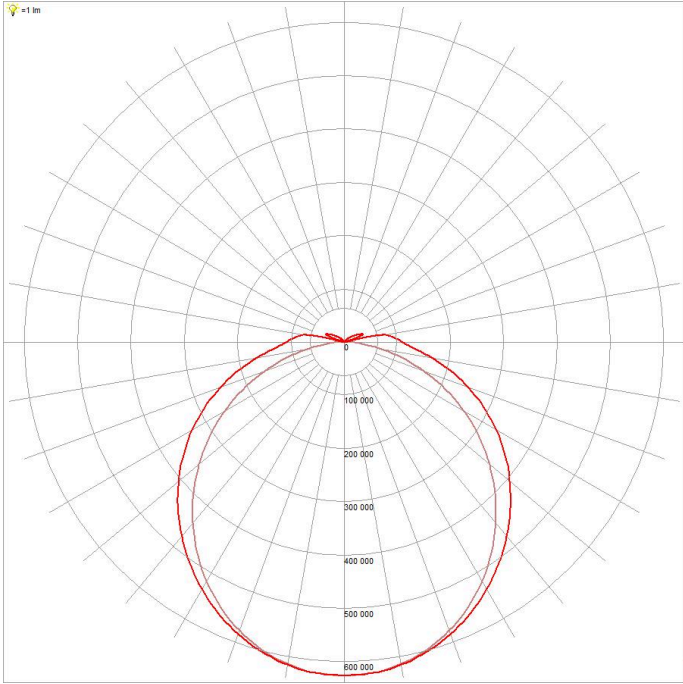


# UMBRA PROFESSIONAL IP65

Professional IP65 Weatherproof Batten, DALI Tuneable

White (DT8-Tc)

## FEATURES

- Smartest and most feature inclusive batten on the market. Provides long life and unrivaled control.
- Tuneable white (DT8-Tc) driver and LED allows tuning of the white colour to suit the application or time of day.
- Flicker-free dimming throughout the dimming range which allows light level adjustment to gain maximum power savings.
- IP65 weatherproof rating and IK08 impact rating.
- LED lifetime >120,000 hours (L70), 90,000 hours (L80) and 43,000 hours (L90).
- 12 years design life at max. ambient
- Full support for DALI and DALI-2 (IEC 62386) DT6 (LED) and DT8 (Tuneable white).
- Power monitoring (DT51) allows control systems to monitor and report active power and total power consumption.
- Built-in DALI-2 switch can be used for standalone control or unlimited control with DALI-2 compliant control systems.
- Lynk wireless control allows for remote test and monitoring and provides full lighting control (AS/NZS 62386-104).

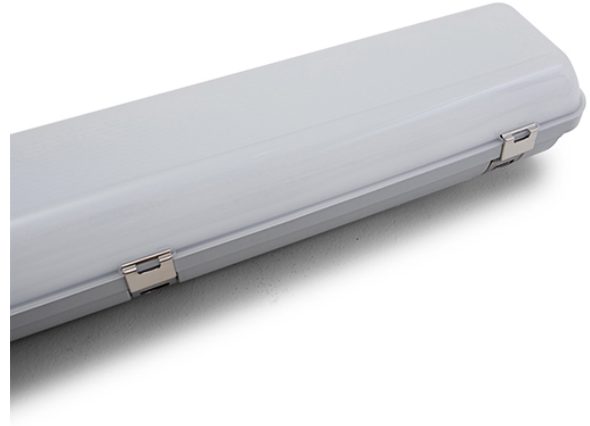

## ORDERING INFORMATION

<b>Order code</b>	12610
<b>Description</b>	Ektor Lynk Umbra 600mm LED IP65 batten - PRO w/wireless
<b>Driver Type</b>	Wireless (IEC62386-104) with DT8 Dimmable
Wireless ~ Includes Wireless Driver with full support for DT6 and DT8-tc allowing flicker free dimming and colour control with compliant IEC62386-104 Application controllers.	
<b>Item Code</b>	EV-UMBRA-PRO-IP65-600-LK

## MECHANICAL

<b>Body Material</b>	Polycarbonate
<b>Diffuser Material</b>	Polycarbonate
<b>Fitting Colour</b>	Grey
<b>IK Rating</b>	IK08
<b>Installation Type</b>	Surface mount
<b>IP Rating</b>	IP65

## ELECTRICAL

<b>Electrical Rating</b>	Class I
<b>Input Frequency</b>	50 Hz
<b>Input voltage</b>	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
<b>Maximum Wattage</b>	20 W
<b>Power Factor</b>	0.95



**Standby Power** 0.3 W

Standby power for non-maintained/switched maintained emergency devices is measured when the light is off and the charger is in standby mode. For maintained emergency devices, standby power is measured when the light is on and the charger is in standby mode. Typically, charging occurs for the first 16 hours after the device is powered or after a battery discharge.

**Switch Type** Inbuilt Mains Rated DALI Switch

A Terminal input has been provided to allow the wiring of a Main rated switch input. This input can be programmed to switch any controlled area when using a DALI-2 compliant control system. This input supports IEC62386-301 (momentary or rocker switches), IEC62386-302 (on /off switches) and IEC62386-303 (mains rated sensor inputs).

**Working Temp Range** 0 to 40 °C

**LAMP**

**Macadam Steps (SDCM)** 3-step MacAdam Ellipse

**CCT Configuration** TUNEABLE WHITE

Full support for DALI-2 DT8 has been provided which allows White colour control on a compliant DALI-2 control system. This function can be used to set a desired colour or to transition between colours depending on the time of day.

**CRI** >84

**Lamp/LED Current** 650 mA

**Lamp/LED voltage** 24 V

**LED LIFETIME**

**LED Lifetime** >120000 hrs

This is the Reported LED Lifetime in Hours based on TM-21. Ektor does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below.

**Ambient Temp (°C)** 25 °C 40 °C

**L90B10** 43000 hrs 43000 hrs

**L80B10** 90000 hrs 90000 hrs

**L70B10** >120000 hrs >120000 hrs

This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the proceeding number gives the resultant lumen output at the end of it reported lifetime. L70, would mean 30% lumen depreciation which means 70% of its initial output and is tested accordingly to TM-21. The B part refers to failures, which can be define as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime, the system will reach the defined lumen depreciation and the average led failures is defined by the B rating. The B rating is defined in and tested to IEC62717.

**TM-21 Test Hours** 20000 hrs

**COLOUR TEMPERATURE**

**CCT** 3000 to 6500

**CCT Colour** Tunable White

**Luminaire Lumens** >2000 lm

All photometric data has a tolerance of ±10%. Luminaire lumens refers to the exit lumens or delivered lumens from the luminaire.

**DRIVER**

**Dimmable** Yes

**Driver Included** Yes

**Integrated Driver** No

**Driver Type** Wireless (IEC62386-104) with DT8 Dimmable

Wireless ~ Includes Wireless Driver with full support for DT6 and DT8-tc allowing flicker free dimming and colour control with compliant IEC62386-104 Application controllers.

**Power Monitoring** DALI Device type 51 power monitoring

Inbuilt DALI-2 support for Device type 51 - Power monitoring for use with DALI-2 compliant control systems which allows the reporting of the products total power consumption for power aggregation and measurements.

**Wiring Type** Re-wireable terminal block (6 pin)

**COMPLIANCE**

**Product Design Life** 12 years

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

- Standards**
- AS/NZS 60598.1
  - AS/NZS 60598.2.1
  - AS/NZS 61347.1
  - AS/NZS 61347.2.13
  - AS CISPR 15
  - AS/NZS 4268
  - IEC 62386-102
  - IEC 62386-103
  - IEC 62386-104

**WARRANTY**

**Commercial Use Warranty** 5Y return to base on General lighting components  
First 2Y includes an exclusive onsite warranty

**Warranty Operating Hours** 30000 hrs


This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

### DIMENSIONS


Product Height	93 mm
Product Length	650 mm
Product Width	130 mm

### PHOTOMETRICS


EV/UMBRA/PRO/IP65/600/6500K

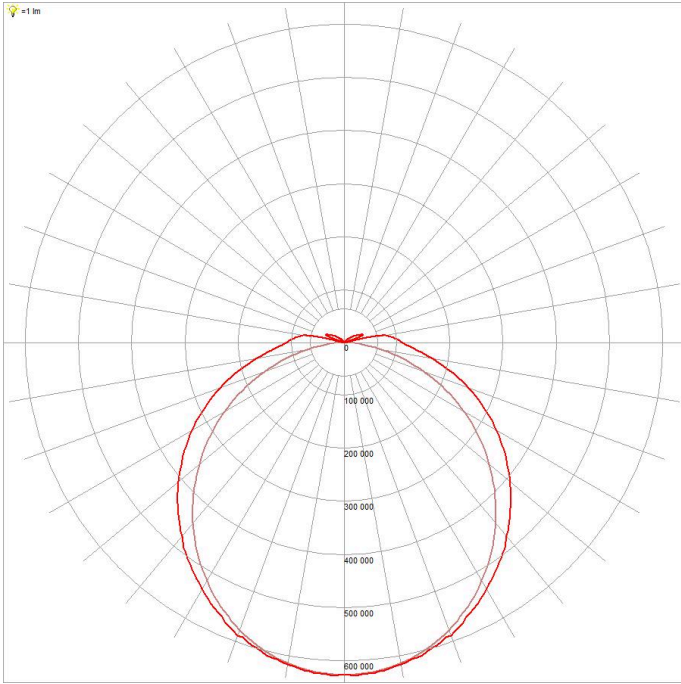


EV/UMBRA/PRO/IP65/600/3000K

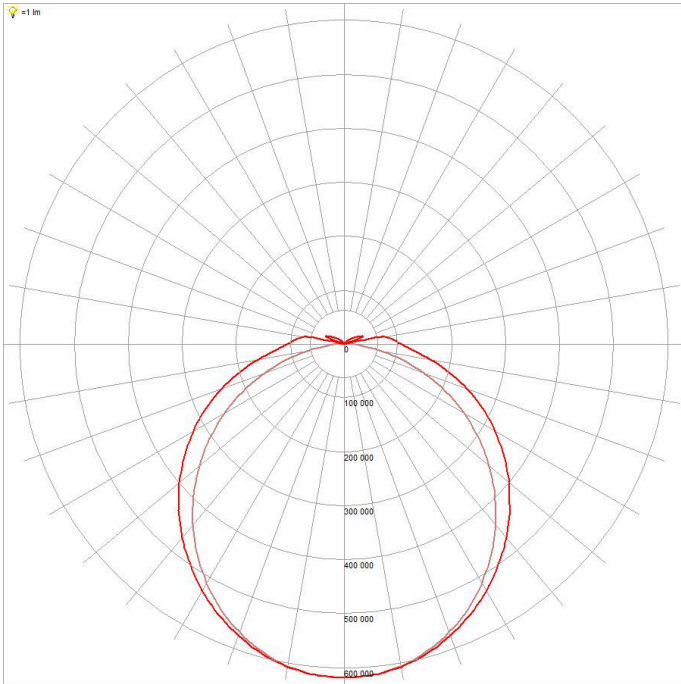

EV/UMBRA/PRO/IP65/600/4000K

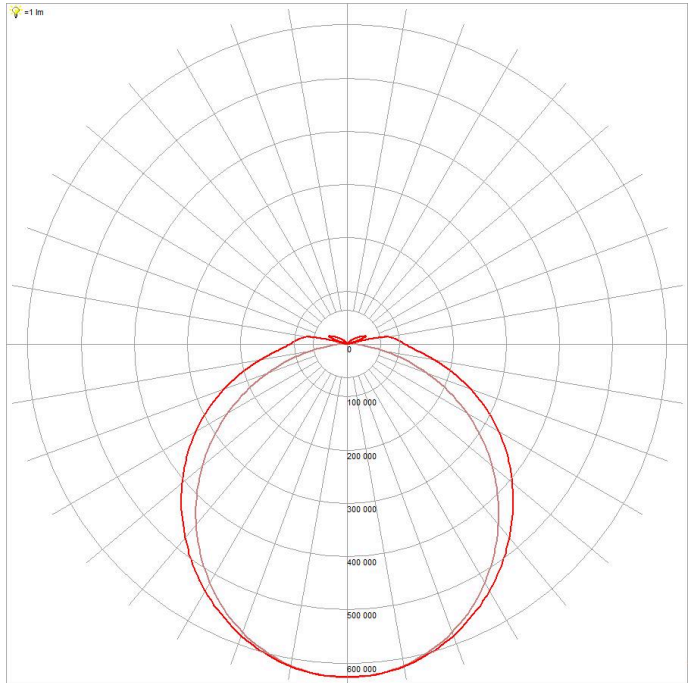

EV/UMBRA/PRO/IP65/600/5000K

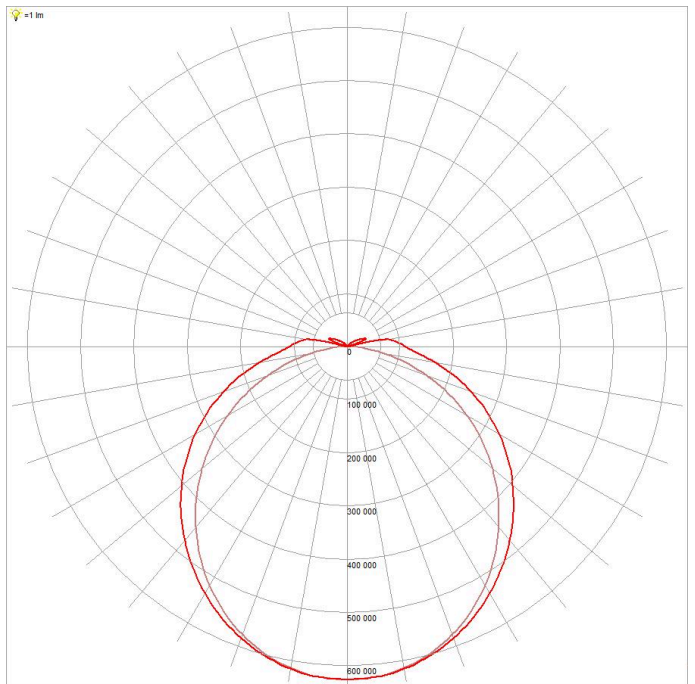


# UMBRA PROFESSIONAL IP65

Professional IP65 Weatherproof Batten, DALI Tuneable

White (DT8-Tc)

## FEATURES

- Smartest and most feature inclusive batten on the market. Provides long life and unrivaled control.
- Tuneable white (DT8-Tc) driver and LED allows tuning of the white colour to suit the application or time of day.
- Flicker-free dimming throughout the dimming range which allows light level adjustment to gain maximum power savings.
- IP65 weatherproof rating and IK08 impact rating.
- LED lifetime >120,000 hours (L70), 90,000 hours (L80) and 43,000 hours (L90).
- 12 years design life at max. ambient
- Full support for DALI and DALI-2 (IEC 62386) DT6 (LED) and DT8 (Tuneable white).
- Power monitoring (DT51) allows control systems to monitor and report active power and total power consumption.
- Built-in DALI-2 switch can be used for standalone control or unlimited control with DALI-2 compliant control systems.

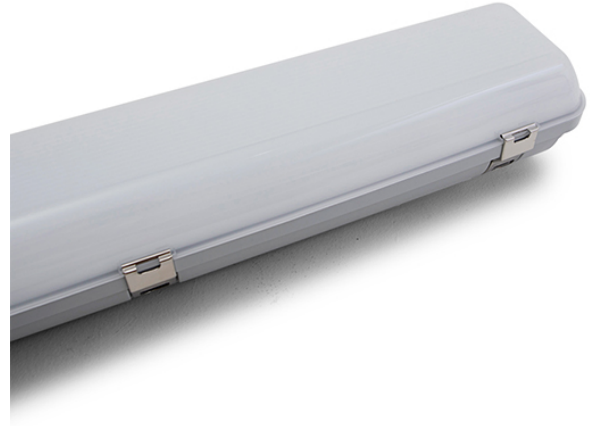

## ORDERING INFORMATION

<b>Order code</b>	12088
<b>Description</b>	UMBRA PRO 600mm Weatherproof LED batten
<b>Driver Type</b>	DALI DT8 Dimmable
DALI DT8 ~ Includes DALI-2 Driver with full support for DT6 and DT8-tc allowing flicker free dimming and colour control with compliant DALI-2 Application controllers.	
<b>Item Code</b>	EV-UMBRA-PRO-IP65-600

## MECHANICAL

<b>Body Material</b>	Polycarbonate
<b>Diffuser Material</b>	Polycarbonate
<b>Fitting Colour</b>	Grey
<b>IK Rating</b>	IK08
<b>Installation Type</b>	Surface mount
<b>IP Rating</b>	IP65

## ELECTRICAL

<b>Electrical Rating</b>	Class I
<b>Input Frequency</b>	50 Hz
<b>Input voltage</b>	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
<b>Maximum Wattage</b>	20 W
<b>Power Factor</b>	0.95
<b>Standby Power</b>	0.3 W
Standby power for non-maintained/switched maintained emergency devices is measured when the light is off and the charger is in standby mode. For maintained emergency devices, standby power is measured when the light is on and the charger is in standby mode. Typically, charging occurs for the first 16 hours after the device is powered or after a battery discharge.	
<b>Switch Type</b>	Inbuilt Mains Rated DALI Switch
A Terminal input has been provided to allow the wiring of a Main rated switch input. This input can be programmed to switch any controlled area when using a DALI-2 compliant control system. This input supports IEC62386-301 (momentary or rocker switches), IEC62386-302 (on /off switches) and IEC62386-303 (mains rated sensor inputs).	
<b>Working Temp Range</b>	0 to 40 °C



## LAMP

**Macadam Steps (SDCM)** 3-step MacAdam Ellipse

**CCT Configuration** TUNEABLE WHITE

Full support for DALI-2 DT8 has been provided which allows White colour control on a compliant DALI-2 control system. This function can be used to set a desired colour or to transition between colours depending on the time of day.

**CRI** >84

**Lamp/LED Current** 650 mA

**Lamp/LED voltage** 24 V

## LED LIFETIME

**LED Lifetime** >120000 hrs

This is the Reported LED Lifetime in Hours based on TM-21. Ektor does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below.

**Ambient Temp (°C)** 25 °C 40 °C

**L90B10** 43000 hrs 43000 hrs

**L80B10** 90000 hrs 90000 hrs

**L70B10** >120000 hrs >120000 hrs

This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the proceeding number gives the resultant lumen output at the end of it reported lifetime. L70, would mean 30% lumen depreciation which means 70% of its initial output and is tested accordingly to TM-21. The B part refers to failures, which can be define as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime, the system will reach the defined lumen depreciation and the average led failures is defined by the B rating. The B rating is defined in and tested to IEC62717.

**TM-21 Test Hours** 20000 hrs

## COLOUR TEMPERATURE

**CCT** 3000 to 6500

**CCT Colour** Tunable White

**Luminaire Lumens** >2000 lm

All photometric data has a tolerance of  $\pm 10\%$ . Luminaire lumens refers to the exit lumens or delivered lumens from the luminaire.

## DRIVER

**Dimmable** Yes

**Driver Included** Yes

**Integrated Driver** No

**Driver Type** DALI DT8 Dimmable

DALI DT8 ~ Includes DALI-2 Driver with full support for DT6 and DT8-tc allowing flicker free dimming and colour control with compliant DALI-2 Application controllers.

**Power Monitoring** DALI Device type 51 power monitoring

Inbuilt DALI-2 support for Device type 51 - Power monitoring for use with DALI-2 compliant control systems which allows the reporting of the products total power consumption for power aggregation and measurements.

## Wiring Type

Re-wireable terminal block (6 pin)

## COMPLIANCE

**Product Design Life** 12 years

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

**Standards** AS/NZS 60598.1  
AS/NZS 60598.2.1  
AS CISPR 15  
AS/NZS 61347.1  
AS/NZS 61347.2.13  
IEC 62386-102  
IEC 62386-103

## WARRANTY

**Commercial Use Warranty** 5Y return to base on General lighting components  
First 2Y includes an exclusive onsite warranty

**Warranty Operating Hours** 30000 hrs

This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

## DIMENSIONS


**Product Height** 93 mm

**Product Length** 650 mm


**Product Width** 130 mm

## PHOTOMETRICS


EV/UMBRA/PRO/IP65/600/6500K

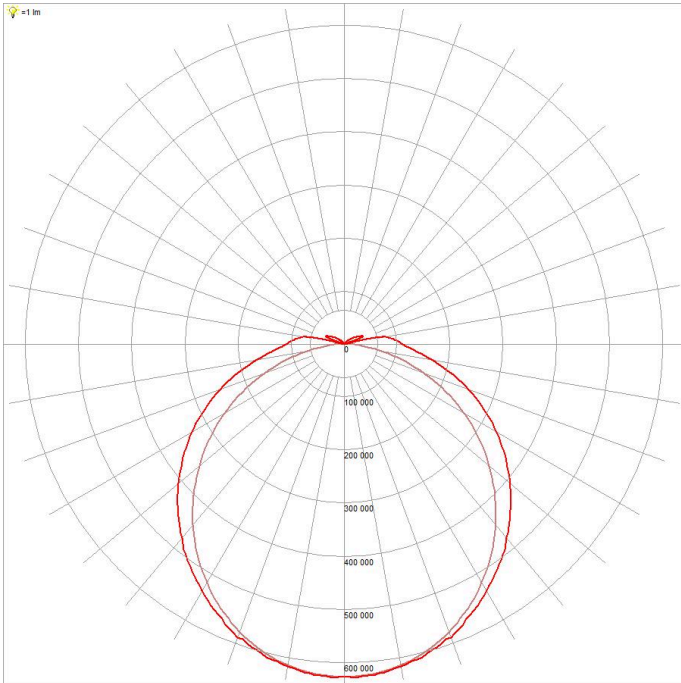


EV/UMBRA/PRO/IP65/600/4000K

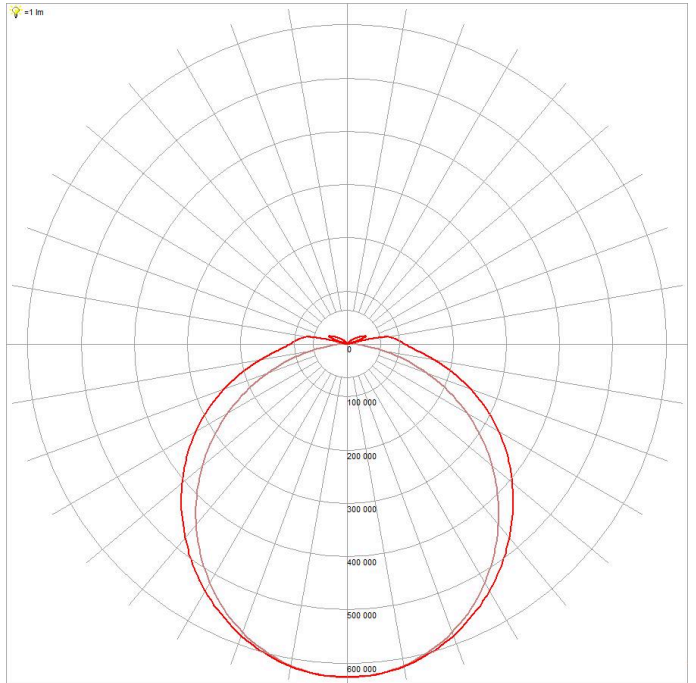

EV/UMBRA/PRO/IP65/600/3000K

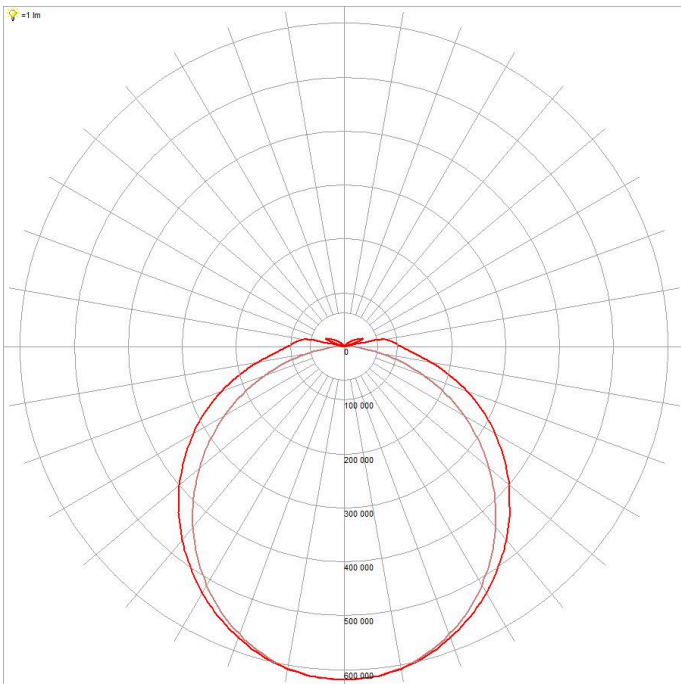

EV/UMBRA/PRO/IP65/600/5000K

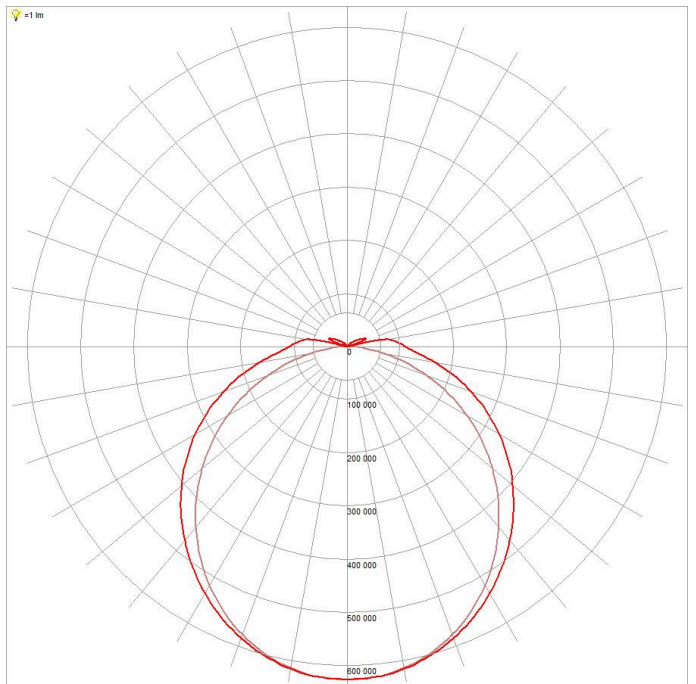

# UMBRA PROFESSIONAL IP65

Professional IP65 Weatherproof Batten, DALI Tuneable

White (DT8-Tc)

## FEATURES

- Smartest and most feature inclusive batten on the market. Provides long life and unrivaled control.
- Tuneable white (DT8-Tc) driver and LED allows tuning of the white colour to suit the application or time of day.
- Flicker-free dimming throughout the dimming range which allows light level adjustment to gain maximum power savings.
- IP65 weatherproof rating and IK08 impact rating.
- LED lifetime >120,000 hours (L70), 90,000 hours (L80) and 43,000 hours (L90).
- 12 years design life at max. ambient
- Microwave sensor suitable for DALI-2 (IEC 62386-303) allows unlimited control on DALI-2 compliant control systems.
- Full support for DALI and DALI-2 (IEC 62386) DT6 (LED) and DT8 (Tuneable white).
- Corridor mode support in standalone mode to intelligently save power by turning off when there is no occupancy.
- Power monitoring (DT51) allows control systems to monitor and report active power and total power consumption.
- Built-in DALI-2 switch can be used for standalone control or unlimited control with DALI-2 compliant control systems.
- Lynk wireless control allows for remote test and monitoring and provides full lighting control (AS/NZS 62386-104).



## ORDERING INFORMATION

<b>Order code</b>	12616
<b>Description</b>	Ektor Lynk Umbra 1200mm LED IP65 batten w/sensor - PRO w/wireless
<b>Driver Type</b>	Wireless (IEC62386-104) with DT8 Dimmable
Wireless ~ Includes Wireless Driver with full support for DT6 and DT8-tc allowing flicker free dimming and colour control with compliant IEC62386-104 Application controllers.	
<b>Item Code</b>	EV-UMBRA-PRO-IP65-1200-S-LK

## MECHANICAL

<b>Body Material</b>	Polycarbonate
<b>Diffuser Material</b>	Polycarbonate
<b>Fitting Colour</b>	Grey
<b>IK Rating</b>	IK08
<b>Installation Type</b>	Surface mount
<b>IP Rating</b>	IP65





## ELECTRICAL

<b>Electrical Rating</b>	Class I
<b>Input Frequency</b>	50 Hz
<b>Input voltage</b>	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
<b>Maximum Wattage</b>	33 W
<b>Power Factor</b>	0.95
<b>Standby Power</b>	0.3 W
Standby power for non-maintained/switched maintained emergency devices is measured when the light is off and the charger is in standby mode. For maintained emergency devices, standby power is measured when the light is on and the charger is in standby mode. Typically, charging occurs for the first 16 hours after the device is powered or after a battery discharge.	
<b>Switch Type</b>	Inbuilt Mains Rated DALI Switch
A Terminal input has been provided to allow the wiring of a Main rated switch input. This input can be programmed to switch any controlled area when using a DALI-2 compliant control system. This input supports IEC62386-301 (momentary or rocker switches), IEC62386-302 (on /off switches) and IEC62386-303 (mains rated sensor inputs).	
<b>Working Temp Range</b>	0 to 40 °C

## LAMP

<b>Macadam Steps (SDCM)</b>	3-step MacAdam Ellipse
<b>CCT Configuration</b>	TUNEABLE WHITE
Full support for DALI-2 DT8 has been provided which allows White colour control on a compliant DALI-2 control system. This function can be used to set a desired colour or to transition between colours depending on the time of day.	
<b>CRI</b>	>84
<b>Lamp/LED Current</b>	850 mA
<b>Lamp/LED voltage</b>	36 V

## LED LIFETIME

<b>LED Lifetime</b>	>120000 hrs	
This is the Reported LED Lifetime in Hours based on TM-21. Ektor does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below.		
<b>Ambient Temp (°C)</b>	25 °C	40 °C
<b>L90B10</b>	43000 hrs	43000 hrs
<b>L80B10</b>	90000 hrs	90000 hrs
<b>L70B10</b>	>120000 hrs	>120000 hrs
This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the proceeding number gives the resultant lumen output at the end of it reported lifetime. L70, would mean 30% lumen depreciation which means 70% of its initial output and is tested accordingly to TM-21. The B part refers to failures, which can be define as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime, the system will reach the defined lumen depreciation and the average led failures is defined by the B rating. The B rating is defined in and tested to IEC62717.		

<b>TM-21 Test Hours</b>	20000 hrs
-------------------------	-----------

## COLOUR TEMPERATURE

<b>CCT</b>	3000 to 6500
<b>CCT Colour</b>	Tunable White
<b>Luminaire Lumens</b>	>4100 lm
All photometric data has a tolerance of ±10%. Luminaire lumens refers to the exit lumens or delivered lumens from the luminaire.	

## DRIVER

<b>Dimmable</b>	Yes
<b>Driver Included</b>	Yes
<b>Integrated Driver</b>	No
<b>Driver Type</b>	Wireless (IEC62386-104) with DT8 Dimmable
Wireless ~ Includes Wireless Driver with full support for DT6 and DT8-tc allowing flicker free dimming and colour control with compliant IEC62386-104 Application controllers.	

<b>Power Monitoring</b>	DALI Device type 51 power monitoring
-------------------------	--------------------------------------

Inbuilt DALI-2 support for Device type 51 - Power monitoring for use with DALI-2 compliant control systems which allows the reporting of the products total power consumption for power aggregation and measurements.

<b>Wiring Type</b>	Re-wireable terminal block (6 pin)
--------------------	------------------------------------

## SENSOR (S SUFFIX)

<b>Adjustable Detection Area / Sensitivity</b>	Yes
<b>Adjustable Hold Time</b>	Yes
<b>Adjustable Standby Level</b>	Yes
<b>Adjustable Standby Period</b>	Yes
<b>Corridor Function</b>	Yes
<b>Dawn Reset</b>	No
<b>Detection Range</b>	10 m
<b>Dusk Mode</b>	No
<b>Lux Adjustment</b>	No
<b>Manual Override</b>	Yes
<b>Sensor Communication</b>	DALI 2
Inbuilt DALI-2 Sensor for use with DALI-2 Compliant control systems. Some features and functions are only available for use with DALI-2 Application controllers which support the features. This product also supports a standalone mode for limited use without a DALI-2 application controller.	
<b>Sensor Type</b>	Microwave
<b>Switched Output</b>	No
<b>Time Delay</b>	Via DALI

## COMPLIANCE

**Product Design Life** 12 years

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

**Standards**

- AS/NZS 60598.1
- AS/NZS 60598.2.1
- AS/NZS 61347.1
- AS/NZS 61347.2.13
- AS CISPR 15
- AS/NZS 4268
- IEC 62386-102
- IEC 62386-103
- IEC 62386-104

## WARRANTY

**Commercial Use Warranty** 5Y return to base on General lighting components  
First 2Y includes an exclusive onsite warranty

**Warranty Operating Hours** 30000 hrs

This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

## DIMENSIONS


**Product Height** 93 mm

**Product Length** 1260 mm


**Product Width** 130 mm

## PHOTOMETRICS


EV/UMBRA/PRO/IP65/1200/6500K

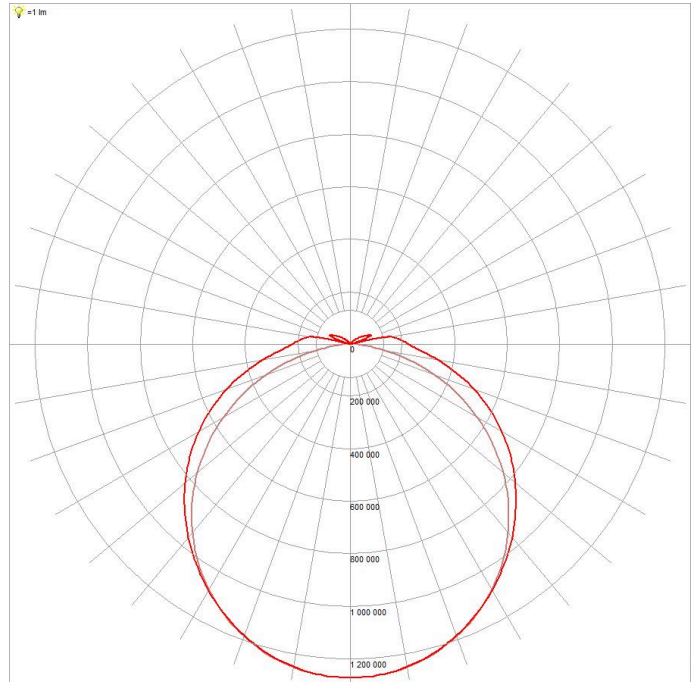


EV/UMBRA/PRO/IP65/1200/4000K

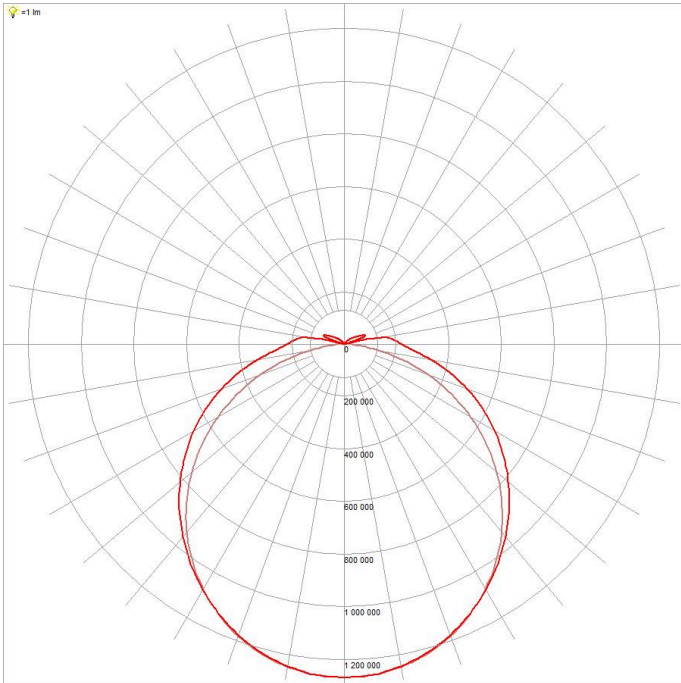

EV/UMBRA/PRO/IP65/1200/5000K

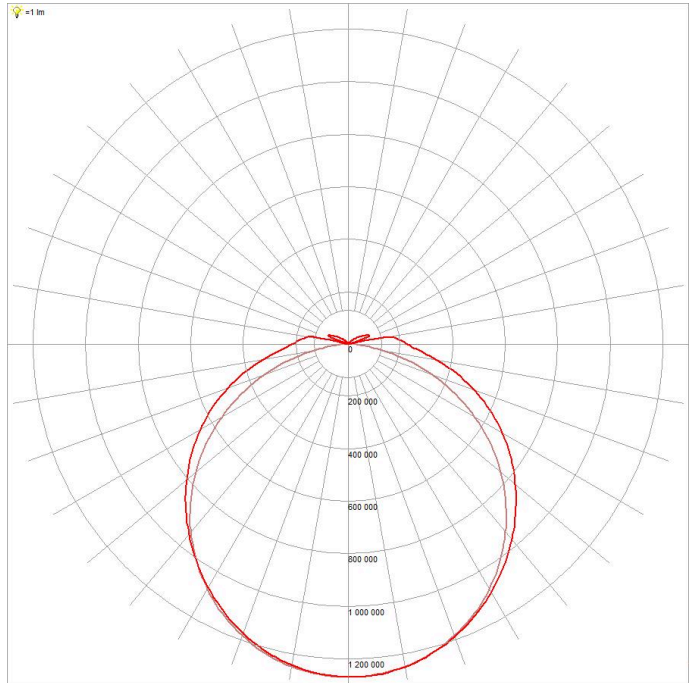

EV/UMBRA/PRO/IP65/1200/3000K

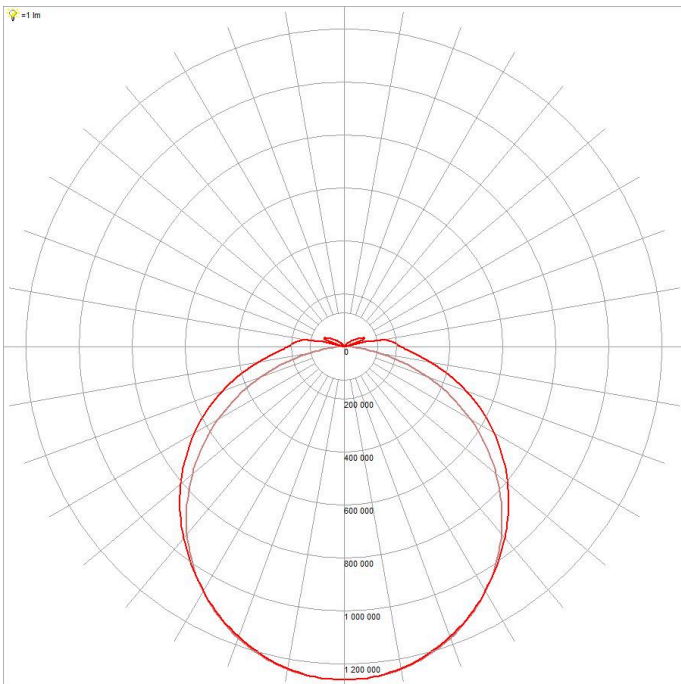

# UMBRA PROFESSIONAL IP65

Professional IP65 Weatherproof Batten, DALI Tuneable

White (DT8-Tc)

## FEATURES

- Smartest and most feature inclusive batten on the market. Provides long life and unrivaled control.
- Tuneable white (DT8-Tc) driver and LED allows tuning of the white colour to suit the application or time of day.
- Flicker-free dimming throughout the dimming range which allows light level adjustment to gain maximum power savings.
- IP65 weatherproof rating and IK08 impact rating.
- LED lifetime >120,000 hours (L70), 90,000 hours (L80) and 43,000 hours (L90).
- 12 years design life at max. ambient
- Microwave sensor suitable for DALI-2 (IEC 62386-303) allows unlimited control on DALI-2 compliant control systems.
- Full support for DALI and DALI-2 (IEC 62386) DT6 (LED) and DT8 (Tuneable white).
- Corridor mode support in standalone mode to intelligently save power by turning off when there is no occupancy.
- Power monitoring (DT51) allows control systems to monitor and report active power and total power consumption.
- Built-in DALI-2 switch can be used for standalone control or unlimited control with DALI-2 compliant control systems.



ORDERING INFORMATION	
<b>Order code</b>	12094
<b>Description</b>	UMBRA PRO 1200mm Weatherproof LED batten with sensor
<b>Driver Type</b>	DALI DT8 Dimmable
DALI DT8 ~ Includes DALI-2 Driver with full support for DT6 and DT8-tc allowing flicker free dimming and colour control with compliant DALI-2 Application controllers.	
<b>Item Code</b>	EV-UMBRA-PRO-IP65-1200-S

MECHANICAL	
<b>Body Material</b>	Polycarbonate
<b>Diffuser Material</b>	Polycarbonate
<b>Fitting Colour</b>	Grey
<b>IK Rating</b>	IK08
<b>Installation Type</b>	Surface mount
<b>IP Rating</b>	IP65



## ELECTRICAL

<b>Electrical Rating</b>	Class I
<b>Input Frequency</b>	50 Hz
<b>Input voltage</b>	230Vac

In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%

<b>Maximum Wattage</b>	33 W
<b>Power Factor</b>	0.95
<b>Standby Power</b>	0.3 W

Standby power for non-maintained/switched maintained emergency devices is measured when the light is off and the charger is in standby mode. For maintained emergency devices, standby power is measured when the light is on and the charger is in standby mode. Typically, charging occurs for the first 16 hours after the device is powered or after a battery discharge.

<b>Switch Type</b>	Inbuilt Mains Rated DALI Switch
--------------------	---------------------------------

A Terminal input has been provided to allow the wiring of a Main rated switch input. This input can be programmed to switch any controlled area when using a DALI-2 compliant control system. This input supports IEC62386-301 (momentary or rocker switches), IEC62386-302 (on /off switches) and IEC62386-303 (mains rated sensor inputs).

<b>Working Temp Range</b>	0 to 40 °C
---------------------------	------------

## LAMP

<b>Macadam Steps (SDCM)</b>	3-step MacAdam Ellipse
<b>CCT Configuration</b>	TUNEABLE WHITE

Full support for DALI-2 DT8 has been provided which allows White colour control on a compliant DALI-2 control system. This function can be used to set a desired colour or to transition between colours depending on the time of day.

<b>CRI</b>	>84
------------	-----

<b>Lamp/LED Current</b>	850 mA
-------------------------	--------

<b>Lamp/LED voltage</b>	36 V
-------------------------	------

## LED LIFETIME

<b>LED Lifetime</b>	>120000 hrs
---------------------	-------------

This is the Reported LED Lifetime in Hours based on TM-21. Ektor does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below.

<b>Ambient Temp (°C)</b>	25 °C	40 °C
<b>L90B10</b>	43000 hrs	43000 hrs
<b>L80B10</b>	90000 hrs	90000 hrs
<b>L70B10</b>	>120000 hrs	>120000 hrs

<b>TM-21 Test Hours</b>	20000 hrs
-------------------------	-----------

## COLOUR TEMPERATURE

<b>CCT</b>	3000 to 6500
<b>CCT Colour</b>	Tunable White
<b>Luminaire Lumens</b>	>4100 lm

All photometric data has a tolerance of ±10%. Luminaire lumens refers to the exit lumens or delivered lumens from the luminaire.

## DRIVER

<b>Dimmable</b>	Yes
<b>Driver Included</b>	Yes
<b>Integrated Driver</b>	No
<b>Driver Type</b>	DALI DT8 Dimmable

DALI DT8 ~ Includes DALI-2 Driver with full support for DT6 and DT8-tc allowing flicker free dimming and colour control with compliant DALI-2 Application controllers.

<b>Power Monitoring</b>	DALI Device type 51 power monitoring
-------------------------	--------------------------------------

Inbuilt DALI-2 support for Device type 51 - Power monitoring for use with DALI-2 compliant control systems which allows the reporting of the products total power consumption for power aggregation and measurements.

<b>Wiring Type</b>	Re-wireable terminal block (6 pin)
--------------------	------------------------------------

## SENSOR (S SUFFIX)

<b>Adjustable Detection Area / Sensitivity</b>	Yes
<b>Adjustable Hold Time</b>	Yes
<b>Adjustable Standby Level</b>	Yes
<b>Adjustable Standby Period</b>	Yes
<b>Corridor Function</b>	Yes
<b>Dawn Reset</b>	No
<b>Detection Range</b>	10 m
<b>Dusk Mode</b>	No
<b>Lux Adjustment</b>	No
<b>Manual Override</b>	Yes
<b>Sensor Communication</b>	DALI 2

Inbuilt DALI-2 Sensor for use with DALI-2 Compliant control systems. Some features and functions are only available for use with DALI-2 Application controllers which support the features. This product also supports a standalone mode for limited use without a DALI-2 application controller.

<b>Sensor Type</b>	Microwave
<b>Switched Output</b>	No
<b>Time Delay</b>	Via DALI

## COMPLIANCE

**Product Design Life** 12 years

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

**Standards**

- AS/NZS 60598.1
- AS/NZS 60598.2.1
- AS CISPR 15
- AS/NZS 61347.1
- AS/NZS 61347.2.13
- AS/NZS 4268
- IEC 62386-102
- IEC 62386-103

## WARRANTY

**Commercial Use Warranty** 5Y return to base on General lighting components  
First 2Y includes an exclusive onsite warranty

**Warranty Operating Hours** 30000 hrs

This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

## DIMENSIONS


**Product Height** 93 mm

**Product Length** 1260 mm



**Product Width** 130 mm

## PHOTOMETRICS

EV/UMBRA/PRO/IP65/1200/6500K

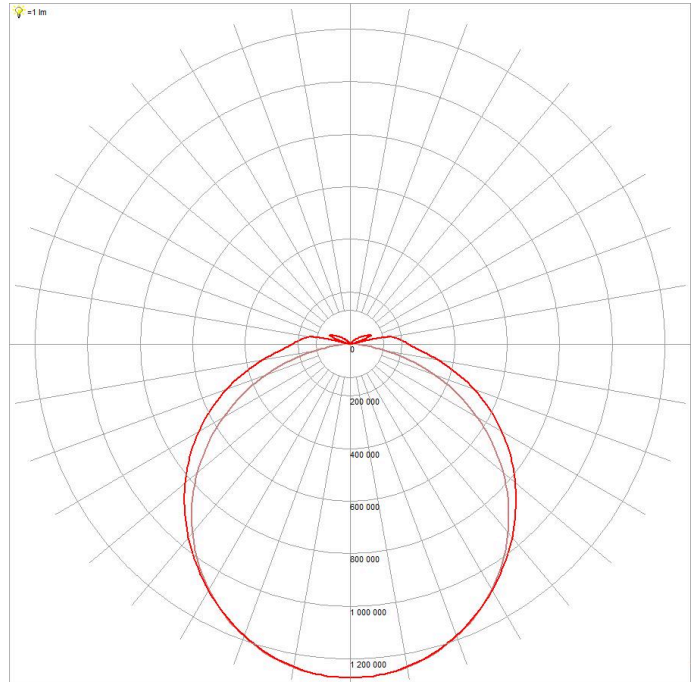


EV/UMBRA/PRO/IP65/1200/4000K

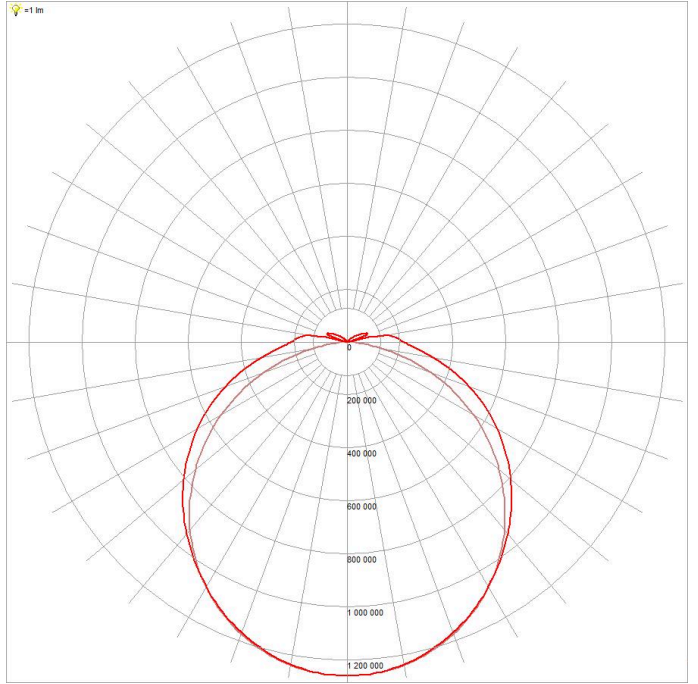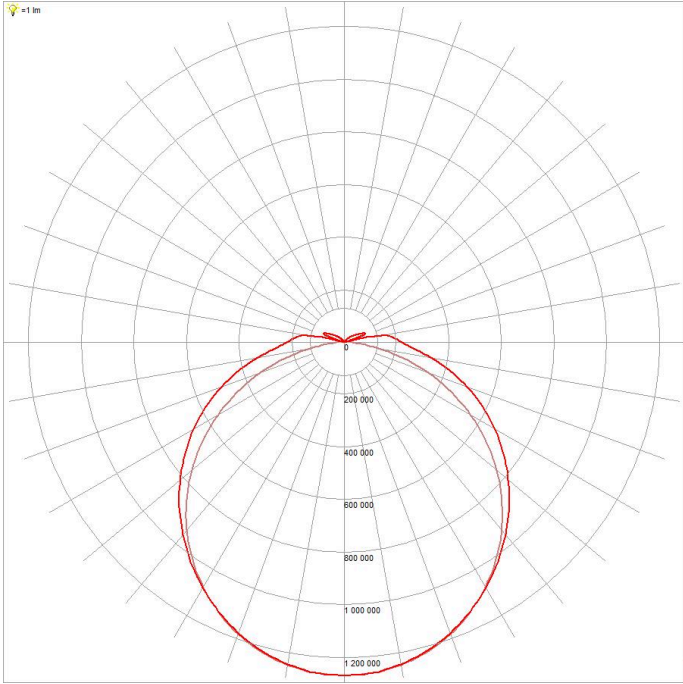

EV/UMBRA/PRO/IP65/1200/3000K

EV/UMBRA/PRO/IP65/1200/5000K

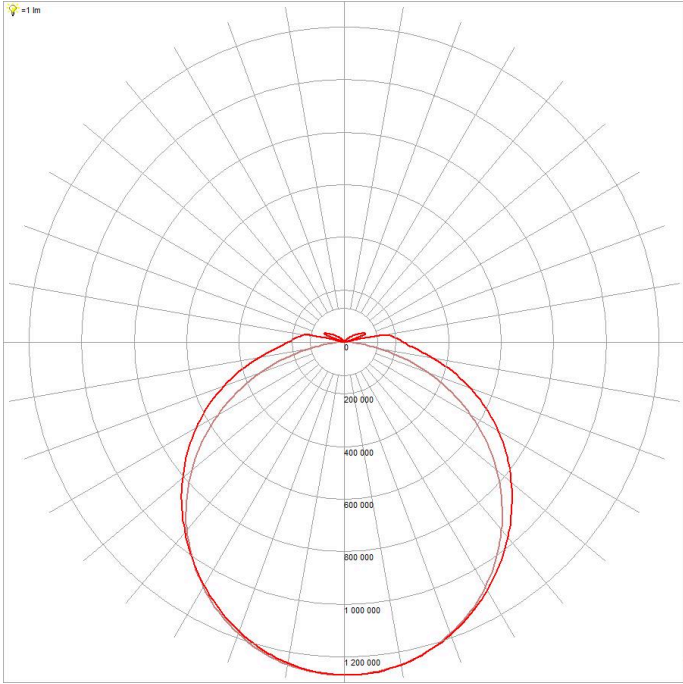



# UMBRA PROFESSIONAL IP65

Professional IP65 Weatherproof Batten, DALI Tuneable

White (DT8-Tc)

## FEATURES

- Smartest and most feature inclusive batten on the market. Provides long life and unrivaled control.
- Tuneable white (DT8-Tc) driver and LED allows tuning of the white colour to suit the application or time of day.
- Flicker-free dimming throughout the dimming range which allows light level adjustment to gain maximum power savings.
- IP65 weatherproof rating and IK08 impact rating.
- LED lifetime >120,000 hours (L70), 90,000 hours (L80) and 43,000 hours (L90).
- 12 years design life at max. ambient
- Full support for DALI and DALI-2 (IEC 62386) DT6 (LED) and DT8 (Tuneable white).
- Power monitoring (DT51) allows control systems to monitor and report active power and total power consumption.
- Built-in DALI-2 switch can be used for standalone control or unlimited control with DALI-2 compliant control systems.
- Lynk wireless control allows for remote test and monitoring and provides full lighting control (AS/NZS 62386-104).



ORDERING INFORMATION	
<b>Order code</b>	12614
<b>Description</b>	Ektor Lynk Umbra 1200mm LED IP65 batten - PRO w/wireless
<b>Driver Type</b>	Wireless (IEC62386-104) with DT8 Dimmable
Wireless ~ Includes Wireless Driver with full support for DT6 and DT8-tc allowing flicker free dimming and colour control with compliant IEC62386-104 Application controllers.	
<b>Item Code</b>	EV-UMBRA-PRO-IP65-1200-LK

MECHANICAL	
<b>Body Material</b>	Polycarbonate
<b>Diffuser Material</b>	Polycarbonate
<b>Fitting Colour</b>	Grey
<b>IK Rating</b>	IK08
<b>Installation Type</b>	Surface mount
<b>IP Rating</b>	IP65

ELECTRICAL	
<b>Electrical Rating</b>	Class I
<b>Input Frequency</b>	50 Hz
<b>Input voltage</b>	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
<b>Maximum Wattage</b>	33 W
<b>Power Factor</b>	0.95



**Standby Power** 0.3 W

Standby power for non-maintained/switched maintained emergency devices is measured when the light is off and the charger is in standby mode. For maintained emergency devices, standby power is measured when the light is on and the charger is in standby mode. Typically, charging occurs for the first 16 hours after the device is powered or after a battery discharge.

**Switch Type** Inbuilt Mains Rated DALI Switch

A Terminal input has been provided to allow the wiring of a Main rated switch input. This input can be programmed to switch any controlled area when using a DALI-2 compliant control system. This input supports IEC62386-301 (momentary or rocker switches), IEC62386-302 (on /off switches) and IEC62386-303 (mains rated sensor inputs).

**Working Temp Range** 0 to 40 °C

**LAMP**

**Macadam Steps (SDCM)** 3-step MacAdam Ellipse

**CCT Configuration** TUNEABLE WHITE

Full support for DALI-2 DT8 has been provided which allows White colour control on a compliant DALI-2 control system. This function can be used to set a desired colour or to transition between colours depending on the time of day.

**CRI** >84

**Lamp/LED Current** 850 mA

**Lamp/LED voltage** 36 V

**LED LIFETIME**

**LED Lifetime** >120000 hrs

This is the Reported LED Lifetime in Hours based on TM-21. Ektor does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below.

**Ambient Temp (°C)** 25 °C 40 °C

**L90B10** 43000 hrs 43000 hrs

**L80B10** 90000 hrs 90000 hrs

**L70B10** >120000 hrs >120000 hrs

This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the proceeding number gives the resultant lumen output at the end of it reported lifetime. L70, would mean 30% lumen depreciation which means 70% of its initial output and is tested accordingly to TM-21. The B part refers to failures, which can be define as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime, the system will reach the defined lumen depreciation and the average led failures is defined by the B rating. The B rating is defined in and tested to IEC62717.

**TM-21 Test Hours** 20000 hrs

**COLOUR TEMPERATURE**

**CCT** 3000 to 6500

**CCT Colour** Tunable White

**Luminaire Lumens** >4100 lm

All photometric data has a tolerance of ±10%. Luminaire lumens refers to the exit lumens or delivered lumens from the luminaire.

**DRIVER**

**Dimmable** Yes

**Driver Included** Yes

**Integrated Driver** No

**Driver Type** Wireless (IEC62386-104) with DT8 Dimmable

Wireless ~ Includes Wireless Driver with full support for DT6 and DT8-tc allowing flicker free dimming and colour control with compliant IEC62386-104 Application controllers.

**Power Monitoring** DALI Device type 51 power monitoring

Inbuilt DALI-2 support for Device type 51 - Power monitoring for use with DALI-2 compliant control systems which allows the reporting of the products total power consumption for power aggregation and measurements.

**Wiring Type** Re-wireable terminal block (6 pin)

**COMPLIANCE**

**Product Design Life** 12 years

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

- Standards**
- AS/NZS 60598.1
  - AS/NZS 60598.2.1
  - AS/NZS 61347.1
  - AS/NZS 61347.2.13
  - AS CISPR 15
  - AS/NZS 4268
  - IEC 62386-102
  - IEC 62386-103
  - IEC 62386-104

**WARRANTY**

**Commercial Use Warranty** 5Y return to base on General lighting components  
First 2Y includes an exclusive onsite warranty

**Warranty Operating Hours** 30000 hrs


This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

**DIMENSIONS**


Product Height	93 mm
Product Length	1260 mm
Product Width	130 mm

**PHOTOMETRICS**


EV/UMBRA/PRO/IP65/1200/6500K

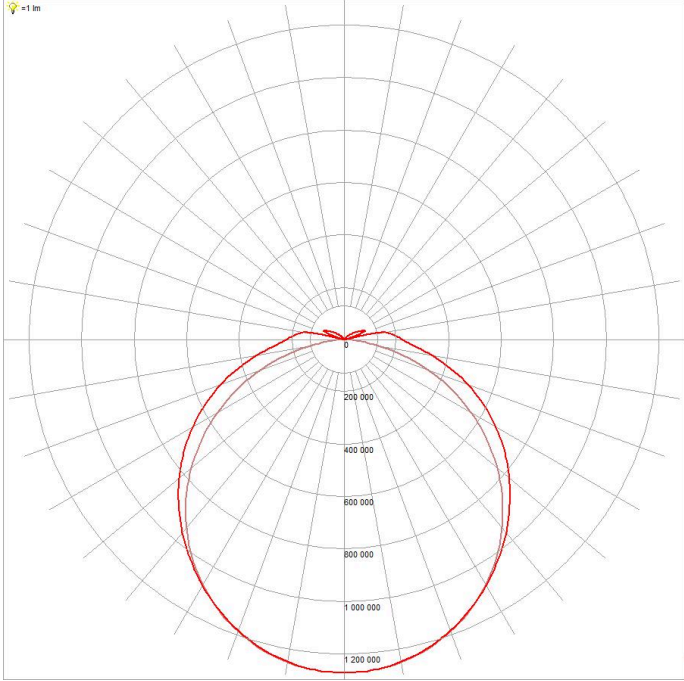


EV/UMBRA/PRO/IP65/1200/4000K

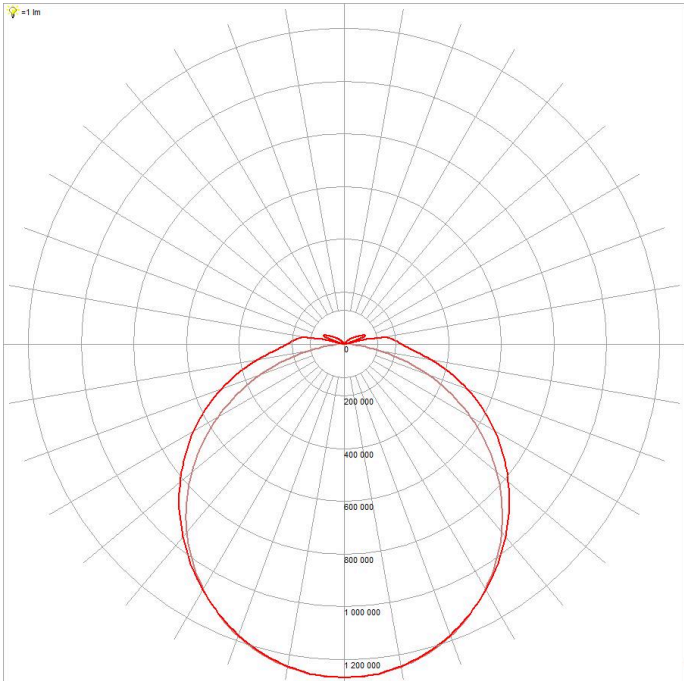

EV/UMBRA/PRO/IP65/1200/3000K

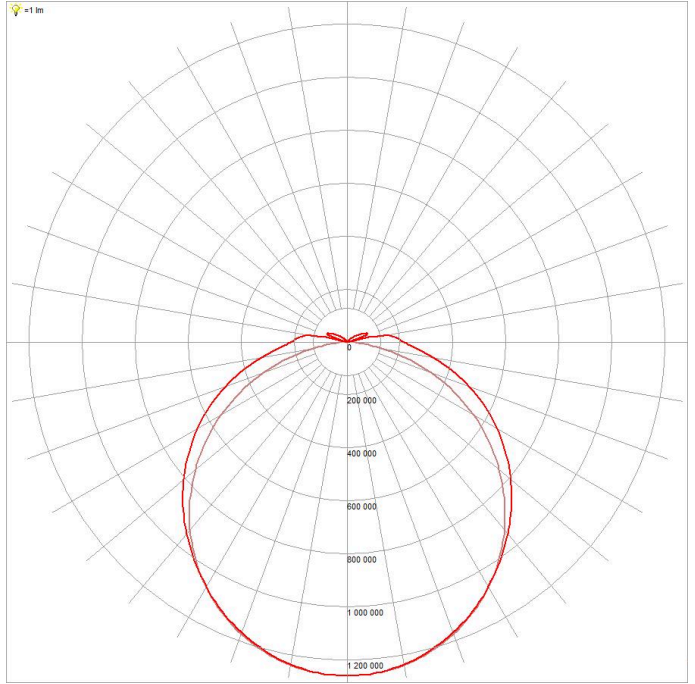

EV/UMBRA/PRO/IP65/1200/5000K

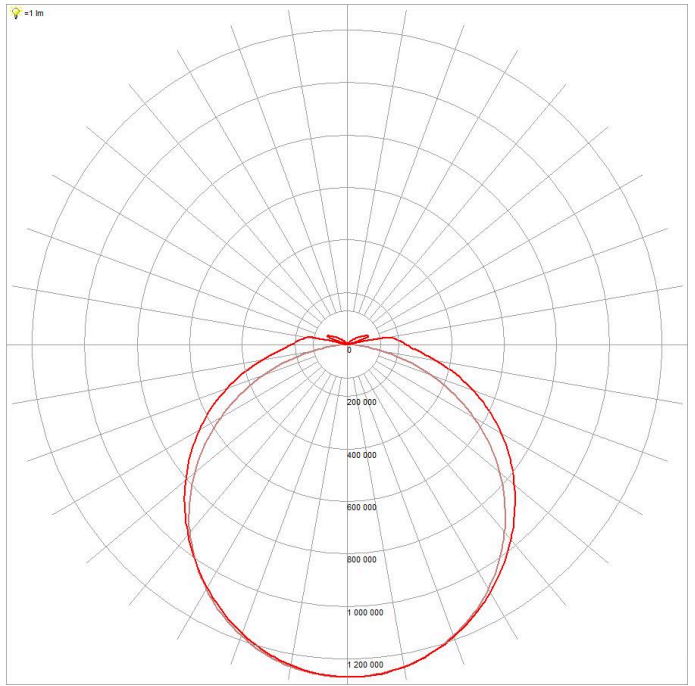

# UMBRA PROFESSIONAL IP65

Professional IP65 Weatherproof Batten, DALI Tuneable

White (DT8-Tc)

## FEATURES

- Smartest and most feature inclusive batten on the market. Provides long life and unrivaled control.
- Tuneable white (DT8-Tc) driver and LED allows tuning of the white colour to suit the application or time of day.
- Flicker-free dimming throughout the dimming range which allows light level adjustment to gain maximum power savings.
- IP65 weatherproof rating and IK08 impact rating.
- LED lifetime >120,000 hours (L70), 90,000 hours (L80) and 43,000 hours (L90).
- 12 years design life at max. ambient
- Full support for DALI and DALI-2 (IEC 62386) DT6 (LED) and DT8 (Tuneable white).
- Power monitoring (DT51) allows control systems to monitor and report active power and total power consumption.
- Built-in DALI-2 switch can be used for standalone control or unlimited control with DALI-2 compliant control systems.



ORDERING INFORMATION	
<b>Order code</b>	12092
<b>Description</b>	UMBRA PRO 1200mm Weatherproof LED batten
<b>Driver Type</b>	DALI DT8 Dimmable
	DALI DT8 ~ Includes DALI-2 Driver with full support for DT6 and DT8-tc allowing flicker free dimming and colour control with compliant DALI-2 Application controllers.
<b>Item Code</b>	EV-UMBRA-PRO-IP65-1200

MECHANICAL	
<b>Body Material</b>	Polycarbonate
<b>Diffuser Material</b>	Polycarbonate
<b>Fitting Colour</b>	Grey
<b>IK Rating</b>	IK08
<b>Installation Type</b>	Surface mount
<b>IP Rating</b>	IP65

ELECTRICAL	
<b>Electrical Rating</b>	Class I
<b>Input Frequency</b>	50 Hz
<b>Input voltage</b>	230Vac
	In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%
<b>Maximum Wattage</b>	33 W
<b>Power Factor</b>	0.95
<b>Standby Power</b>	0.3 W
	Standby power for non-maintained/switched maintained emergency devices is measured when the light is off and the charger is in standby mode. For maintained emergency devices, standby power is measured when the light is on and the charger is in standby mode. Typically, charging occurs for the first 16 hours after the device is powered or after a battery discharge.
<b>Switch Type</b>	Inbuilt Mains Rated DALI Switch
	A Terminal input has been provided to allow the wiring of a Main rated switch input. This input can be programmed to switch any controlled area when using a DALI-2 compliant control system. This input supports IEC62386-301 (momentary or rocker switches), IEC62386-302 (on /off switches) and IEC62386-303 (mains rated sensor inputs).
<b>Working Temp Range</b>	0 to 40 °C



## LAMP

**Macadam Steps (SDCM)** 3-step MacAdam Ellipse

**CCT Configuration** TUNEABLE WHITE

Full support for DALI-2 DT8 has been provided which allows White colour control on a compliant DALI-2 control system. This function can be used to set a desired colour or to transition between colours depending on the time of day.

**CRI** >84

**Lamp/LED Current** 850 mA

**Lamp/LED voltage** 36 V

## LED LIFETIME

**LED Lifetime** >120000 hrs

This is the Reported LED Lifetime in Hours based on TM-21. Ektor does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below.

**Ambient Temp (°C)** 25 °C 40 °C

**L90B10** 43000 hrs 43000 hrs

**L80B10** 90000 hrs 90000 hrs

**L70B10** >120000 hrs >120000 hrs

This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the preceding number gives the resultant lumen output at the end of its reported lifetime. L70, would mean 30% lumen depreciation which means 70% of its initial output and is tested accordingly to TM-21. The B part refers to failures, which can be defined as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime, the system will reach the defined lumen depreciation and the average led failures is defined by the B rating. The B rating is defined in and tested to IEC62717.

**TM-21 Test Hours** 20000 hrs

## COLOUR TEMPERATURE

**CCT** 3000 to 6500

**CCT Colour** Tunable White

**Luminaire Lumens** >4100 lm

All photometric data has a tolerance of ±10%. Luminaire lumens refers to the exit lumens or delivered lumens from the luminaire.

## DRIVER

**Dimmable** Yes

**Driver Included** Yes

**Integrated Driver** No

**Driver Type** DALI DT8 Dimmable

DALI DT8 ~ Includes DALI-2 Driver with full support for DT6 and DT8-tc allowing flicker free dimming and colour control with compliant DALI-2 Application controllers.

**Power Monitoring** DALI Device type 51 power monitoring

Inbuilt DALI-2 support for Device type 51 - Power monitoring for use with DALI-2 compliant control systems which allows the reporting of the products total power consumption for power aggregation and measurements.

## Wiring Type

Re-wireable terminal block (6 pin)

## COMPLIANCE

**Product Design Life** 12 years

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

**Standards** AS/NZS 60598.1  
AS/NZS 60598.2.1  
AS CISPR 15  
AS/NZS 61347.1  
AS/NZS 61347.2.13  
IEC 62386-102  
IEC 62386-103

## WARRANTY

**Commercial Use Warranty** 5Y return to base on General lighting components  
First 2Y includes an exclusive onsite warranty

**Warranty Operating Hours** 30000 hrs

This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

## DIMENSIONS


**Product Height** 93 mm

**Product Length** 1260 mm


**Product Width** 130 mm

## PHOTOMETRICS


EV/UMBRA/PRO/IP65/1200/6500K

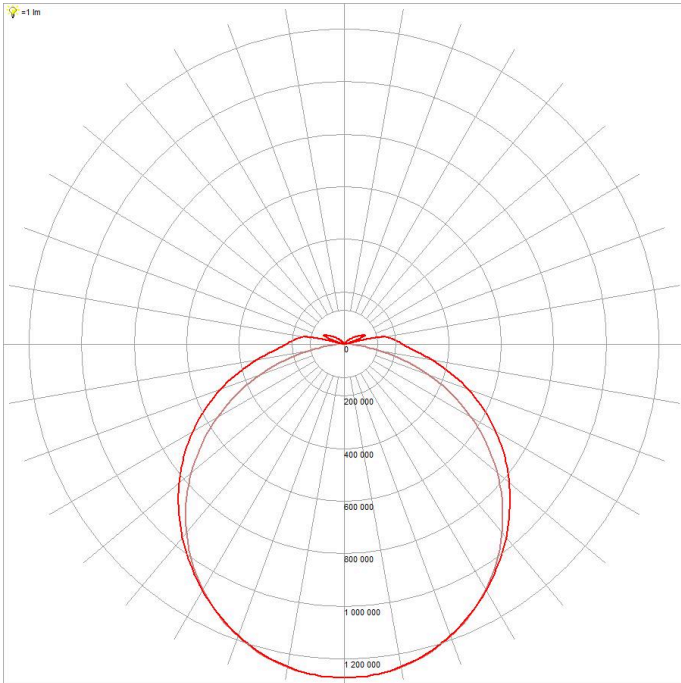

EV/UMBRA/PRO/IP65/1200/3000K

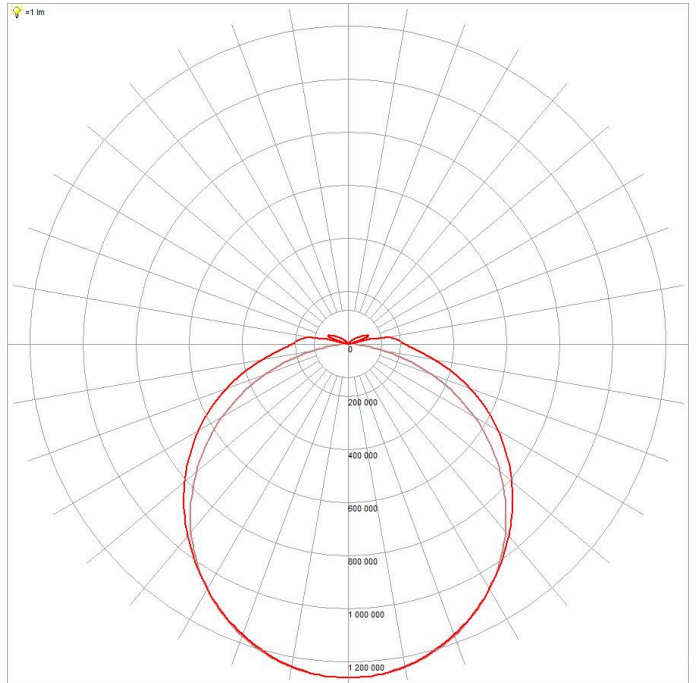

EV/UMBRA/PRO/IP65/1200/4000K

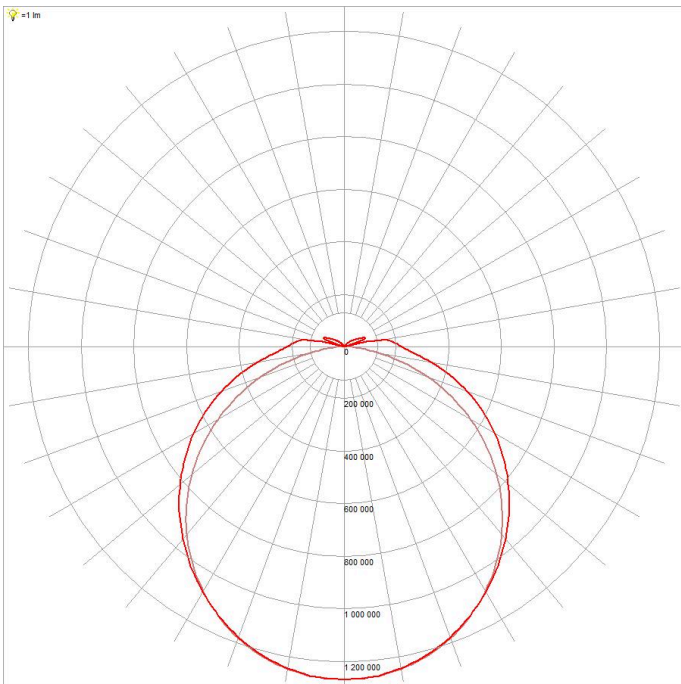

EV/UMBRA/PRO/IP65/1200/5000K

