




## 4X7 Series

### Product Specifications

<b>SKU</b>	VBLDL-447-1-CCT
<b>Luminaire efficacy</b>	94 lm/W
<b>Product Series</b>	VBLDL-4X7-SERIES
<b>EAN</b>	9340994409399
<b>Wattage</b>	25 W
<b>Lumen output</b>	2340 lm
<b>IP rating</b>	54
<b>CRI</b>	80
<b>Beam Angle</b>	90 Degrees
<b>Trim colour</b>	White
<b>Cut out</b>	200 mm
<b>Diameter</b>	228 mm
<b>Height</b>	98 mm
<b>Lifespan</b>	50000 Hours
<b>Warranty</b>	3 Years
<b>Dimmable</b>	Dimmable
<b>Cert of Electr. safety</b>	CE-ROHS, SAA APPROVED
<b>Lamp Type</b>	LED
<b>Material</b>	Die-cast Aluminium
<b>LED source</b>	EPISTAR
<b>Input voltage</b>	200 - 240V AC
<b>Mounting type</b>	Recessed
<b>Working temperature</b>	-20°C ~ 45°C



### Dimensional Drawings

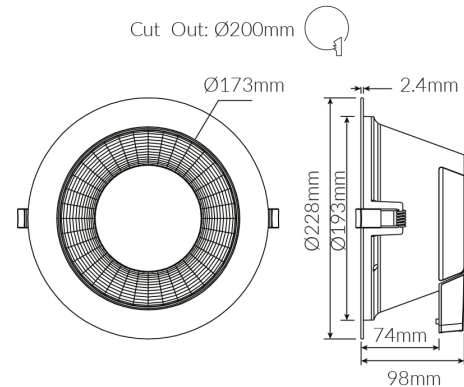

Photometric information available upon request.



## 4X7 Series

### Product Specifications

<b>SKU</b>	VBLDL-437-1-CCT
<b>Luminaire efficacy</b>	80 lm/W
<b>Product Series</b>	VBLDL-4X7-SERIES
<b>EAN</b>	9340994409382
<b>Wattage</b>	18 W
<b>Lumen output</b>	1440 lm
<b>IP rating</b>	54
<b>CRI</b>	80
<b>Beam Angle</b>	90 Degrees
<b>Trim colour</b>	White
<b>Cut out</b>	150 mm
<b>Diameter</b>	172 mm
<b>Height</b>	95 mm
<b>Lifespan</b>	50000 Hours
<b>Warranty</b>	3 Years
<b>Dimmable</b>	Dimmable
<b>Cert of Eletr. safety</b>	CE-ROHS, SAA APPROVED
<b>Lamp Type</b>	LED
<b>Material</b>	Die-cast Aluminium
<b>LED source</b>	EPISTAR
<b>Input voltage</b>	200 - 240V AC
<b>Mounting type</b>	Recessed
<b>Wiring method</b>	Flex & Plug
<b>Working temperature</b>	-20°C ~ 45°C



### Dimensional Drawings

