


## AT9884

Wide body Wireguard Battens 600mm

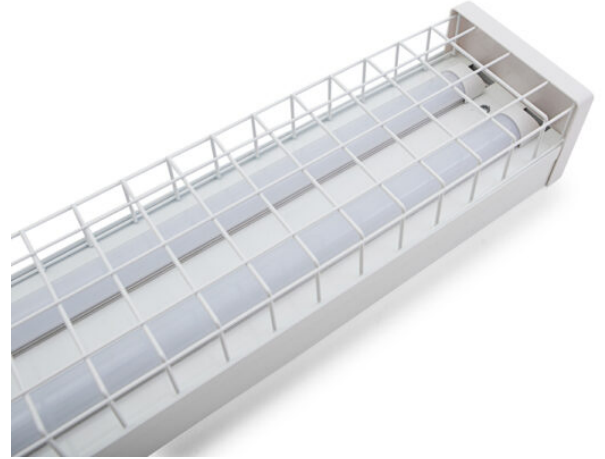

### Mechanical

<b>Adjustability</b>	Fixed
<b>Body Material</b>	Steel
<b>Diffuser Material</b>	Polycarbonate
<b>Product Finish</b>	Powdercoated
<b>Fitting Colour</b>	White
<b>Installation Type</b>	Surface mount
<b>IP Rating</b>	IP20

### Electrical

<b>Electrical Rating (Class)</b>	1
<b>Input Frequency (Hz)</b>	50
<b>Input voltage</b>	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
<b>Maximum Wattage (w)</b>	
<b>AT9884/CW</b>	24
<b>AT9884/CW</b>	21
<b>Switch Type</b>	Inline
<b>Working Temp Range (C)</b>	-20 to 40

### Lamp

<b>Beam Angle (Deg)</b>	120
<b>CCT Configuration</b>	Single
<b>CRI</b>	>80

### Colour temperature

<b>CCT (K)</b>	4000
<b>CCT Colour</b>	Cool White

### Driver

<b>Dimmable</b>	No
<b>Driver Included</b>	Yes
<b>Integrated Driver</b>	No
<b>Driver Mode</b>	Constant Current
<b>Driver Type</b>	Fixed output
<b>Wiring Type</b>	Re-wireable terminal block (3 pin)

### Energy Savings Scheme

<b>Ipart Approval</b>	Yes
<b>REES Approval</b>	Yes
<b>VEU Approval</b>	Yes

## Compliance

<b>Standards</b>	AS/NZS 60598.1 AS/NZS 60598.2.1 AS CISPR 15
------------------	---

## Warranty

<b>Commercial Use Warranty</b>	3 (Yr) RTB
<b>Domestic Use Warranty</b>	3 (Yr) RTB

## Dimensions


<b>Product Height (mm)</b>	91
<b>Product Length (mm)</b>	622
<b>Product Width (mm)</b>	124

## Ordering Information

Order code	Item Code	Description
11819	<b>AT9884/CW</b>	2ft 24w 4000k LED Wide Body Wire Guard Batten Cool White
13954	<b>AT9884/CW</b>	21W Twin 600mm Wide Body Wire Guard LED Batten

## Line Drawings

### AT9884/CW

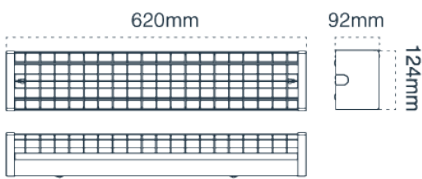

## Photometrics

### AT9884/CW

