

NO UV/IR

BLOCK-6 LED Wall Light

Description

The BLOCK-6, a surface mounted LED wall light that illuminates both upward and downward to create that subtle welcoming effect. The BLOCK is also rated at IP65, giving you flexibility in indoor and covered outdoor applications.

3yr


arrant

Rati,

65

LED


BLOCK-6 is constructed from die-cast aluminium and includes a tempered glass lens. Behind this lens sits energy saving (2x) 3W SMD LED chips, that will provide you with a total of 550 lumens of (upward/downward) light output. The BLOCK-6 also comes complete with our Three Year Replacement Warranty for peace of mind.

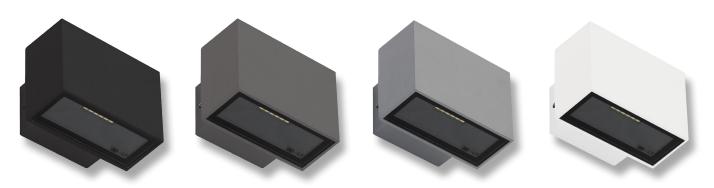

Specification Features

Input Voltage:	220V-265V
Power (W):	2 x 3W (6W Total)
IP rating (IP):	IP65
Lumens (lm):	Warm White 3000K - 500lm White 5000K - 550lm
LED type:	SMD
CCT:	3000K - 5000K
CRI:	≥80
Beam angle (°):	45°
Dimmable:	No
Lifespan (hrs):	50,000hrs

Diagrams / Additional



Item No.	Variant	Colour
BLOCK-6-BLK	19544	3000K
	19545	5000K
	19546	3000K
BLOCK-6-DGR	19547	5000K
	19570	3000K
BLOCK-6-SLR	19571	5000K
	19572	3000K
BLOCK-6-WHT	19573	5000K

Domus Lighting 29-31 Richland Street. Kingsgrove NSW 2208 | Phone: (02) 9554 9600 | Fax: (02) 9554 9433 | email: enquiries@domuslighting.com Specification subject to change without prior notice.



BLOCK-12 LED Wall Light



Description

The BLOCK-12, a surface mounted 12 LED wall light that illuminates both upward and downward to create that subtle welcoming effect. The BLOCK is also rated at IP65, giving you flexibility in indoor and covered outdoor applications.

BLOCK-12 is constructed from die-cast aluminium and includes a tempered glass lens. Behind these lens sits energy saving (2x) 6W SMD LED chips, that will provide you with a total of 1100 lumens (upward/downward) light output. The BLOCK-12 also comes complete with our Three Year Replacement Warranty for peace of mind.



Specification Features

Input Voltage:	240V
Power (W):	2x6W (12W Total)
IP rating (IP):	IP65
Lumens (lm):	Warm White 3000K - 950lm White 5000K - 1100lm
LED type:	SMD
CCT:	3000К - 5000К
CRI:	≥80
Beam angle (°):	45°
Dimmable:	No
Lifespan (hrs):	50,000hrs

Diagrams / Additional

