


# DALI CONSTANT CURRENT DRIVER

DALI controlled Constant Current Led Driver IP20

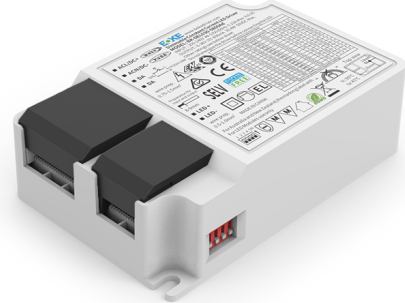

## ORDERING INFORMATION

<b>Order code</b>	12250
<b>Description</b>	30W Dimmable Constant Current DALI-2 LED Driver 6-42V 250-800mA selectable
<b>Driver Power</b>	30 W
<b>Driver Type</b>	DALI Dimmable
<b>Item Code</b>	EV-DRIVER-30A-DA

## MECHANICAL

<b>Body Material</b>	Polycarbonate
<b>IP Rating</b>	IP20

## ELECTRICAL

<b>Electrical Rating</b>	Class II
<b>Input Frequency</b>	50 Hz
<b>Input voltage</b>	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
<b>Power Factor</b>	0.9
<b>Switch Type</b>	Inline
<b>Working Temp Range</b>	-20 to 45 °C

## DRIVER

<b>Dimmable</b>	Yes
<b>Driver Mode</b>	Constant Current
<b>Driver Type</b>	DALI Dimmable
<b>Wiring Type</b>	Re-wireable terminal block (4 pin)
<b>Driver Power</b>	30 W
<b>Driver Current</b>	250-800 mA
<b>Output Voltage Range</b>	6-42 V

## COMPLIANCE

<b>Standards</b>	AS/NZS 61347.1 AS 61347.2.13 EN IEC 55015 EN IEC 61000.3.2 EN 61000.3.3
------------------	---

## WARRANTY

<b>Operational Lifetime</b>	100000 hrs
-----------------------------	------------




#### DIMENSIONS

Product Height	30 mm
Product Length	103 mm
Product Width	68 mm

# DALI CONSTANT CURRENT DRIVER

DALI controlled Constant Current Led Driver IP20

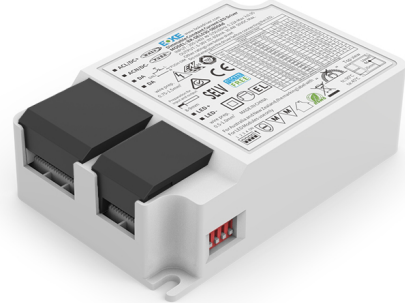

## ORDERING INFORMATION

<b>Order code</b>	12247
<b>Description</b>	42W Dimmable Constant Current DALI-2 LED Driver 6-42V 450-1100mA selectable
<b>Driver Power</b>	42 W
<b>Driver Type</b>	DALI Dimmable
<b>Item Code</b>	EV-DRIVER-42A-DA

## MECHANICAL

<b>Body Material</b>	Polycarbonate
<b>IP Rating</b>	IP20

## ELECTRICAL

<b>Electrical Rating</b>	Class II
<b>Input Frequency</b>	50 Hz
<b>Input voltage</b>	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
<b>Working Temp Range</b>	-20 to 45 °C

## DRIVER

<b>Dimmable</b>	Yes
<b>Driver Mode</b>	Constant Current
<b>Driver Type</b>	DALI Dimmable
<b>Wiring Type</b>	Re-wireable terminal block (4 pin)
<b>Driver Power</b>	42 W
<b>Driver Current</b>	450-1100 mA
<b>Output Voltage Range</b>	6-42 V

## COMPLIANCE

<b>Standards</b>	AS/NZS 61347.1 AS 61347.2.13 EN IEC 55015 EN IEC 61000.3.2 EN 61000.3.3
------------------	---

## WARRANTY

<b>Operational Lifetime</b>	100000 hrs
-----------------------------	------------



#### DIMENSIONS

Product Height	30 mm
Product Length	103 mm
Product Width	68 mm