


# CURVE ADV

Curve Advanced Troffer, CRI >80

## FEATURES

- Low-glare curved reflector and even light distribution
- External LED driver for easy maintenance and installation
- Supplied with a choice of different softwiring and hardwiring options
- High efficiency design with >150Lm/W output
- Excellent L90B10 lifetime for energy efficient lighting designs
- Flicker free DALI-2 certified LED driver giving excellent compatibility

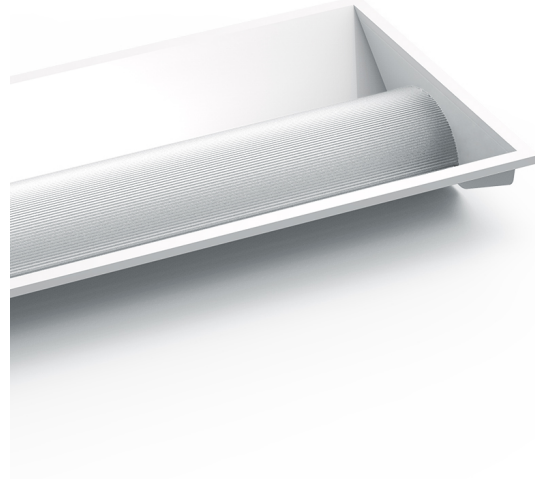

| ORDERING INFORMATION   |  |
|--|--|
| Order code   | 13532  |
| Description  | 9W Curve Adv Troffer<br>300x600mm - 4000K - DALI |
| Driver Type  | DALI DT6 LED Driver                              |
| DALI DT6 ~ Includes DALI-2 Driver with full support for DT6 allowing flicker free dimming with compliant DALI-2 Application controllers. |  |
| Item Code  | EV-CURVE-ADV-306-9W-DA                           |

| MECHANICAL        |                   |
|-------------------|-------------------|
| Body Material     | Cold rolled steel |
| Diffuser Material | PMMA              |
| Product Finish    | Powder coated     |
| Fitting Colour    | White             |
| Installation Type | Recessed          |
| IP Rating         | IP40              |

| ELECTRICAL  |          |
|---|----------|
| Electrical Rating   | Class II |
| Input Current   | 0.05 A   |
| Input Frequency   | 50 Hz    |
| Input voltage   | 230Vac   |
| In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6% |          |
| Maximum Wattage   | 9 W      |
| Power Factor  | 0.95     |
| Switch Type   | Via DALI |

|                    |            |
|--------------------|------------|
| Working Temp Range | 0 to 40 °C |
|--------------------|------------|

| LAMP  |                        |
|---|------------------------|
| Macadam Steps (SDCM)  | 4-step MacAdam Ellipse |
| CCT Configuration   | Single                 |
| CRI   | >80                    |
| Lamp/LED Current  | 250 mA                 |
| Lamp/LED voltage  | 36 V                   |
| System Efficiency   | 144 lm/W               |
| UGR   | <19                    |
| UGR (Unified Glare Rating) is reported as per AS/NZS 1680.2 using the following design parameters; room reflectance 0.7/0.5/0.2 (C/W/F), ceiling height 2.7m, LLF=0.8 (Nominal) from the corrected UGR table. |                        |

| LED LIFETIME  |             |             |
|---|-------------|-------------|
| LED Lifetime  | >54,000 hrs |             |
| This is the Reported LED Lifetime in Hours based on TM-21. Ektor does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below. |             |             |
| Ambient Temp (°C)   | 25 °C       | 40 °C       |
| L90B10  | 53,000 hrs  | 53,000 hrs  |
| L80B10  | >54,000 hrs | >54,000 hrs |
| L70B10  | >54,000 hrs | >54,000 hrs |

This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the proceeding number gives the resultant lumen output at the end of it reported lifetime. L70, would mean 30% lumen depreciation which means 70% of its initial output and is tested accordingly to TM-21. The B part refers to failures, which can be define as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime, the system will reach the defined lumen depreciation and the average led

failures is defined by the B rating. The B rating is defined in and tested to IEC62717.

**TM-21 Test Hours** 9000 hrs

### COLOUR TEMPERATURE

**CCT** 4000 K

**Luminaire Lumens** 1300 lm

All photometric data has a tolerance of  $\pm 10\%$ . Luminaire lumens refers to the exit lumens or delivered lumens from the luminaire.

### DRIVER

**Dimmable** Yes

**Driver Included** Yes

**Integrated Driver** No

**Driver Mode** Constant Current

**Driver Type** DALI DT6 LED Driver

DALI DT6 ~ Includes DALI-2 Driver with full support for DT6 allowing flicker free dimming with compliant DALI-2 Application controllers.

**Wiring Type** Re-wireable terminal block (4 pin)

### COMPLIANCE

**Product Design Life** 8 years

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

**Daily Use** 16 hrs

The Daily Use is the recommended time required to meet the product's design life. Installations can exceed this time, however the product design life will be reduced proportionally.

**Standards**  
 AS/NZS 60598.1  
 AS/NZS 60598.2.2  
 AS/NZS 61347.1  
 AS/NZS 61347.2.13  
 IEC/TR 62778  
 IEC 62031  
 AS CISPR 15  
 IEC 62386-102  
 IEC 62386-207

### WARRANTY

**Commercial Use Warranty** 5 RTB (Total 5 Years)

**Warranty Operating Hours** 30000 hrs

This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

### DIMENSIONS


**Product Height** 72 mm

**Product Length** 595 mm

**Product Width** 295 mm


### LINE DRAWINGS

EV/CURVE/ADV/306

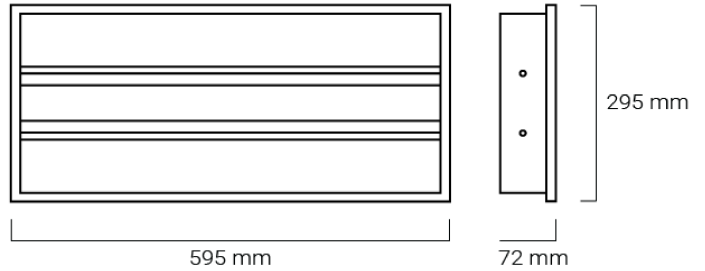

### PHOTOMETRICS

EV/CURVE/ADV/306/9W

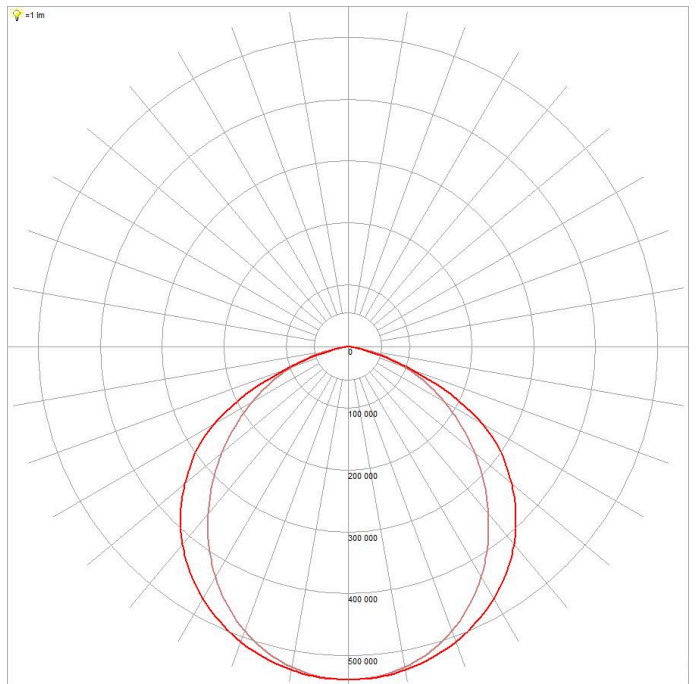


# CURVE ADV

Curve Advanced Troffer, CRI >80

## FEATURES

- Low-glare curved reflector and even light distribution
- External LED driver for easy maintenance and installation
- Supplied with a choice of different softwiring and hardwiring options
- High efficiency design with >150Lm/W output
- Excellent L90B10 lifetime for energy efficient lighting designs
- Flicker free DALI-2 certified LED driver giving excellent compatibility

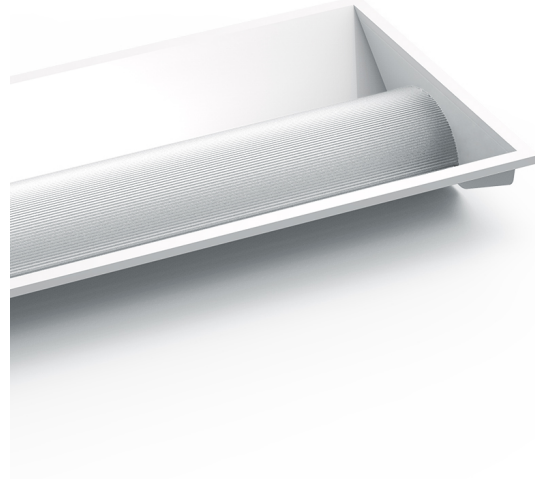

| ORDERING INFORMATION   |   |
|--|---|
| Order code   | 13533   |
| Description  | 9W Curve Adv Troffer<br>300x600mm - 4000K - DALI - CMS Plug |
| Driver Type  | DALI DT6 LED Driver   |
| DALI DT6 ~ Includes DALI-2 Driver with full support for DT6 allowing flicker free dimming with compliant DALI-2 Application controllers. |   |
| Item Code  | EV-CURVE-ADV-306-9W-DC                                      |

| MECHANICAL        |                   |
|-------------------|-------------------|
| Body Material     | Cold rolled steel |
| Diffuser Material | PMMA              |
| Product Finish    | Powder coated     |
| Fitting Colour    | White             |
| Installation Type | Recessed          |
| IP Rating         | IP40              |

| ELECTRICAL  |          |
|---|----------|
| Electrical Rating   | Class II |
| Input Current   | 0.05 A   |
| Input Frequency   | 50 Hz    |
| Input voltage   | 230Vac   |
| In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6% |          |
| Maximum Wattage   | 9 W      |
| Power Factor  | 0.95     |

|                    |            |
|--------------------|------------|
| Switch Type        | Via DALI   |
| Working Temp Range | 0 to 40 °C |

| LAMP  |                        |
|---|------------------------|
| Macadam Steps (SDCM)  | 4-step MacAdam Ellipse |
| CCT Configuration   | Single                 |
| CRI   | >80                    |
| Lamp/LED Current  | 250 mA                 |
| Lamp/LED voltage  | 36 V                   |
| System Efficiency   | 144 lm/W               |
| UGR   | <19                    |
| UGR (Unified Glare Rating) is reported as per AS/NZS 1680.2 using the following design parameters; room reflectance 0.7/0.5/0.2 (C/W/F), ceiling height 2.7m, LLF=0.8 (Nominal) from the corrected UGR table. |                        |

| LED LIFETIME  |             |             |
|---|-------------|-------------|
| LED Lifetime  | >54,000 hrs |             |
| This is the Reported LED Lifetime in Hours based on TM-21. Ektor does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below. |             |             |
| Ambient Temp (°C)   | 25 °C       | 40 °C       |
| L90B10  | 53,000 hrs  | 53,000 hrs  |
| L80B10  | >54,000 hrs | >54,000 hrs |
| L70B10  | >54,000 hrs | >54,000 hrs |

This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the proceeding number gives the resultant lumen output at the end of it reported lifetime. L70, would mean 30% lumen depreciation which means 70% of its initial output and is tested accordingly to TM-21. The B part refers to failures, which can be define as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers

to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime, the system will reach the defined lumen depreciation and the average led failures is defined by the B rating. The B rating is defined in and tested to IEC62717.

**TM-21 Test Hours** 9000 hrs

### COLOUR TEMPERATURE

**CCT** 4000 K

**Luminaire Lumens** 1300 lm

All photometric data has a tolerance of  $\pm 10\%$ . Luminaire lumens refers to the exit lumens or delivered lumens from the luminaire.

### DRIVER

**Dimmable** Yes

**Driver Included** Yes

**Integrated Driver** No

**Driver Mode** Constant Current

**Driver Type** DALI DT6 LED Driver

DALI DT6 ~ Includes DALI-2 Driver with full support for DT6 allowing flicker free dimming with compliant DALI-2 Application controllers.

**Flex & Plug or Lead Length** 2400 mm

**Wiring Type** CMS Plug (5 pin)

CMS ~ Supplied with a CMS Electracom- 5 pin plug to suit QF series wiring, model number QFP3AT

### COMPLIANCE

**Product Design Life** 8 years

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

**Daily Use** 16 hrs

The Daily Use is the recommended time required to meet the product's design life. Installations can exceed this time, however the product design life will be reduced proportionally.

**Standards**

- AS/NZS 60598.1
- AS/NZS 60598.2.2
- AS/NZS 61347.1
- AS/NZS 61347.2.13
- IEC/TR 62778
- IEC 62031
- AS/NZS 61535.1
- AS CISPR 15
- IEC 62386-102
- IEC 62386-207

### WARRANTY

**Commercial Use Warranty** 5 RTB (Total 5 Years)

**Warranty Operating Hours** 30000 hrs

This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

### DIMENSIONS


**Product Height** 72 mm

**Product Length** 595 mm

**Product Width** 295 mm


### LINE DRAWINGS

EV/CURVE/ADV/306

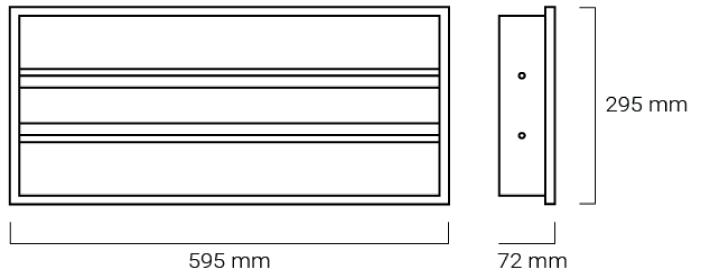

### PHOTOMETRICS

EV/CURVE/ADV/306/9W

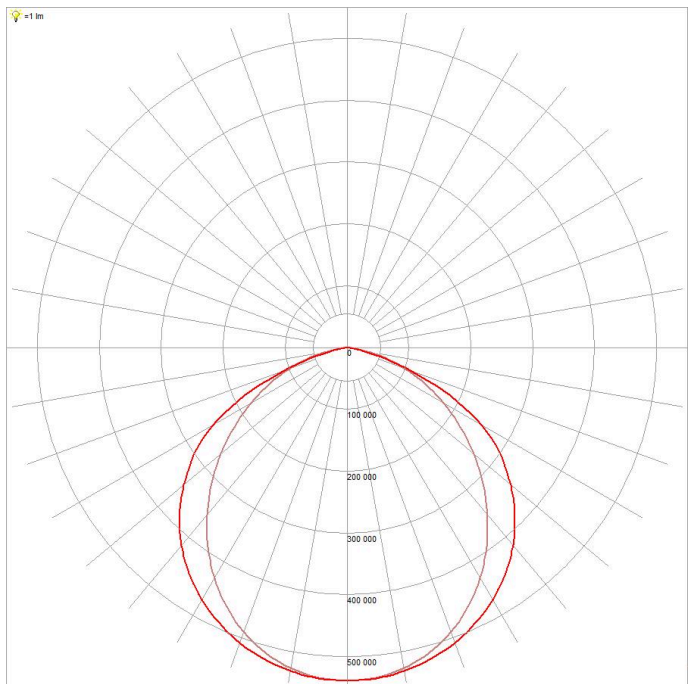


# CURVE ADV

Curve Advanced Troffer, CRI >80

## FEATURES

- Low-glare curved reflector and even light distribution
- External LED driver for easy maintenance and installation
- Supplied with a choice of different softwiring and hardwiring options
- High efficiency design with >150Lm/W output
- Excellent L90B10 lifetime for energy efficient lighting designs
- Flicker free DALI-2 certified LED driver giving excellent compatibility

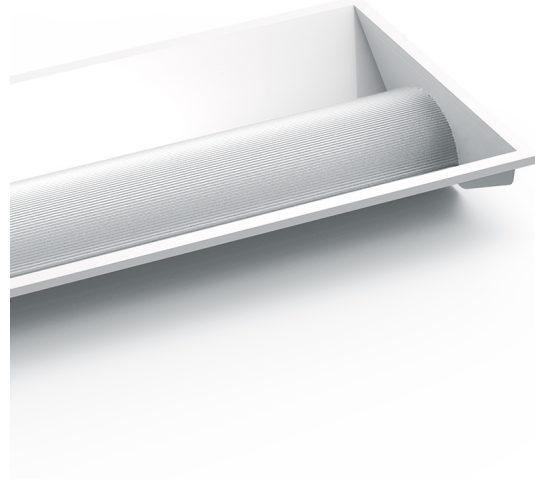

| ORDERING INFORMATION   |  |
|--|--|
| Order code   | 13534  |
| Description  | 9W Curve Adv Troffer<br>300x600mm - 4000K - DALI -<br>Wire by Click Plug |
| Driver Type  | DALI DT6 LED Driver  |
| DALI DT6 ~ Includes DALI-2 Driver with full support for DT6 allowing flicker free dimming with compliant DALI-2 Application controllers. |  |
| Item Code  | EV-CURVE-ADV-306-9W-DW   |

| MECHANICAL        |                   |
|-------------------|-------------------|
| Body Material     | Cold rolled steel |
| Diffuser Material | PMMA              |
| Product Finish    | Powder coated     |
| Fitting Colour    | White             |
| Installation Type | Recessed          |
| IP Rating         | IP40              |

| ELECTRICAL  |          |
|---|----------|
| Electrical Rating   | Class II |
| Input Current   | 0.05 A   |
| Input Frequency   | 50 Hz    |
| Input voltage   | 230Vac   |
| In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6% |          |
| Maximum Wattage   | 9 W      |
| Power Factor  | 0.95     |

|                    |            |
|--------------------|------------|
| Switch Type        | Via DALI   |
| Working Temp Range | 0 to 40 °C |

| LAMP  |                        |
|---|------------------------|
| Macadam Steps (SDCM)  | 4-step MacAdam Ellipse |
| CCT Configuration   | Single                 |
| CRI   | >80                    |
| Lamp/LED Current  | 250 mA                 |
| Lamp/LED voltage  | 36 V                   |
| System Efficiency   | 144 lm/W               |
| UGR   | <19                    |
| UGR (Unified Glare Rating) is reported as per AS/NZS 1680.2 using the following design parameters; room reflectance 0.7/0.5/0.2 (C/W/F), ceiling height 2.7m, LLF=0.8 (Nominal) from the corrected UGR table. |                        |

| LED LIFETIME  |             |             |
|---|-------------|-------------|
| LED Lifetime  | >54,000 hrs |             |
| This is the Reported LED Lifetime in Hours based on TM-21. Ektor does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below. |             |             |
| Ambient Temp (°C)   | 25 °C       | 40 °C       |
| L90B10  | 53,000 hrs  | 53,000 hrs  |
| L80B10  | >54,000 hrs | >54,000 hrs |
| L70B10  | >54,000 hrs | >54,000 hrs |

This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the proceeding number gives the resultant lumen output at the end of it reported lifetime. L70, would mean 30% lumen depreciation which means 70% of its initial output and is tested accordingly to TM-21. The B part refers to failures, which can be define as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers



to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime, the system will reach the defined lumen depreciation and the average led failures is defined by the B rating. The B rating is defined in and tested to IEC62717.

|                         |          |
|-------------------------|----------|
| <b>TM-21 Test Hours</b> | 9000 hrs |
|-------------------------|----------|

### COLOUR TEMPERATURE

|                         |         |
|-------------------------|---------|
| <b>CCT</b>              | 4000 K  |
| <b>Luminaire Lumens</b> | 1300 lm |

All photometric data has a tolerance of  $\pm 10\%$ . Luminaire lumens refers to the exit lumens or delivered lumens from the luminaire.

### DRIVER

|                          |                     |
|--------------------------|---------------------|
| <b>Dimmable</b>          | Yes                 |
| <b>Driver Included</b>   | Yes                 |
| <b>Integrated Driver</b> | No                  |
| <b>Driver Mode</b>       | Constant Current    |
| <b>Driver Type</b>       | DALI DT6 LED Driver |

DALI DT6 ~ Includes DALI-2 Driver with full support for DT6 allowing flicker free dimming with compliant DALI-2 Application controllers.

|                                       |                  |
|---------------------------------------|------------------|
| <b>Flex &amp; Plug or Lead Length</b> | 2400 mm          |
| <b>Wiring Type</b>                    | WBC Plug (5 pin) |

WBC ~ Supplied with a Wire by click- 5 pin plug, model number LA1025/5

### COMPLIANCE

|                            |         |
|----------------------------|---------|
| <b>Product Design Life</b> | 8 years |
|----------------------------|---------|

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

|                  |        |
|------------------|--------|
| <b>Daily Use</b> | 16 hrs |
|------------------|--------|

The Daily Use is the recommended time required to meet the product's design life. Installations can exceed this time, however the product design life will be reduced proportionally.

|                  |   |
|------------------|---|
| <b>Standards</b> | AS/NZS 60598.1<br>AS/NZS 60598.2.2<br>AS/NZS 61347.1<br>AS/NZS 61347.2.13<br>IEC/TR 62778<br>IEC 62031<br>AS/NZS 61535.1<br>AS CISPR 15<br>IEC 62386-102<br>IEC 62386-207 |
|------------------|---|

### WARRANTY

|                                 |                       |
|---------------------------------|-----------------------|
| <b>Commercial Use Warranty</b>  | 5 RTB (Total 5 Years) |
| <b>Warranty Operating Hours</b> | 30000 hrs             |


This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

### DIMENSIONS

|                       |        |
|-----------------------|--------|
| <b>Product Height</b> | 72 mm  |
| <b>Product Length</b> | 595 mm |
| <b>Product Width</b>  | 295 mm |


### LINE DRAWINGS

EV/CURVE/ADV/306

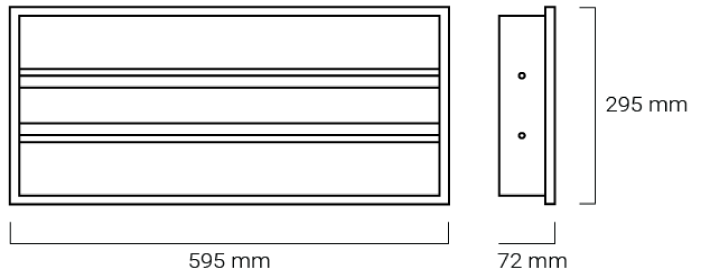

### PHOTOMETRICS

EV/CURVE/ADV/306/9W

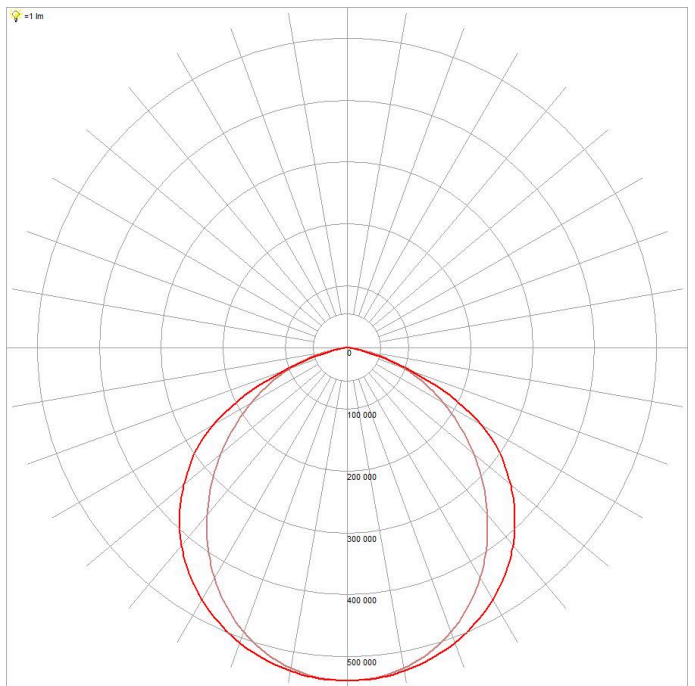




# CURVE ADV

Curve Advanced Troffer, CRI >80

## FEATURES

- Low-glare curved reflector and even light distribution
- External LED driver for easy maintenance and installation
- Supplied with a choice of different softwiring and hardwiring options
- High efficiency design with >150lm/W output
- Excellent L90B10 lifetime for energy efficient lighting designs
- Flicker free DALI-2 certified LED driver giving excellent compatibility

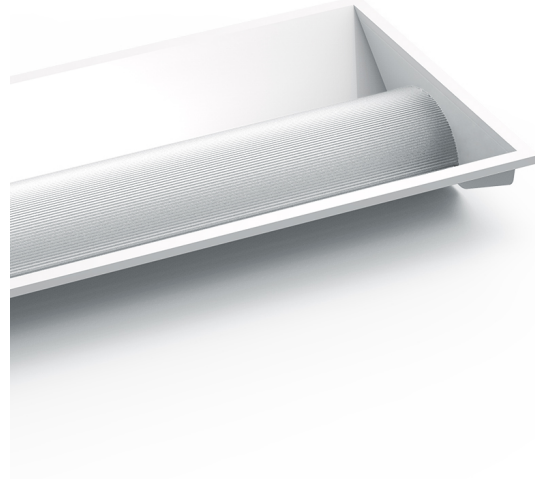

| ORDERING INFORMATION   |   |
|--|---|
| Order code   | 13542   |
| Description  | 11W Curve Adv Troffer<br>300x600mm - 4000K - DALI |
| Driver Type  | DALI DT6 LED Driver                               |
| DALI DT6 ~ Includes DALI-2 Driver with full support for DT6 allowing flicker free dimming with compliant DALI-2 Application controllers. |   |
| Item Code  | EV-CURVE-ADV-306-11W-DA                           |

| MECHANICAL        |                   |
|-------------------|-------------------|
| Body Material     | Cold rolled steel |
| Diffuser Material | PMMA              |
| Product Finish    | Powder coated     |
| Fitting Colour    | White             |
| Installation Type | Recessed          |
| IP Rating         | IP40              |

| ELECTRICAL  |          |
|---|----------|
| Electrical Rating   | Class II |
| Input Current   | 0.06 A   |
| Input Frequency   | 50 Hz    |
| Input voltage   | 230Vac   |
| In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6% |          |
| Maximum Wattage   | 11 W     |
| Power Factor  | 0.95     |
| Switch Type   | Via DALI |

|                    |            |
|--------------------|------------|
| Working Temp Range | 0 to 40 °C |
|--------------------|------------|

| LAMP  |                        |
|---|------------------------|
| Macadam Steps (SDCM)  | 4-step MacAdam Ellipse |
| CCT Configuration   | Single                 |
| CRI   | >80                    |
| Lamp/LED Current  | 300 mA                 |
| Lamp/LED voltage  | 36 V                   |
| System Efficiency   | 145 lm/W               |
| UGR   | <19                    |
| UGR (Unified Glare Rating) is reported as per AS/NZS 1680.2 using the following design parameters; room reflectance 0.7/0.5/0.2 (C/W/F), ceiling height 2.7m, LLF=0.8 (Nominal) from the corrected UGR table. |                        |

| LED LIFETIME  |             |             |
|---|-------------|-------------|
| LED Lifetime  | >54,000 hrs |             |
| This is the Reported LED Lifetime in Hours based on TM-21. Ektor does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below. |             |             |
| Ambient Temp (°C)   | 25 °C       | 40 °C       |
| L90B10  | 53,000 hrs  | 53,000 hrs  |
| L80B10  | >54,000 hrs | >54,000 hrs |
| L70B10  | >54,000 hrs | >54,000 hrs |

This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the proceeding number gives the resultant lumen output at the end of it reported lifetime. L70, would mean 30% lumen depreciation which means 70% of its initial output and is tested accordingly to TM-21. The B part refers to failures, which can be define as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime, the system will reach the defined lumen depreciation and the average led



failures is defined by the B rating. The B rating is defined in and tested to IEC62717.

|                         |          |
|-------------------------|----------|
| <b>TM-21 Test Hours</b> | 9000 hrs |
|-------------------------|----------|

### COLOUR TEMPERATURE

|                         |         |
|-------------------------|---------|
| <b>CCT</b>              | 4000 K  |
| <b>Luminaire Lumens</b> | 1600 lm |

All photometric data has a tolerance of  $\pm 10\%$ . Luminaire lumens refers to the exit lumens or delivered lumens from the luminaire.

### DRIVER

|  |                                    |
|--|------------------------------------|
| <b>Dimmable</b>  | Yes                                |
| <b>Driver Included</b>   | Yes                                |
| <b>Integrated Driver</b>   | No                                 |
| <b>Driver Mode</b>   | Constant Current                   |
| <b>Driver Type</b>   | DALI DT6 LED Driver                |
| DALI DT6 ~ Includes DALI-2 Driver with full support for DT6 allowing flicker free dimming with compliant DALI-2 Application controllers. |                                    |
| <b>Wiring Type</b>   | Re-wireable terminal block (4 pin) |

### COMPLIANCE

|                            |         |
|----------------------------|---------|
| <b>Product Design Life</b> | 8 years |
|----------------------------|---------|

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

|                  |        |
|------------------|--------|
| <b>Daily Use</b> | 16 hrs |
|------------------|--------|

The Daily Use is the recommended time required to meet the product's design life. Installations can exceed this time, however the product design life will be reduced proportionally.

|                  |   |
|------------------|---|
| <b>Standards</b> | AS/NZS 60598.1<br>AS/NZS 60598.2.2<br>AS/NZS 61347.1<br>AS/NZS 61347.2.13<br>IEC/TR 62778<br>IEC 62031<br>AS CISPR 15<br>IEC 62386-102<br>IEC 62386-207 |
|------------------|---|

### WARRANTY

|                                 |                       |
|---------------------------------|-----------------------|
| <b>Commercial Use Warranty</b>  | 5 RTB (Total 5 Years) |
| <b>Warranty Operating Hours</b> | 30000 hrs             |


This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

### DIMENSIONS

|                       |        |
|-----------------------|--------|
| <b>Product Height</b> | 72 mm  |
| <b>Product Length</b> | 595 mm |
| <b>Product Width</b>  | 295 mm |


### LINE DRAWINGS

EV/CURVE/ADV/306

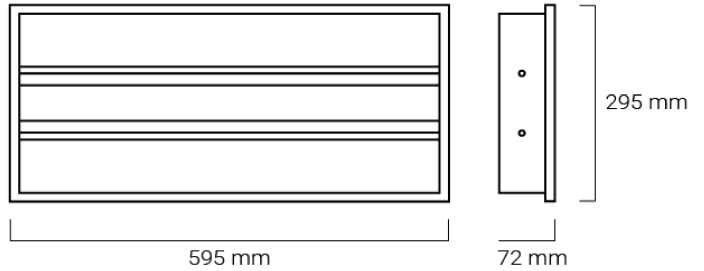

### PHOTOMETRICS

EV/CURVE/ADV/306/11W

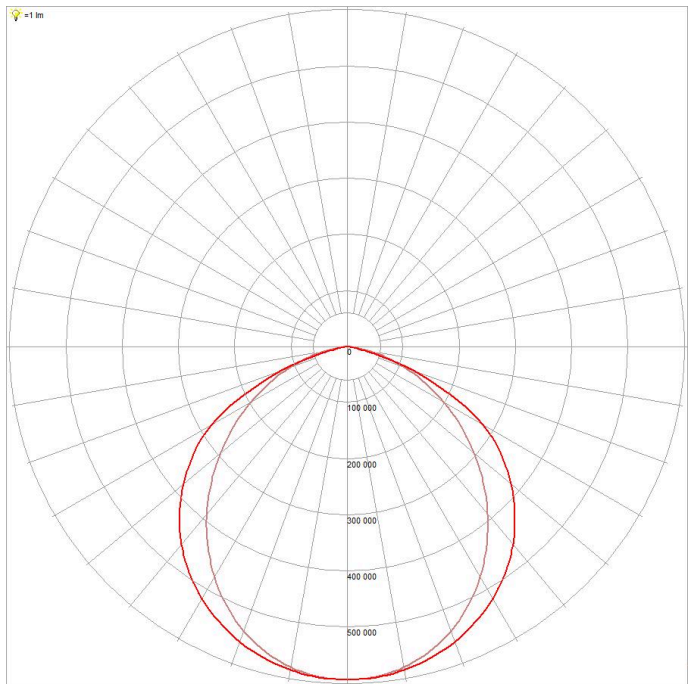




# CURVE ADV

Curve Advanced Troffer, CRI >80

## FEATURES

- Low-glare curved reflector and even light distribution
- External LED driver for easy maintenance and installation
- Supplied with a choice of different softwiring and hardwiring options
- High efficiency design with >150Lm/W output
- Excellent L90B10 lifetime for energy efficient lighting designs
- Flicker free DALI-2 certified LED driver giving excellent compatibility

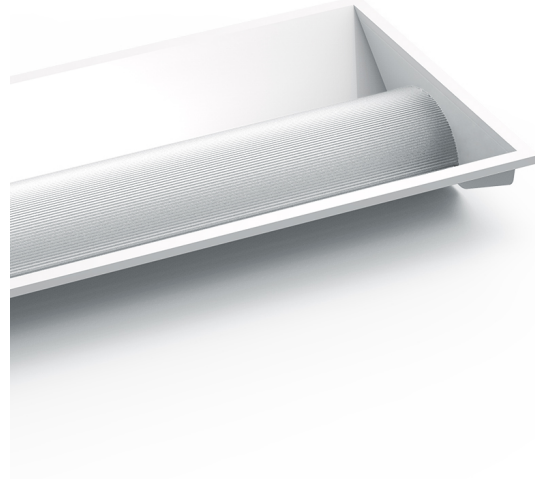

| ORDERING INFORMATION   |  |
|--|--|
| Order code   | 13543  |
| Description  | 11W Curve Adv Troffer<br>300x600mm - 4000K - DALI - CMS Plug |
| Driver Type  | DALI DT6 LED Driver  |
| DALI DT6 ~ Includes DALI-2 Driver with full support for DT6 allowing flicker free dimming with compliant DALI-2 Application controllers. |  |
| Item Code  | EV-CURVE-ADV-306-11W-DC                                      |

| MECHANICAL        |                   |
|-------------------|-------------------|
| Body Material     | Cold rolled steel |
| Diffuser Material | PMMA              |
| Product Finish    | Powder coated     |
| Fitting Colour    | White             |
| Installation Type | Recessed          |
| IP Rating         | IP40              |

| ELECTRICAL  |          |
|---|----------|
| Electrical Rating   | Class II |
| Input Current   | 0.06 A   |
| Input Frequency   | 50 Hz    |
| Input voltage   | 230Vac   |
| In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6% |          |
| Maximum Wattage   | 11 W     |
| Power Factor  | 0.95     |

|                    |            |
|--------------------|------------|
| Switch Type        | Via DALI   |
| Working Temp Range | 0 to 40 °C |

| LAMP  |                        |
|---|------------------------|
| Macadam Steps (SDCM)  | 4-step MacAdam Ellipse |
| CCT Configuration   | Single                 |
| CRI   | >80                    |
| Lamp/LED Current  | 300 mA                 |
| Lamp/LED voltage  | 36 V                   |
| System Efficiency   | 145 lm/W               |
| UGR   | <19                    |
| UGR (Unified Glare Rating) is reported as per AS/NZS 1680.2 using the following design parameters; room reflectance 0.7/0.5/0.2 (C/W/F), ceiling height 2.7m, LLF=0.8 (Nominal) from the corrected UGR table. |                        |

| LED LIFETIME  |             |             |
|---|-------------|-------------|
| LED Lifetime  | >54,000 hrs |             |
| This is the Reported LED Lifetime in Hours based on TM-21. Ektor does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below. |             |             |
| Ambient Temp (°C)   | 25 °C       | 40 °C       |
| L90B10  | 53,000 hrs  | 53,000 hrs  |
| L80B10  | >54,000 hrs | >54,000 hrs |
| L70B10  | >54,000 hrs | >54,000 hrs |

This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the proceeding number gives the resultant lumen output at the end of it reported lifetime. L70, would mean 30% lumen depreciation which means 70% of its initial output and is tested accordingly to TM-21. The B part refers to failures, which can be define as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers

to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime, the system will reach the defined lumen depreciation and the average led failures is defined by the B rating. The B rating is defined in and tested to IEC62717.

|                         |          |
|-------------------------|----------|
| <b>TM-21 Test Hours</b> | 9000 hrs |
|-------------------------|----------|

### COLOUR TEMPERATURE

|            |        |
|------------|--------|
| <b>CCT</b> | 4000 K |
|------------|--------|

|                         |         |
|-------------------------|---------|
| <b>Luminaire Lumens</b> | 1600 lm |
|-------------------------|---------|

All photometric data has a tolerance of  $\pm 10\%$ . Luminaire lumens refers to the exit lumens or delivered lumens from the luminaire.

### DRIVER

|                 |     |
|-----------------|-----|
| <b>Dimmable</b> | Yes |
|-----------------|-----|

|                        |     |
|------------------------|-----|
| <b>Driver Included</b> | Yes |
|------------------------|-----|

|                          |    |
|--------------------------|----|
| <b>Integrated Driver</b> | No |
|--------------------------|----|

|                    |                  |
|--------------------|------------------|
| <b>Driver Mode</b> | Constant Current |
|--------------------|------------------|

|                    |                     |
|--------------------|---------------------|
| <b>Driver Type</b> | DALI DT6 LED Driver |
|--------------------|---------------------|

DALI DT6 ~ Includes DALI-2 Driver with full support for DT6 allowing flicker free dimming with compliant DALI-2 Application controllers.

|                                       |         |
|---------------------------------------|---------|
| <b>Flex &amp; Plug or Lead Length</b> | 2400 mm |
|---------------------------------------|---------|

|                    |                  |
|--------------------|------------------|
| <b>Wiring Type</b> | CMS Plug (5 pin) |
|--------------------|------------------|

CMS ~ Supplied with a CMS Electracom- 5 pin plug to suit QF series wiring, model number QFP3AT

### COMPLIANCE

|                            |         |
|----------------------------|---------|
| <b>Product Design Life</b> | 8 years |
|----------------------------|---------|

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

|                  |        |
|------------------|--------|
| <b>Daily Use</b> | 16 hrs |
|------------------|--------|

The Daily Use is the recommended time required to meet the product's design life. Installations can exceed this time, however the product design life will be reduced proportionally.

|                  |   |
|------------------|---|
| <b>Standards</b> | AS/NZS 60598.1<br>AS/NZS 60598.2.2<br>AS/NZS 61347.1<br>AS/NZS 61347.2.13<br>IEC/TR 62778<br>IEC 62031<br>AS/NZS 61535.1<br>AS CISPR 15<br>IEC 62386-102<br>IEC 62386-207 |
|------------------|---|

### WARRANTY

|                                |                       |
|--------------------------------|-----------------------|
| <b>Commercial Use Warranty</b> | 5 RTB (Total 5 Years) |
|--------------------------------|-----------------------|

|                                 |           |
|---------------------------------|-----------|
| <b>Warranty Operating Hours</b> | 30000 hrs |
|---------------------------------|-----------|

This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

### DIMENSIONS


|                       |       |
|-----------------------|-------|
| <b>Product Height</b> | 72 mm |
|-----------------------|-------|

|                       |        |
|-----------------------|--------|
| <b>Product Length</b> | 595 mm |
|-----------------------|--------|

|                      |        |
|----------------------|--------|
| <b>Product Width</b> | 295 mm |
|----------------------|--------|


### LINE DRAWINGS

EV/CURVE/ADV/306

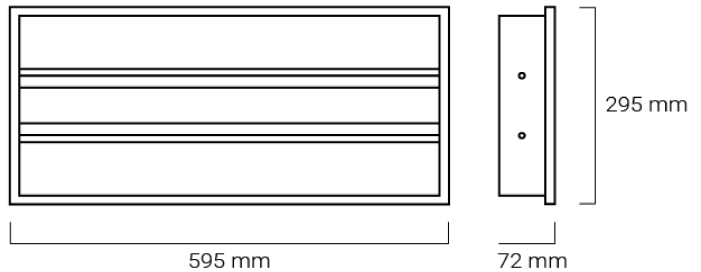

### PHOTOMETRICS

EV/CURVE/ADV/306/11W

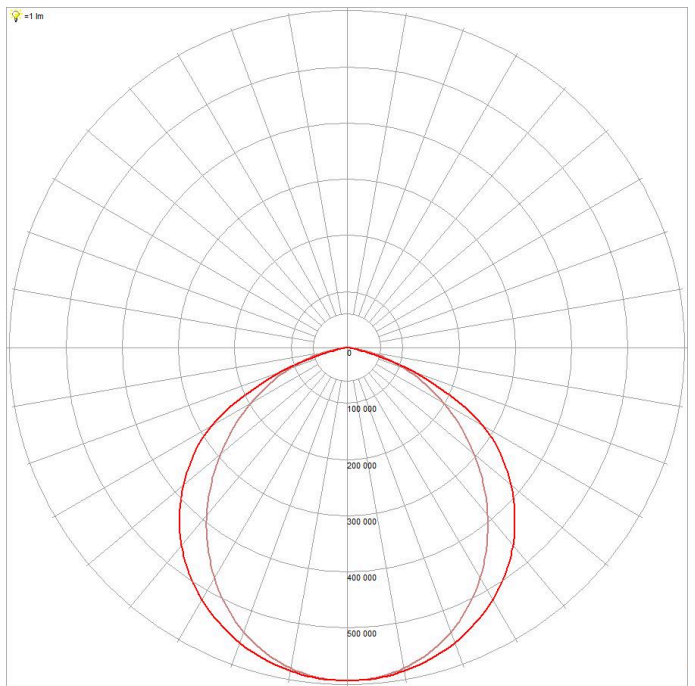


# CURVE ADV

Curve Advanced Troffer, CRI >80

## FEATURES

- Low-glare curved reflector and even light distribution
- External LED driver for easy maintenance and installation
- Supplied with a choice of different softwiring and hardwiring options
- High efficiency design with >150Lm/W output
- Excellent L90B10 lifetime for energy efficient lighting designs
- Flicker free DALI-2 certified LED driver giving excellent compatibility

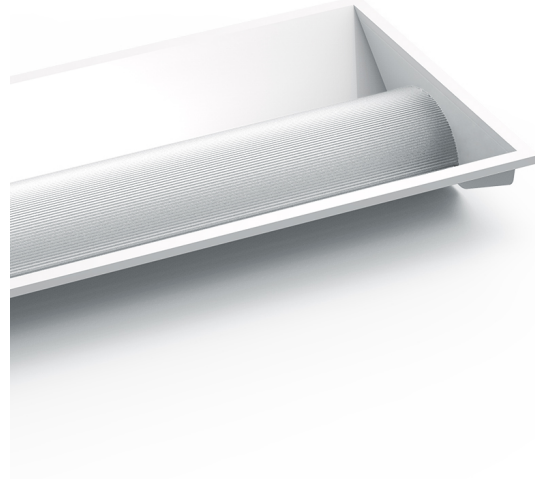

| ORDERING INFORMATION   |   |
|--|---|
| Order code   | 13544   |
| Description  | 11W Curve Adv Troffer<br>300x600mm - 4000K - DALI -<br>Wire by Click Plug |
| Driver Type  | DALI DT6 LED Driver   |
| DALI DT6 ~ Includes DALI-2 Driver with full support for DT6 allowing flicker free dimming with compliant DALI-2 Application controllers. |   |
| Item Code  | EV-CURVE-ADV-306-11W-DW   |

| MECHANICAL        |                   |
|-------------------|-------------------|
| Body Material     | Cold rolled steel |
| Diffuser Material | PMMA              |
| Product Finish    | Powder coated     |
| Fitting Colour    | White             |
| Installation Type | Recessed          |
| IP Rating         | IP40              |

| ELECTRICAL  |          |
|---|----------|
| Electrical Rating   | Class II |
| Input Current   | 0.06 A   |
| Input Frequency   | 50 Hz    |
| Input voltage   | 230Vac   |
| In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6% |          |
| Maximum Wattage   | 11 W     |
| Power Factor  | 0.95     |

|                    |            |
|--------------------|------------|
| Switch Type        | Via DALI   |
| Working Temp Range | 0 to 40 °C |

| LAMP  |                        |
|---|------------------------|
| Macadam Steps (SDCM)  | 4-step MacAdam Ellipse |
| CCT Configuration   | Single                 |
| CRI   | >80                    |
| Lamp/LED Current  | 300 mA                 |
| Lamp/LED voltage  | 36 V                   |
| System Efficiency   | 145 lm/W               |
| UGR   | <19                    |
| UGR (Unified Glare Rating) is reported as per AS/NZS 1680.2 using the following design parameters; room reflectance 0.7/0.5/0.2 (C/W/F), ceiling height 2.7m, LLF=0.8 (Nominal) from the corrected UGR table. |                        |

| LED LIFETIME  |             |             |
|---|-------------|-------------|
| LED Lifetime  | >54,000 hrs |             |
| This is the Reported LED Lifetime in Hours based on TM-21. Ektor does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below. |             |             |
| Ambient Temp (°C)   | 25 °C       | 40 °C       |
| L90B10  | 53,000 hrs  | 53,000 hrs  |
| L80B10  | >54,000 hrs | >54,000 hrs |
| L70B10  | >54,000 hrs | >54,000 hrs |

This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the proceeding number gives the resultant lumen output at the end of it reported lifetime. L70, would mean 30% lumen depreciation which means 70% of its initial output and is tested accordingly to TM-21. The B part refers to failures, which can be define as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers



to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime, the system will reach the defined lumen depreciation and the average led failures is defined by the B rating. The B rating is defined in and tested to IEC62717.

|                         |          |
|-------------------------|----------|
| <b>TM-21 Test Hours</b> | 9000 hrs |
|-------------------------|----------|

### COLOUR TEMPERATURE

|                         |         |
|-------------------------|---------|
| <b>CCT</b>              | 4000 K  |
| <b>Luminaire Lumens</b> | 1600 lm |

All photometric data has a tolerance of  $\pm 10\%$ . Luminaire lumens refers to the exit lumens or delivered lumens from the luminaire.

### DRIVER

|                          |                     |
|--------------------------|---------------------|
| <b>Dimmable</b>          | Yes                 |
| <b>Driver Included</b>   | Yes                 |
| <b>Integrated Driver</b> | No                  |
| <b>Driver Mode</b>       | Constant Current    |
| <b>Driver Type</b>       | DALI DT6 LED Driver |

DALI DT6 ~ Includes DALI-2 Driver with full support for DT6 allowing flicker free dimming with compliant DALI-2 Application controllers.

|                                       |                  |
|---------------------------------------|------------------|
| <b>Flex &amp; Plug or Lead Length</b> | 2400 mm          |
| <b>Wiring Type</b>                    | WBC Plug (5 pin) |

WBC ~ Supplied with a Wire by click- 5 pin plug, model number LA1025/5

### COMPLIANCE

|                            |         |
|----------------------------|---------|
| <b>Product Design Life</b> | 8 years |
|----------------------------|---------|

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

|                  |        |
|------------------|--------|
| <b>Daily Use</b> | 16 hrs |
|------------------|--------|

The Daily Use is the recommended time required to meet the product's design life. Installations can exceed this time, however the product design life will be reduced proportionally.

|                  |   |
|------------------|---|
| <b>Standards</b> | AS/NZS 60598.1<br>AS/NZS 60598.2.2<br>AS/NZS 61347.1<br>AS/NZS 61347.2.13<br>IEC/TR 62778<br>IEC 62031<br>AS/NZS 61535.1<br>AS CISPR 15<br>IEC 62386-102<br>IEC 62386-207 |
|------------------|---|

### WARRANTY

|                                 |                       |
|---------------------------------|-----------------------|
| <b>Commercial Use Warranty</b>  | 5 RTB (Total 5 Years) |
| <b>Warranty Operating Hours</b> | 30000 hrs             |


This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

### DIMENSIONS

|                       |        |
|-----------------------|--------|
| <b>Product Height</b> | 72 mm  |
| <b>Product Length</b> | 595 mm |
| <b>Product Width</b>  | 295 mm |


### LINE DRAWINGS

EV/CURVE/ADV/306

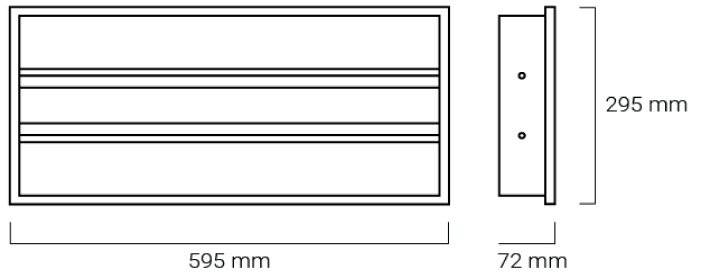

### PHOTOMETRICS

EV/CURVE/ADV/306/11W

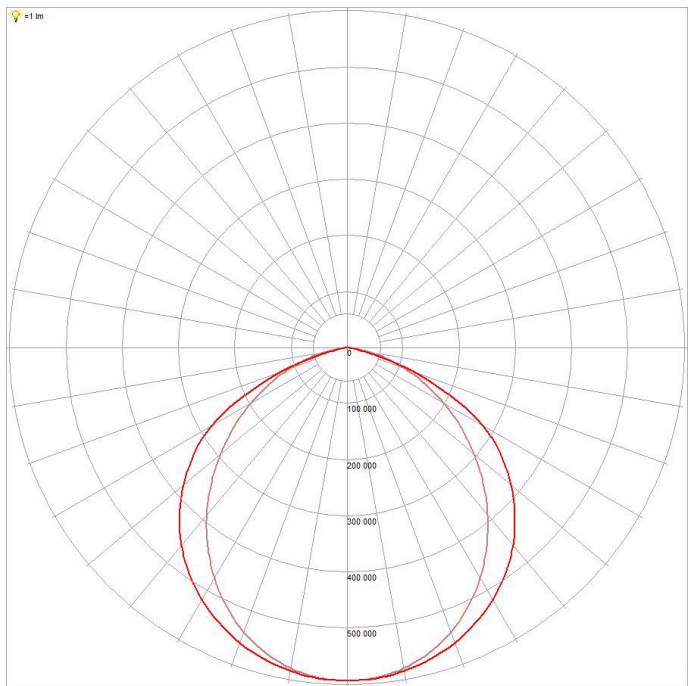


# CURVE ADV

Curve Advanced Troffer, CRI >80

## FEATURES

- Low-glare curved reflector and even light distribution
- External LED driver for easy maintenance and installation
- Supplied with a choice of different softwiring and hardwiring options
- High efficiency design with >150Lm/W output
- Excellent L90B10 lifetime for energy efficient lighting designs
- Flicker free DALI-2 certified LED driver giving excellent compatibility

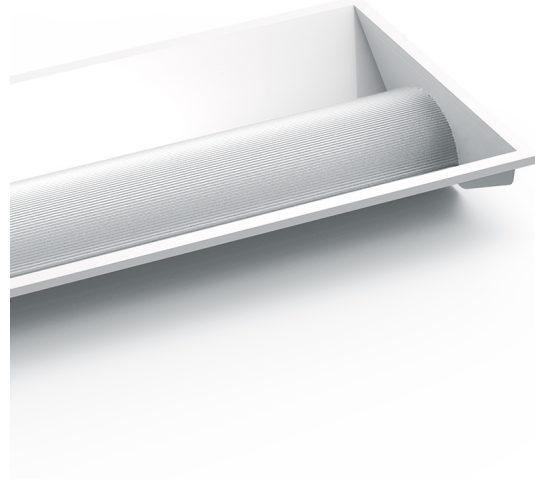

| ORDERING INFORMATION   |   |
|--|---|
| Order code   | 13548   |
| Description  | 15W Curve Adv Troffer<br>300x600mm - 4000K - DALI |
| Driver Type  | DALI DT6 LED Driver                               |
| DALI DT6 ~ Includes DALI-2 Driver with full support for DT6 allowing flicker free dimming with compliant DALI-2 Application controllers. |   |
| Item Code  | EV-CURVE-ADV-306-15W-DA                           |

| MECHANICAL        |                   |
|-------------------|-------------------|
| Body Material     | Cold rolled steel |
| Diffuser Material | PMMA              |
| Product Finish    | Powder coated     |
| Fitting Colour    | White             |
| Installation Type | Recessed          |
| IP Rating         | IP40              |

| ELECTRICAL  |          |
|---|----------|
| Electrical Rating   | Class II |
| Input Current   | 0.08 A   |
| Input Frequency   | 50 Hz    |
| Input voltage   | 230Vac   |
| In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6% |          |
| Maximum Wattage   | 15 W     |
| Power Factor  | 0.95     |
| Switch Type   | Via DALI |

|                    |            |
|--------------------|------------|
| Working Temp Range | 0 to 40 °C |
|--------------------|------------|

| LAMP  |                        |
|---|------------------------|
| Macadam Steps (SDCM)  | 4-step MacAdam Ellipse |
| CCT Configuration   | Single                 |
| CRI   | >80                    |
| Lamp/LED Current  | 400 mA                 |
| Lamp/LED voltage  | 36 V                   |
| System Efficiency   | 139 lm/W               |
| UGR   | <19                    |
| UGR (Unified Glare Rating) is reported as per AS/NZS 1680.2 using the following design parameters; room reflectance 0.7/0.5/0.2 (C/W/F), ceiling height 2.7m, LLF=0.8 (Nominal) from the corrected UGR table. |                        |

| LED LIFETIME  |             |             |
|---|-------------|-------------|
| LED Lifetime  | >54,000 hrs |             |
| This is the Reported LED Lifetime in Hours based on TM-21. Ektor does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below. |             |             |
| Ambient Temp (°C)   | 25 °C       | 40 °C       |
| L90B10  | 53,000 hrs  | 53,000 hrs  |
| L80B10  | >54,000 hrs | >54,000 hrs |
| L70B10  | >54,000 hrs | >54,000 hrs |

This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the proceeding number gives the resultant lumen output at the end of it reported lifetime. L70, would mean 30% lumen depreciation which means 70% of its initial output and is tested accordingly to TM-21. The B part refers to failures, which can be define as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime, the system will reach the defined lumen depreciation and the average led

failures is defined by the B rating. The B rating is defined in and tested to IEC62717.

**TM-21 Test Hours** 9000 hrs

### COLOUR TEMPERATURE

**CCT** 4000 K

**Luminaire Lumens** 2080 lm

All photometric data has a tolerance of  $\pm 10\%$ . Luminaire lumens refers to the exit lumens or delivered lumens from the luminaire.

### DRIVER

**Dimmable** Yes

**Driver Included** Yes

**Integrated Driver** No

**Driver Mode** Constant Current

**Driver Type** DALI DT6 LED Driver

DALI DT6 ~ Includes DALI-2 Driver with full support for DT6 allowing flicker free dimming with compliant DALI-2 Application controllers.

**Wiring Type** Re-wireable terminal block (4 pin)

### COMPLIANCE

**Product Design Life** 8 years

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

**Daily Use** 16 hrs

The Daily Use is the recommended time required to meet the product's design life. Installations can exceed this time, however the product design life will be reduced proportionally.

**Standards**  
 AS/NZS 60598.1  
 AS/NZS 60598.2.2  
 AS/NZS 61347.1  
 AS/NZS 61347.2.13  
 IEC/TR 62778  
 IEC 62031  
 AS CISPR 15  
 IEC 62386-102  
 IEC 62386-207

### WARRANTY

**Commercial Use Warranty** 5 RTB (Total 5 Years)

**Warranty Operating Hours** 30000 hrs

This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

### DIMENSIONS


**Product Height** 72 mm

**Product Length** 595 mm

**Product Width** 295 mm


### LINE DRAWINGS

EV/CURVE/ADV/306

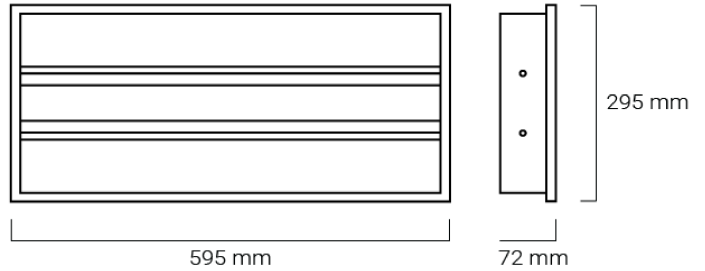

### PHOTOMETRICS

EV/CURVE/ADV/306/15W

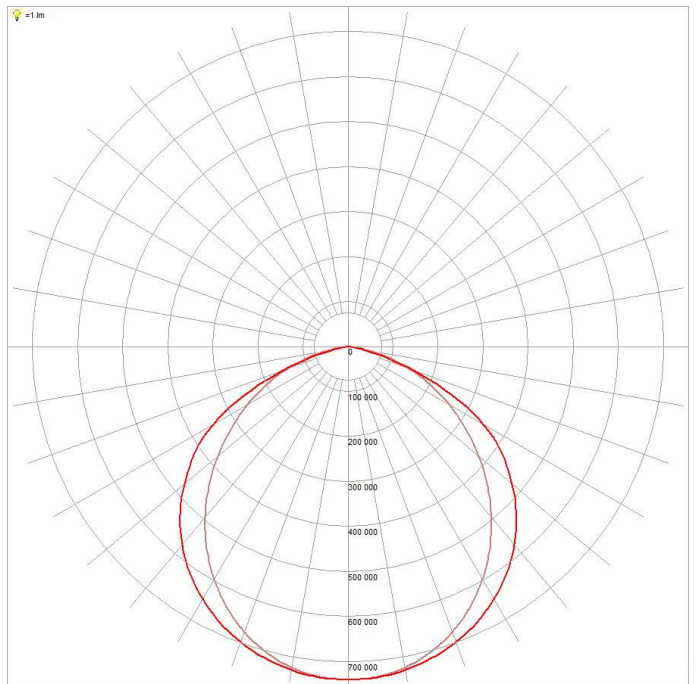




# CURVE ADV

Curve Advanced Troffer, CRI >80

## FEATURES

- Low-glare curved reflector and even light distribution
- External LED driver for easy maintenance and installation
- Supplied with a choice of different softwiring and hardwiring options
- High efficiency design with >150Lm/W output
- Excellent L90B10 lifetime for energy efficient lighting designs
- Flicker free DALI-2 certified LED driver giving excellent compatibility

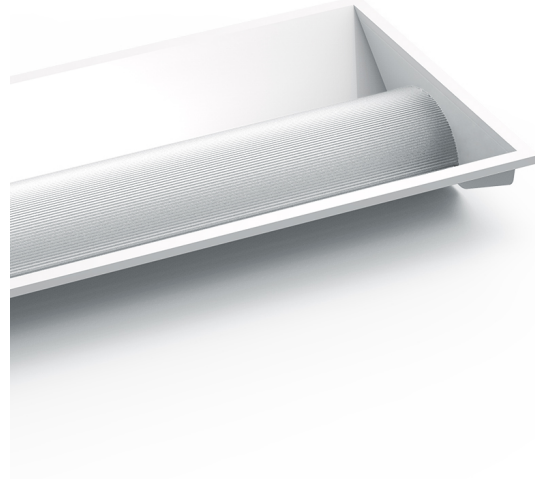

| ORDERING INFORMATION   |  |
|--|--|
| Order code   | 13549  |
| Description  | 15W Curve Adv Troffer<br>300x600mm - 4000K - DALI - CMS Plug |
| Driver Type  | DALI DT6 LED Driver  |
| DALI DT6 ~ Includes DALI-2 Driver with full support for DT6 allowing flicker free dimming with compliant DALI-2 Application controllers. |  |
| Item Code  | EV-CURVE-ADV-306-15W-DC                                      |

| MECHANICAL        |                   |
|-------------------|-------------------|
| Body Material     | Cold rolled steel |
| Diffuser Material | PMMA              |
| Product Finish    | Powder coated     |
| Fitting Colour    | White             |
| Installation Type | Recessed          |
| IP Rating         | IP40              |

| ELECTRICAL  |          |
|---|----------|
| Electrical Rating   | Class II |
| Input Current   | 0.08 A   |
| Input Frequency   | 50 Hz    |
| Input voltage   | 230Vac   |
| In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6% |          |
| Maximum Wattage   | 15 W     |
| Power Factor  | 0.95     |

|                    |            |
|--------------------|------------|
| Switch Type        | Via DALI   |
| Working Temp Range | 0 to 40 °C |

| LAMP  |                        |
|---|------------------------|
| Macadam Steps (SDCM)  | 4-step MacAdam Ellipse |
| CCT Configuration   | Single                 |
| CRI   | >80                    |
| Lamp/LED Current  | 400 mA                 |
| Lamp/LED voltage  | 36 V                   |
| System Efficiency   | 139 lm/W               |
| UGR   | <19                    |
| UGR (Unified Glare Rating) is reported as per AS/NZS 1680.2 using the following design parameters; room reflectance 0.7/0.5/0.2 (C/W/F), ceiling height 2.7m, LLF=0.8 (Nominal) from the corrected UGR table. |                        |

| LED LIFETIME  |             |             |
|---|-------------|-------------|
| LED Lifetime  | >54,000 hrs |             |
| This is the Reported LED Lifetime in Hours based on TM-21. Ektor does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below. |             |             |
| Ambient Temp (°C)   | 25 °C       | 40 °C       |
| L90B10  | 53,000 hrs  | 53,000 hrs  |
| L80B10  | >54,000 hrs | >54,000 hrs |
| L70B10  | >54,000 hrs | >54,000 hrs |

This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the proceeding number gives the resultant lumen output at the end of it reported lifetime. L70, would mean 30% lumen depreciation which means 70% of its initial output and is tested accordingly to TM-21. The B part refers to failures, which can be define as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers



to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime, the system will reach the defined lumen depreciation and the average led failures is defined by the B rating. The B rating is defined in and tested to IEC62717.

|                         |          |
|-------------------------|----------|
| <b>TM-21 Test Hours</b> | 9000 hrs |
|-------------------------|----------|

### COLOUR TEMPERATURE

|                         |         |
|-------------------------|---------|
| <b>CCT</b>              | 4000 K  |
| <b>Luminaire Lumens</b> | 2080 lm |

All photometric data has a tolerance of ±10%. Luminaire lumens refers to the exit lumens or delivered lumens from the luminaire.

### DRIVER

|                          |                     |
|--------------------------|---------------------|
| <b>Dimmable</b>          | Yes                 |
| <b>Driver Included</b>   | Yes                 |
| <b>Integrated Driver</b> | No                  |
| <b>Driver Mode</b>       | Constant Current    |
| <b>Driver Type</b>       | DALI DT6 LED Driver |

DALI DT6 ~ Includes DALI-2 Driver with full support for DT6 allowing flicker free dimming with compliant DALI-2 Application controllers.

|                                       |                  |
|---------------------------------------|------------------|
| <b>Flex &amp; Plug or Lead Length</b> | 2400 mm          |
| <b>Wiring Type</b>                    | CMS Plug (5 pin) |

CMS ~ Supplied with a CMS Electracom- 5 pin plug to suit QF series wiring, model number QFP3AT

### COMPLIANCE

|                            |         |
|----------------------------|---------|
| <b>Product Design Life</b> | 8 years |
|----------------------------|---------|

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

|                  |        |
|------------------|--------|
| <b>Daily Use</b> | 16 hrs |
|------------------|--------|

The Daily Use is the recommended time required to meet the product's design life. Installations can exceed this time, however the product design life will be reduced proportionally.

|                  |   |
|------------------|---|
| <b>Standards</b> | AS/NZS 60598.1<br>AS/NZS 60598.2.2<br>AS/NZS 61347.1<br>AS/NZS 61347.2.13<br>IEC/TR 62778<br>IEC 62031<br>AS/NZS 61535.1<br>AS CISPR 15<br>IEC 62386-102<br>IEC 62386-207 |
|------------------|---|

### WARRANTY

|                                 |                       |
|---------------------------------|-----------------------|
| <b>Commercial Use Warranty</b>  | 5 RTB (Total 5 Years) |
| <b>Warranty Operating Hours</b> | 30000 hrs             |


This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

### DIMENSIONS

|                       |        |
|-----------------------|--------|
| <b>Product Height</b> | 72 mm  |
| <b>Product Length</b> | 595 mm |
| <b>Product Width</b>  | 295 mm |


### LINE DRAWINGS

EV/CURVE/ADV/306

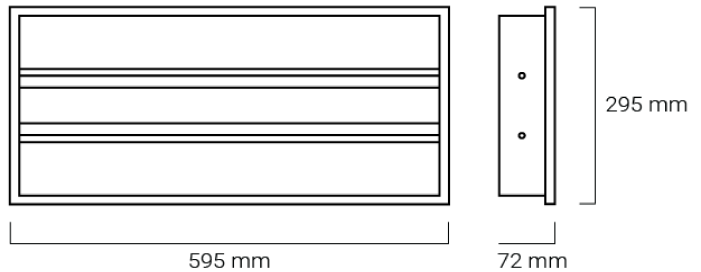

### PHOTOMETRICS

EV/CURVE/ADV/306/15W

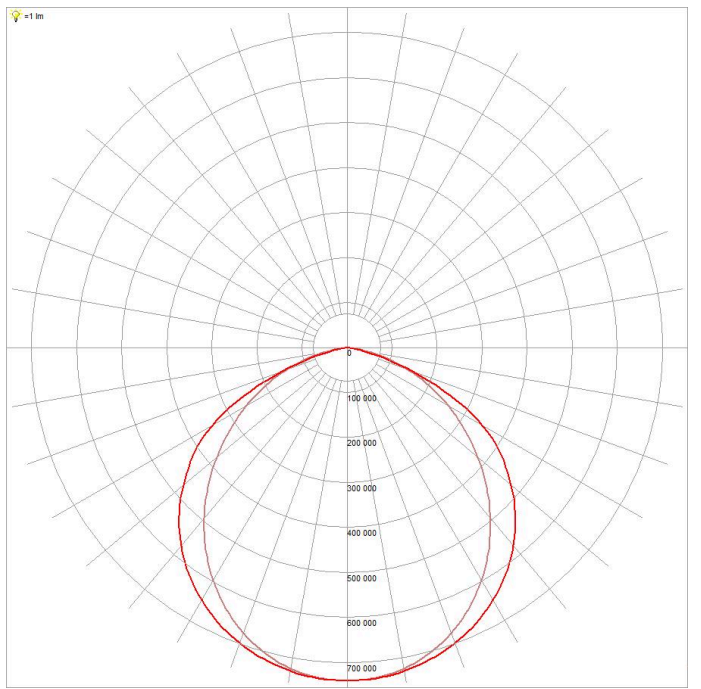


# CURVE ADV

Curve Advanced Troffer, CRI >80

## FEATURES

- Low-glare curved reflector and even light distribution
- External LED driver for easy maintenance and installation
- Supplied with a choice of different softwiring and hardwiring options
- High efficiency design with >150Lm/W output
- Excellent L90B10 lifetime for energy efficient lighting designs
- Flicker free DALI-2 certified LED driver giving excellent compatibility

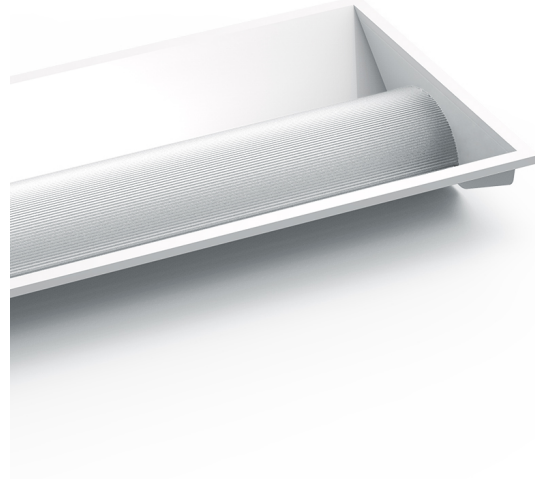

| ORDERING INFORMATION   |   |
|--|---|
| Order code   | 13550   |
| Description  | 15W Curve Adv Troffer<br>300x600mm - 4000K - DALI -<br>Wire by Click Plug |
| Driver Type  | DALI DT6 LED Driver   |
| DALI DT6 ~ Includes DALI-2 Driver with full support for DT6 allowing flicker free dimming with compliant DALI-2 Application controllers. |   |
| Item Code  | EV-CURVE-ADV-306-15W-DW   |

| MECHANICAL        |                   |
|-------------------|-------------------|
| Body Material     | Cold rolled steel |
| Diffuser Material | PMMA              |
| Product Finish    | Powder coated     |
| Fitting Colour    | White             |
| Installation Type | Recessed          |
| IP Rating         | IP40              |

| ELECTRICAL  |          |
|---|----------|
| Electrical Rating   | Class II |
| Input Current   | 0.08 A   |
| Input Frequency   | 50 Hz    |
| Input voltage   | 230Vac   |
| In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6% |          |
| Maximum Wattage   | 15 W     |
| Power Factor  | 0.95     |

|                    |            |
|--------------------|------------|
| Switch Type        | Via DALI   |
| Working Temp Range | 0 to 40 °C |

| LAMP  |                        |
|---|------------------------|
| Macadam Steps (SDCM)  | 4-step MacAdam Ellipse |
| CCT Configuration   | Single                 |
| CRI   | >80                    |
| Lamp/LED Current  | 400 mA                 |
| Lamp/LED voltage  | 36 V                   |
| System Efficiency   | 139 lm/W               |
| UGR   | <19                    |
| UGR (Unified Glare Rating) is reported as per AS/NZS 1680.2 using the following design parameters; room reflectance 0.7/0.5/0.2 (C/W/F), ceiling height 2.7m, LLF=0.8 (Nominal) from the corrected UGR table. |                        |

| LED LIFETIME  |             |             |
|---|-------------|-------------|
| LED Lifetime  | >54,000 hrs |             |
| This is the Reported LED Lifetime in Hours based on TM-21. Ektor does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below. |             |             |
| Ambient Temp (°C)   | 25 °C       | 40 °C       |
| L90B10  | 53,000 hrs  | 53,000 hrs  |
| L80B10  | >54,000 hrs | >54,000 hrs |
| L70B10  | >54,000 hrs | >54,000 hrs |

This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the proceeding number gives the resultant lumen output at the end of it reported lifetime. L70, would mean 30% lumen depreciation which means 70% of its initial output and is tested accordingly to TM-21. The B part refers to failures, which can be define as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers



to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime, the system will reach the defined lumen depreciation and the average led failures is defined by the B rating. The B rating is defined in and tested to IEC62717.

|                         |          |
|-------------------------|----------|
| <b>TM-21 Test Hours</b> | 9000 hrs |
|-------------------------|----------|

### COLOUR TEMPERATURE

|                         |         |
|-------------------------|---------|
| <b>CCT</b>              | 4000 K  |
| <b>Luminaire Lumens</b> | 2080 lm |

All photometric data has a tolerance of  $\pm 10\%$ . Luminaire lumens refers to the exit lumens or delivered lumens from the luminaire.

### DRIVER

|                          |                     |
|--------------------------|---------------------|
| <b>Dimmable</b>          | Yes                 |
| <b>Driver Included</b>   | Yes                 |
| <b>Integrated Driver</b> | No                  |
| <b>Driver Mode</b>       | Constant Current    |
| <b>Driver Type</b>       | DALI DT6 LED Driver |

DALI DT6 ~ Includes DALI-2 Driver with full support for DT6 allowing flicker free dimming with compliant DALI-2 Application controllers.

|                                       |                  |
|---------------------------------------|------------------|
| <b>Flex &amp; Plug or Lead Length</b> | 2400 mm          |
| <b>Wiring Type</b>                    | WBC Plug (5 pin) |

WBC ~ Supplied with a Wire by click- 5 pin plug, model number LA1025/5

### COMPLIANCE

|                            |         |
|----------------------------|---------|
| <b>Product Design Life</b> | 8 years |
|----------------------------|---------|

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

|                  |        |
|------------------|--------|
| <b>Daily Use</b> | 16 hrs |
|------------------|--------|

The Daily Use is the recommended time required to meet the product's design life. Installations can exceed this time, however the product design life will be reduced proportionally.

|                  |   |
|------------------|---|
| <b>Standards</b> | AS/NZS 60598.1<br>AS/NZS 60598.2.2<br>AS/NZS 61347.1<br>AS/NZS 61347.2.13<br>IEC/TR 62778<br>IEC 62031<br>AS/NZS 61535.1<br>AS CISPR 15<br>IEC 62386-102<br>IEC 62386-207 |
|------------------|---|

### WARRANTY

|                                 |                       |
|---------------------------------|-----------------------|
| <b>Commercial Use Warranty</b>  | 5 RTB (Total 5 Years) |
| <b>Warranty Operating Hours</b> | 30000 hrs             |


This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

### DIMENSIONS

|                       |        |
|-----------------------|--------|
| <b>Product Height</b> | 72 mm  |
| <b>Product Length</b> | 595 mm |
| <b>Product Width</b>  | 295 mm |


### LINE DRAWINGS

EV/CURVE/ADV/306

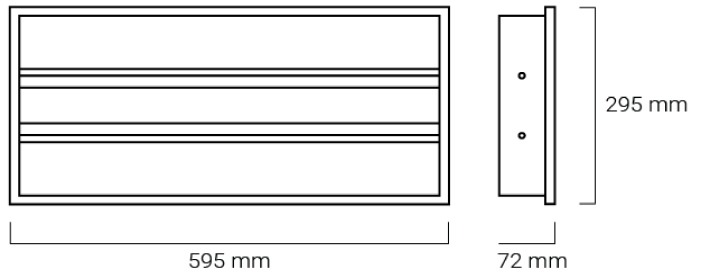

### PHOTOMETRICS

EV/CURVE/ADV/306/15W

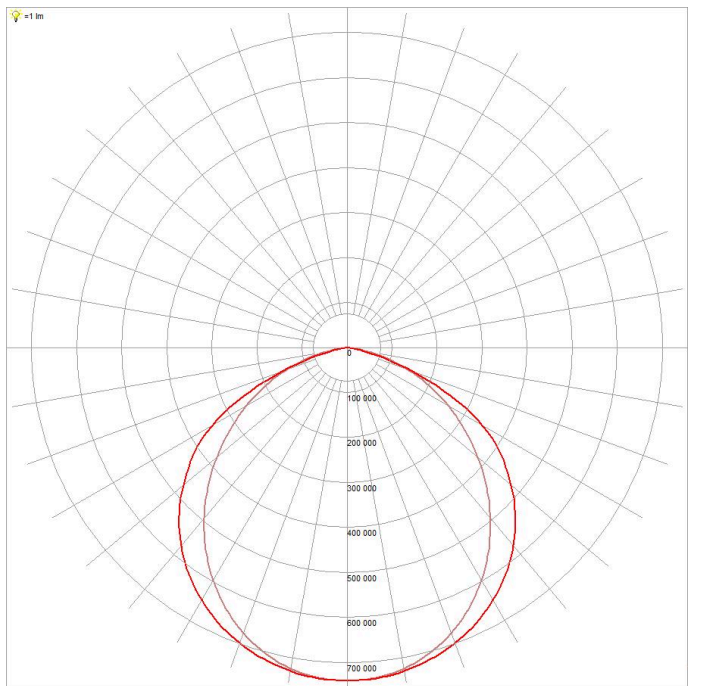


# CURVE ADV

Curve Advanced Troffer, CRI >80

## FEATURES

- Low-glare curved reflector and even light distribution
- External LED driver for easy maintenance and installation
- Supplied with a choice of different softwiring and hardwiring options
- High efficiency design with >150Lm/W output
- Excellent L90B10 lifetime for energy efficient lighting designs
- Flicker free DALI-2 certified LED driver giving excellent compatibility

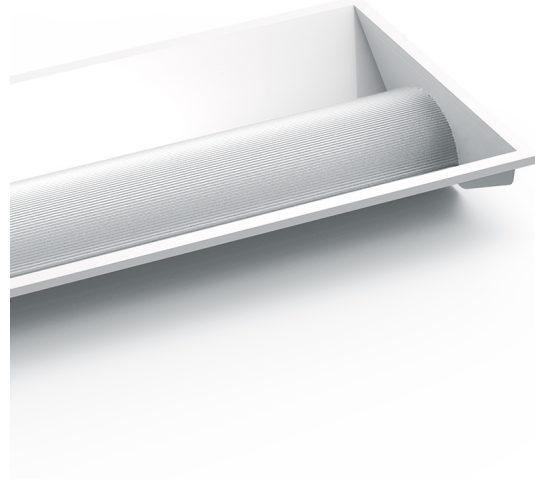

| ORDERING INFORMATION   |   |
|--|---|
| Order code   | 13796   |
| Description  | 17W Curve Adv Troffer<br>300x600mm - 4000K - DALI |
| Driver Type  | DALI DT6 LED Driver                               |
| DALI DT6 ~ Includes DALI-2 Driver with full support for DT6 allowing flicker free dimming with compliant DALI-2 Application controllers. |   |
| Item Code  | EV-CURVE-ADV-306-17W-DA                           |

| MECHANICAL        |                   |
|-------------------|-------------------|
| Body Material     | Cold rolled steel |
| Diffuser Material | PMMA              |
| Product Finish    | Powder coated     |
| Fitting Colour    | White             |
| Installation Type | Recessed          |
| IP Rating         | IP40              |

| ELECTRICAL  |          |
|---|----------|
| Electrical Rating   | Class II |
| Input Current   | 0.09 A   |
| Input Frequency   | 50 Hz    |
| Input voltage   | 230Vac   |
| In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6% |          |
| Maximum Wattage   | 16.7 W   |
| Power Factor  | 0.95     |
| Switch Type   | Via DALI |

|                    |            |
|--------------------|------------|
| Working Temp Range | 0 to 40 °C |
|--------------------|------------|

| LAMP  |                        |
|---|------------------------|
| Macadam Steps (SDCM)  | 4-step MacAdam Ellipse |
| CCT Configuration   | Single                 |
| CRI   | >80                    |
| Lamp/LED Current  | 450 mA                 |
| Lamp/LED voltage  | 36 V                   |
| System Efficiency   | 135 lm/W               |
| UGR   | <19                    |
| UGR (Unified Glare Rating) is reported as per AS/NZS 1680.2 using the following design parameters; room reflectance 0.7/0.5/0.2 (C/W/F), ceiling height 2.7m, LLF=0.8 (Nominal) from the corrected UGR table. |                        |

| LED LIFETIME  |             |             |
|---|-------------|-------------|
| LED Lifetime  | >54,000 hrs |             |
| This is the Reported LED Lifetime in Hours based on TM-21. Ektor does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below. |             |             |
| Ambient Temp (°C)   | 25 °C       | 40 °C       |
| L90B10  | 53,000 hrs  | 53,000 hrs  |
| L80B10  | >54,000 hrs | >54,000 hrs |
| L70B10  | >54,000 hrs | >54,000 hrs |

This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the proceeding number gives the resultant lumen output at the end of it reported lifetime. L70, would mean 30% lumen depreciation which means 70% of its initial output and is tested accordingly to TM-21. The B part refers to failures, which can be define as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime, the system will reach the defined lumen depreciation and the average led



failures is defined by the B rating. The B rating is defined in and tested to IEC62717.

|                         |          |
|-------------------------|----------|
| <b>TM-21 Test Hours</b> | 9000 hrs |
|-------------------------|----------|

### COLOUR TEMPERATURE

|                         |         |
|-------------------------|---------|
| <b>CCT</b>              | 4000 K  |
| <b>Luminaire Lumens</b> | 2260 lm |

All photometric data has a tolerance of  $\pm 10\%$ . Luminaire lumens refers to the exit lumens or delivered lumens from the luminaire.

### DRIVER

|                          |                     |
|--------------------------|---------------------|
| <b>Dimmable</b>          | Yes                 |
| <b>Driver Included</b>   | Yes                 |
| <b>Integrated Driver</b> | No                  |
| <b>Driver Mode</b>       | Constant Current    |
| <b>Driver Type</b>       | DALI DT6 LED Driver |

DALI DT6 ~ Includes DALI-2 Driver with full support for DT6 allowing flicker free dimming with compliant DALI-2 Application controllers.

|                    |                                    |
|--------------------|------------------------------------|
| <b>Wiring Type</b> | Re-wireable terminal block (4 pin) |
|--------------------|------------------------------------|

### COMPLIANCE

|                            |         |
|----------------------------|---------|
| <b>Product Design Life</b> | 8 years |
|----------------------------|---------|

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

|                  |        |
|------------------|--------|
| <b>Daily Use</b> | 16 hrs |
|------------------|--------|

The Daily Use is the recommended time required to meet the product's design life. Installations can exceed this time, however the product design life will be reduced proportionally.

|                  |   |
|------------------|---|
| <b>Standards</b> | AS/NZS 60598.1<br>AS/NZS 60598.2.2<br>AS/NZS 61347.1<br>AS/NZS 61347.2.13<br>IEC/TR 62778<br>IEC 62031<br>AS CISPR 15<br>IEC 62386-102<br>IEC 62386-207 |
|------------------|---|

### WARRANTY

|                                 |                       |
|---------------------------------|-----------------------|
| <b>Commercial Use Warranty</b>  | 5 RTB (Total 5 Years) |
| <b>Warranty Operating Hours</b> | 30000 hrs             |


This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

### DIMENSIONS

|                       |        |
|-----------------------|--------|
| <b>Product Height</b> | 72 mm  |
| <b>Product Length</b> | 595 mm |
| <b>Product Width</b>  | 295 mm |

### LINE DRAWINGS

EV/CURVE/ADV/306

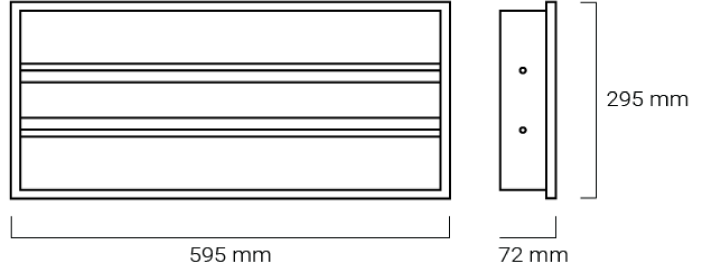




# CURVE ADV

Curve Advanced Troffer, CRI >80

## FEATURES

- Low-glare curved reflector and even light distribution
- External LED driver for easy maintenance and installation
- Supplied with a choice of different softwiring and hardwiring options
- High efficiency design with >150Lm/W output
- Excellent L90B10 lifetime for energy efficient lighting designs
- Flicker free DALI-2 certified LED driver giving excellent compatibility

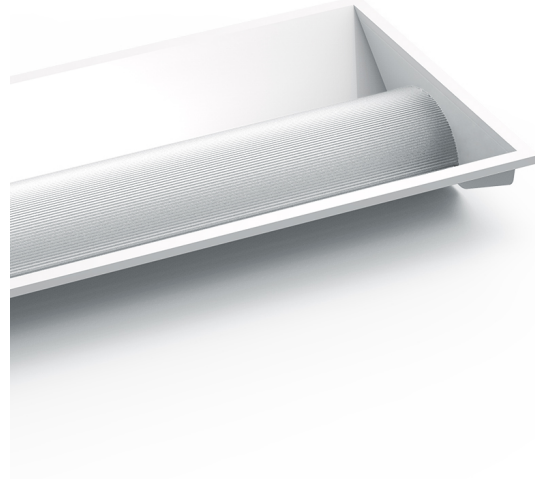

| ORDERING INFORMATION   |  |
|--|--|
| Order code   | 13797  |
| Description  | 17W Curve Adv Troffer<br>300x600mm - 4000K - DALI - CMS Plug |
| Driver Type  | DALI DT6 LED Driver  |
| DALI DT6 ~ Includes DALI-2 Driver with full support for DT6 allowing flicker free dimming with compliant DALI-2 Application controllers. |  |
| Item Code  | EV-CURVE-ADV-306-17W-DC                                      |

| MECHANICAL        |                   |
|-------------------|-------------------|
| Body Material     | Cold rolled steel |
| Diffuser Material | PMMA              |
| Product Finish    | Powder coated     |
| Fitting Colour    | White             |
| Installation Type | Recessed          |
| IP Rating         | IP40              |

| ELECTRICAL  |          |
|---|----------|
| Electrical Rating   | Class II |
| Input Current   | 0.09 A   |
| Input Frequency   | 50 Hz    |
| Input voltage   | 230Vac   |
| In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6% |          |
| Maximum Wattage   | 16.7 W   |
| Power Factor  | 0.95     |

|                    |            |
|--------------------|------------|
| Switch Type        | Via DALI   |
| Working Temp Range | 0 to 40 °C |

| LAMP  |                        |
|---|------------------------|
| Macadam Steps (SDCM)  | 4-step MacAdam Ellipse |
| CCT Configuration   | Single                 |
| CRI   | >80                    |
| Lamp/LED Current  | 450 mA                 |
| Lamp/LED voltage  | 36 V                   |
| System Efficiency   | 135 lm/W               |
| UGR   | <19                    |
| UGR (Unified Glare Rating) is reported as per AS/NZS 1680.2 using the following design parameters; room reflectance 0.7/0.5/0.2 (C/W/F), ceiling height 2.7m, LLF=0.8 (Nominal) from the corrected UGR table. |                        |

| LED LIFETIME  |             |             |
|---|-------------|-------------|
| LED Lifetime  | >54,000 hrs |             |
| This is the Reported LED Lifetime in Hours based on TM-21. Ektor does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below. |             |             |
| Ambient Temp (°C)   | 25 °C       | 40 °C       |
| L90B10  | 53,000 hrs  | 53,000 hrs  |
| L80B10  | >54,000 hrs | >54,000 hrs |
| L70B10  | >54,000 hrs | >54,000 hrs |

This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the proceeding number gives the resultant lumen output at the end of it reported lifetime. L70, would mean 30% lumen depreciation which means 70% of its initial output and is tested accordingly to TM-21. The B part refers to failures, which can be define as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers



to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime, the system will reach the defined lumen depreciation and the average led failures is defined by the B rating. The B rating is defined in and tested to IEC62717.

|                         |          |
|-------------------------|----------|
| <b>TM-21 Test Hours</b> | 9000 hrs |
|-------------------------|----------|

## COLOUR TEMPERATURE

|            |        |
|------------|--------|
| <b>CCT</b> | 4000 K |
|------------|--------|

|                         |         |
|-------------------------|---------|
| <b>Luminaire Lumens</b> | 2260 lm |
|-------------------------|---------|

All photometric data has a tolerance of  $\pm 10\%$ . Luminaire lumens refers to the exit lumens or delivered lumens from the luminaire.

## DRIVER

|                 |     |
|-----------------|-----|
| <b>Dimmable</b> | Yes |
|-----------------|-----|

|                        |     |
|------------------------|-----|
| <b>Driver Included</b> | Yes |
|------------------------|-----|

|                          |    |
|--------------------------|----|
| <b>Integrated Driver</b> | No |
|--------------------------|----|

|                    |                  |
|--------------------|------------------|
| <b>Driver Mode</b> | Constant Current |
|--------------------|------------------|

|                    |                     |
|--------------------|---------------------|
| <b>Driver Type</b> | DALI DT6 LED Driver |
|--------------------|---------------------|

DALI DT6 ~ Includes DALI-2 Driver with full support for DT6 allowing flicker free dimming with compliant DALI-2 Application controllers.

|                                       |         |
|---------------------------------------|---------|
| <b>Flex &amp; Plug or Lead Length</b> | 2400 mm |
|---------------------------------------|---------|

|                    |                  |
|--------------------|------------------|
| <b>Wiring Type</b> | CMS Plug (5 pin) |
|--------------------|------------------|

CMS ~ Supplied with a CMS Electracom- 5 pin plug to suit QF series wiring, model number QFP3AT

## COMPLIANCE

|                            |         |
|----------------------------|---------|
| <b>Product Design Life</b> | 8 years |
|----------------------------|---------|

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

|                  |        |
|------------------|--------|
| <b>Daily Use</b> | 16 hrs |
|------------------|--------|

The Daily Use is the recommended time required to meet the product's design life. Installations can exceed this time, however the product design life will be reduced proportionally.

|                  |   |
|------------------|---|
| <b>Standards</b> | AS/NZS 60598.1<br>AS/NZS 60598.2.2<br>AS/NZS 61347.1<br>AS/NZS 61347.2.13<br>IEC/TR 62778<br>IEC 62031<br>AS/NZS 61535.1<br>AS CISPR 15<br>IEC 62386-102<br>IEC 62386-207 |
|------------------|---|

## WARRANTY

|                                |                       |
|--------------------------------|-----------------------|
| <b>Commercial Use Warranty</b> | 5 RTB (Total 5 Years) |
|--------------------------------|-----------------------|

|                                 |           |
|---------------------------------|-----------|
| <b>Warranty Operating Hours</b> | 30000 hrs |
|---------------------------------|-----------|

This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

## DIMENSIONS


|                       |       |
|-----------------------|-------|
| <b>Product Height</b> | 72 mm |
|-----------------------|-------|

|                       |        |
|-----------------------|--------|
| <b>Product Length</b> | 595 mm |
|-----------------------|--------|

|                      |        |
|----------------------|--------|
| <b>Product Width</b> | 295 mm |
|----------------------|--------|

## LINE DRAWINGS

EV/CURVE/ADV/306

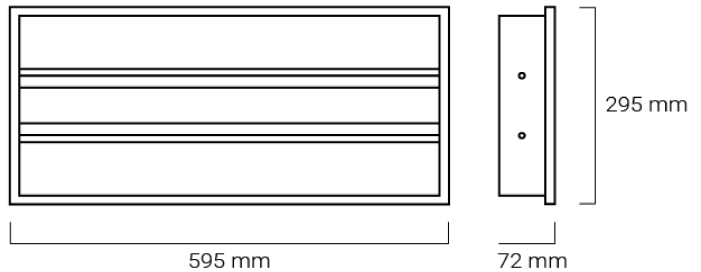


# CURVE ADV

Curve Advanced Troffer, CRI >80

## FEATURES

- Low-glare curved reflector and even light distribution
- External LED driver for easy maintenance and installation
- Supplied with a choice of different softwiring and hardwiring options
- High efficiency design with >150Lm/W output
- Excellent L90B10 lifetime for energy efficient lighting designs
- Flicker free DALI-2 certified LED driver giving excellent compatibility

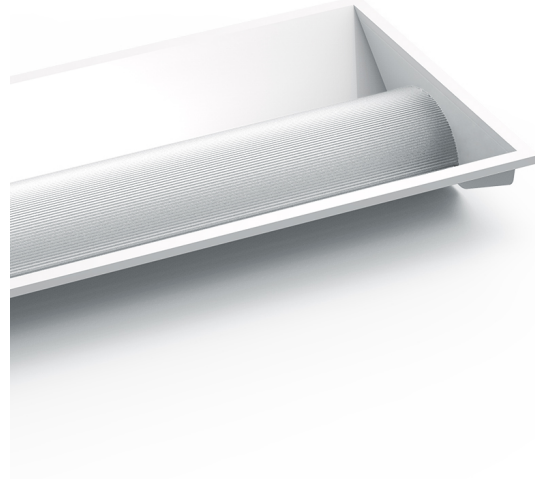

| ORDERING INFORMATION   |   |
|--|---|
| Order code   | 13798   |
| Description  | 17W Curve Adv Troffer<br>300x600mm - 4000K - DALI -<br>Wire by Click Plug |
| Driver Type  | DALI DT6 LED Driver   |
| DALI DT6 ~ Includes DALI-2 Driver with full support for DT6 allowing flicker free dimming with compliant DALI-2 Application controllers. |   |
| Item Code  | EV-CURVE-ADV-306-17W-DW   |

| MECHANICAL        |                   |
|-------------------|-------------------|
| Body Material     | Cold rolled steel |
| Diffuser Material | PMMA              |
| Product Finish    | Powder coated     |
| Fitting Colour    | White             |
| Installation Type | Recessed          |
| IP Rating         | IP40              |

| ELECTRICAL  |          |
|---|----------|
| Electrical Rating   | Class II |
| Input Current   | 0.09 A   |
| Input Frequency   | 50 Hz    |
| Input voltage   | 230Vac   |
| In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6% |          |
| Inrush Current  | 0.09 A   |
| Maximum Wattage   | 16.7 W   |

|                    |            |
|--------------------|------------|
| Power Factor       | 0.95       |
| Switch Type        | Via DALI   |
| Working Temp Range | 0 to 40 °C |

| LAMP  |                        |
|---|------------------------|
| Macadam Steps (SDCM)  | 4-step MacAdam Ellipse |
| CCT Configuration   | Single                 |
| CRI   | >80                    |
| Lamp/LED Current  | 450 mA                 |
| Lamp/LED voltage  | 36 V                   |
| System Efficiency   | 135 lm/W               |
| UGR   | <19                    |
| UGR (Unified Glare Rating) is reported as per AS/NZS 1680.2 using the following design parameters; room reflectance 0.7/0.5/0.2 (C/W/F), ceiling height 2.7m, LLF=0.8 (Nominal) from the corrected UGR table. |                        |

| LED LIFETIME  |             |             |
|---|-------------|-------------|
| LED Lifetime  | >54,000 hrs |             |
| This is the Reported LED Lifetime in Hours based on TM-21. Ektor does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below. |             |             |
| Ambient Temp (°C)   | 25 °C       | 40 °C       |
| L90B10  | 53,000 hrs  | 53,000 hrs  |
| L80B10  | >54,000 hrs | >54,000 hrs |
| L70B10  | >54,000 hrs | >54,000 hrs |

This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the proceeding number gives the resultant lumen output at the end of it reported lifetime. L70, would mean 30% lumen depreciation which means 70% of its initial output and is tested accordingly to



TM-21. The B part refers to failures, which can be define as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime, the system will reach the defined lumen depreciation and the average led failures is defined by the B rating. The B rating is defined in and tested to IEC62717.

**TM-21 Test Hours** 9000 hrs

### COLOUR TEMPERATURE

**CCT** 4000 K

**Luminaire Lumens** 2260 lm

All photometric data has a tolerance of  $\pm 10\%$ . Luminaire lumens refers to the exit lumens or delivered lumens from the luminaire.

### DRIVER

**Dimmable** Yes

**Driver Included** Yes

**Integrated Driver** No

**Driver Mode** Constant Current

**Driver Type** DALI DT6 LED Driver

DALI DT6 ~ Includes DALI-2 Driver with full support for DT6 allowing flicker free dimming with compliant DALI-2 Application controllers.

**Flex & Plug or Lead Length** 2400 mm

**Wiring Type** WBC Plug (5 pin)

WBC ~ Supplied with a Wire by click- 5 pin plug, model number LA1025/5

### COMPLIANCE

**Product Design Life** 8 years

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

**Daily Use** 16 hrs

The Daily Use is the recommended time required to meet the product's design life. Installations can exceed this time, however the product design life will be reduced proportionally.

**Standards**  
 AS/NZS 60598.1  
 AS/NZS 60598.2.2  
 AS/NZS 61347.1  
 AS/NZS 61347.2.13  
 IEC/TR 62778  
 IEC 62031  
 AS/NZS 61535.1  
 AS CISPR 15  
 IEC 62386-102  
 IEC 62386-207

### WARRANTY

**Commercial Use Warranty** 5 RTB (Total 5 Years)

**Warranty Operating Hours** 30000 hrs

This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

### DIMENSIONS

**Product Height** 72 mm

**Product Length** 595 mm

**Product Width** 295 mm

### LINE DRAWINGS

EV/CURVE/ADV/306

