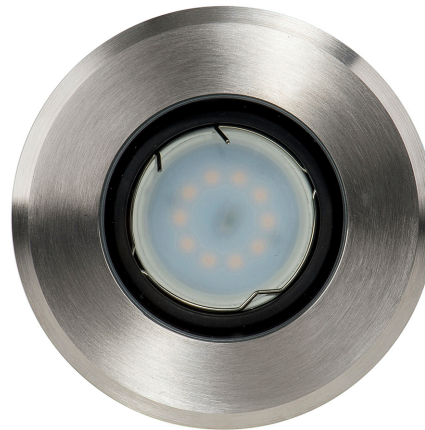# 316 Stainless Steel Round Adjustable Inground Lights
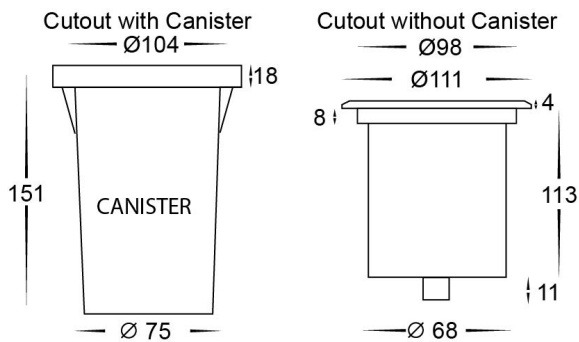
Havit Lighting

PRODUCT SPECIFICATIONS

Name: Luta Round

Material: 316 Stainless Steel + aluminium

Colour: Stainless Steel

Tilt: 30º

IP Rating: IP67

IK Rating: IK10

Trafficable: 500kg

Lamp Base: MR16

CRI: ≥80

Cable Length: 300mm

Wiring: Parallel

Dimmable: No

Warranty: 2 Years Replacement**

12v DC (HV9507) 24v DC (HV9508)

Compatible with Tri-Colour 9in1 3w, 5w, 7w 12v or 24v LED Globe

DIMENSIONS

Cutout with Canister
Ø104
18
151
CANISTER
Ø 75

Cutout without Canister
Ø98
Ø111
8
4
113
11
Ø 68

APPROVALS

IP RATING

IP67 INDOOR/OUTDOOR WEATHERPROOF

COLOUR TEMPERATURE

Tri-Colour By Havit
3000K
4000K
5500K

INSTALLATION WITH ADEQUATE DRAINAGE

Slight decline on Ground level to allow for water to run away from fitting

Ground Level

Light Fitting

Canister 100mm Space

100mm - 150mm of Crushed Rock
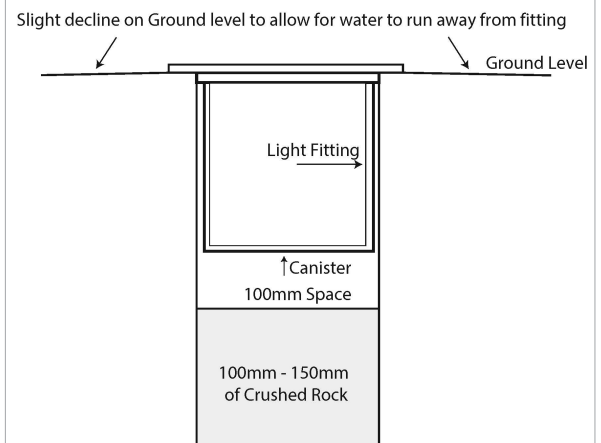
Product Ordering

IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	BEAM ANGLE	INCLUDED LED
	HV1825T	3000K 4000K 5500K	270lm 285lm 300lm	12v DC	120°	Tri-Colour 5w MR16 LED

12v DC models must be used with suitable 12v DC LED Driver

* Lumen output measured at source
** See Warranty Terms and Conditions for more information

For more information contact Havit Lighting
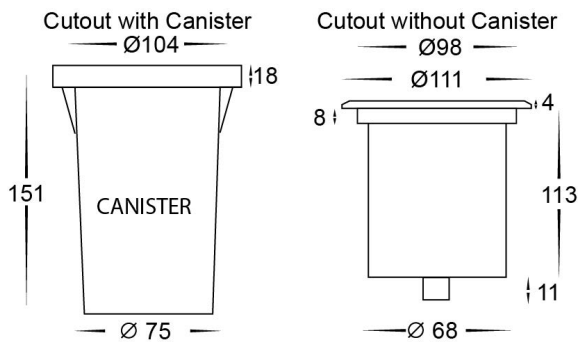
Havit Lighting

PRODUCT SPECIFICATIONS

Name: Luta Square

Material: 316 Stainless Steel + aluminium

Colour: Stainless Steel

Tilt: 30º

IP Rating: IP67

IK Rating: IK10

Trafficable: 500kg

Lamp Base: MR16

CRI: ≥80

Cable Length: 300mm

Wiring: Parallel

Dimmable: No

Warranty: 2 Years Replacement**

12v DC — HV9507
24v DC — HV9508

Compatible with Tri-Colour 9in1 3w, 5w, 7w 12v or 24v LED Globe

DIMENSIONS

Cutout with Canister
Ø 104
18
151
CANISTER
Ø 75

Cutout without Canister
Ø 98
Ø 111
8
4
113
11
Ø 68

APPROVALS

IP RATING

IP67 INDOOR/OUTDOOR WEATHERPROOF

COLOUR TEMPERATURE

Tri-Colour By Havit
3000K
4000K
5500K

INSTALLATION WITH ADEQUATE DRAINAGE

Slight decline on Ground level to allow for water to run away from fitting

Ground Level

Light Fitting

Canister
100mm Space

100mm - 150mm of Crushed Rock
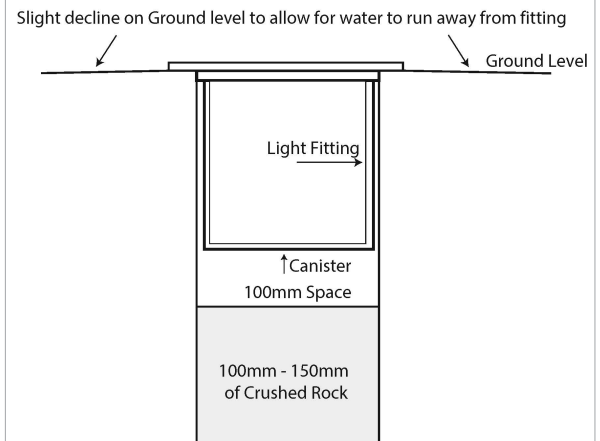
Product Ordering

IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	BEAM ANGLE	INCLUDED LED
	HV1825T-SQ	3000K 4000K 5500K	270lm 285lm 300lm	12v DC	120°	**Tri-Colour** 5w MR16 LED

12v DC models must be used with suitable 12v DC LED Driver

* Lumen output measured at source
** See Warranty Terms and Conditions for more information