Last modification

2022-11-02

Telbix.

LUC SP8-BK83-826 9329501056516



The LUC spike is a directional spot LED luminaire.

This flexible lamp is simple, functional, and available in 3 sizes. Its alignment can be easily adjusted with the flexible swivel. The LUC spike is the ideal choice for highlighting trees, flower beds, facades, sculptures, etc. in all outdoor areas in the dark. With an operating voltage of 8~26 volt and a water-protected rating of IP65, it is a versatile and safe lighting solution for outdoor areas. Other fixtures in the LUC series can be combined to form a complete outdoor space solution.

A 12 or 24 volt AC transformer is recommended to power up this fixture.

Overview

Family name	Luc
Categories	Spike Lights
Mounting	Recess
Usage	Outdoor Lighting,Trade Selection

Color / Material

Fixture Color	Black,Clear
Fixture Material	Metal,Polycarbonate
Diffuser Material	Polycarbonate
Diffuser Color	Clear

5.6 37.0

Size

Fixture Diameter (cm)	
Fixture Height (cm)	

Specification

Voltage Input	12-24V
Wattage (max)	8
Globe Type	LED integrated COB
Globe / Light Source qty	1
Globe / Light Source included	Yes
Lumens	700
Color Temperature	Warm White
Color Kelvin	3000k

Telbıx.


>84
No
32
IP65
RCM
Instruction
Yes (by Licensed Electrician only)
Do not use strong liquid cleaners,Wipe clean with a dry cloth
*3 Years

<u>Barcode</u>

GTIN

9329501056516

Image -dimensions

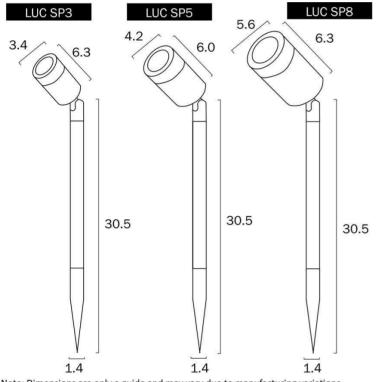

Note: Dimensions are only a guide and may vary due to manufacturing variations.

Telbıx.





Last modification

2022-11-02

LUC SP3-BK83-826 9329501054284



The LUC spike is a directional spot LED luminaire.

This flexible lamp is simple, functional, and available in 3 sizes. Its alignment can be easily adjusted with the flexible swivel. The LUC spike is the ideal choice for highlighting trees, flower beds, facades, sculptures, etc. in all outdoor areas in the dark. With an operating voltage of 8~26 volt and a water-protected rating of IP65, it is a versatile and safe lighting solution for outdoor areas. Other fixtures in the LUC series can be combined to form a complete outdoor space solution.

A 12 or 24 volt AC transformer is recommended to power up this fixture.

Overview

Family name	Luc
Categories	Spike Lights
Mounting	Recess
Usage	Outdoor Lighting,Trade Selection
-	

Color / Material

te

3.3 36.0

Size

Fixture Diameter (cm)	
Fixture Height (cm)	

Specification

Voltage Input	12-24V
Wattage (max)	3
Globe Type	LED integrated COB
Globe / Light Source qty	1
Globe / Light Source included	Yes
Lumens	280
Color Temperature	Warm White
Color Kelvin	3000k

All representations within this document are subject to copyright. ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000. NOTE : All images , descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation

Telbix.

Telbıx.


>84
No
36
IP65
RCM
Instruction
Yes (by Licensed Electrician only)
Do not use strong liquid cleaners,Wipe clean with a dry cloth
*3 Years

<u>Barcode</u>

GTIN

9329501054284

Image -dimensions

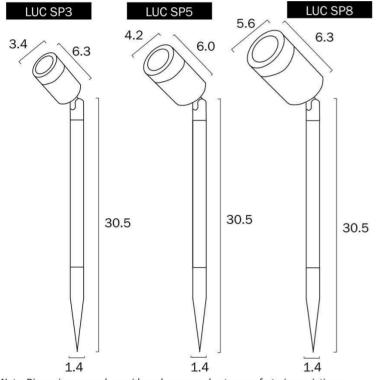



Telbıx.



Telbıx.



Last modification

2022-11-02

LUC SP5-BK83-826 9329501054291



The LUC spike is a directional spot LED luminaire.

This flexible lamp is simple, functional, and available in 3 sizes. Its alignment can be easily adjusted with the flexible swivel. The LUC spike is the ideal choice for highlighting trees, flower beds, facades, sculptures, etc. in all outdoor areas in the dark. With an operating voltage of 8~26 volt and a water-protected rating of IP65, it is a versatile and safe lighting solution for outdoor areas. Other fixtures in the LUC series can be combined to form a complete outdoor space solution.

A 12 or 24 volt AC transformer is recommended to power up this fixture.

Overview

Family name	Luc
Categories	Spike Lights
Mounting	Recess
Usage	Outdoor Lighting,Trade Selection

Color / Material

Fixture Color	Black,Clear
Fixture Material	Metal,Polycarbonate
Diffuser Material	Polycarbonate
Diffuser Color	Clear

4.2 36.5

Size

Fixture Diameter (cm)	
Fixture Height (cm)	

Specification

Voltage Input	12-24V
Wattage (max)	5
Globe Type	LED integrated COB
Globe / Light Source qty	1
Globe / Light Source included	Yes
Lumens	450
Color Temperature	Warm White
Color Kelvin	3000k

All representations within this document are subject to copyright. ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000. NOTE : All images , descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation

Telbix.

Telbıx.


>84
No
22
IP65
RCM
Instruction
Yes (by Licensed Electrician only)
Do not use strong liquid cleaners,Wipe clean with a dry cloth
*3 Years

<u>Barcode</u>

GTIN

9329501054291

Image -dimensions

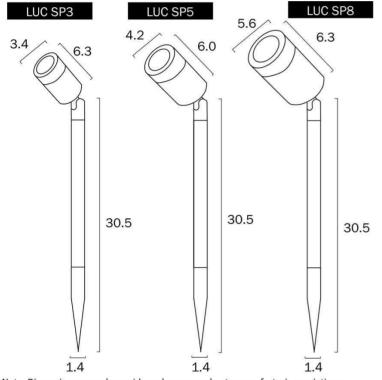

Note: Dimensions are only a guide and may vary due to manufacturing variations.

Telbıx.

