

BAI shower mixers cartridge removal/replacement instructions

1. Using a knife, carefully remove the plastic cover from all handles.



2. Using the alien key (included), unscrew set-screw and remove handles from the thermostatic valve and diverter.



3. For BAI 0112, 0113, 0132, 0133 Only:

Detach hose (use proper tool if needed)



4. For BAI 0112, 0113, 0132, 0133 Only:

Use 3/8" Allen key (not included) to remove the hose outlet.



5. Remove the face plate.



6. Unscrew the trim ring.



7. Pull out the safety plastic ring from the thermostatic valve.



8. Using a small flathead screwdriver and hammer, carefully unscrew the ring nut from the thermostatic valve.



9. Pull out the thermostatic cartridge to replace it or clean it. Pliers might help if it's too tight. Rinse the system out before installing a new or cleaned cartridge.



10. Place the new or cleaned out thermostatic cartridge back. Make sure to match the two white dots on the side. Place back the plastic safety ring, making sure that the two cut-offs are in vertical position.



11. Unscrew the trim ring from the diverter valve.




12. Unscrew the plastic ring.



13. Using wrench unscrew the cartridge cover.



14. Pull out the diverter cartridge to replace it or clean it out.

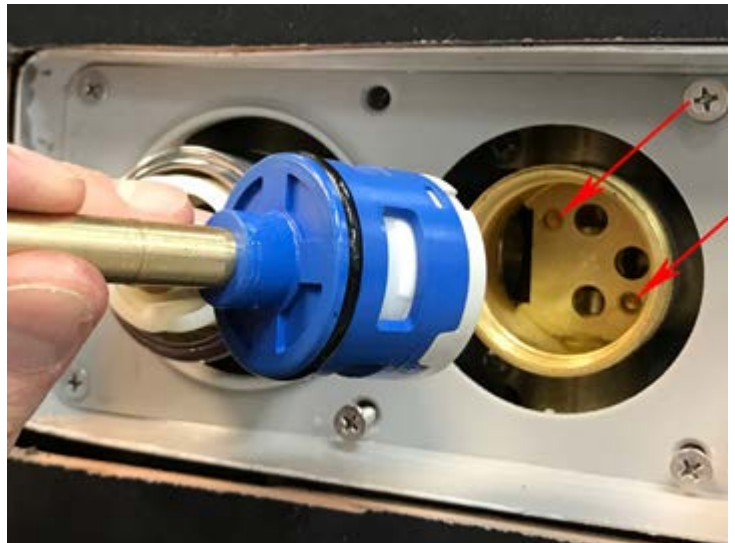

15. Install the diverter cartridge back, making sure that two pins in the back of the cartridge will match with the two nests on the bottom of the valve.

16. Go back to step 13 and work your way back to step 1 to assemble the shower mixer.