



CALF FEEDING SOLUTIONS

Custom made for your farming needs!

"3D-S" Series by



Save time and money by reducing labor...

machine washing instead of hand washing!



"3D-S" Series by



Save time and money by reducing labor... machine washing instead of hand washing!



Dual Screens

Protect intake of pump.

1.5 HP Quick Service Pump

Pump slides forward providing for easier repair.

Swift Plumbing Removal

All plumbing is connected using zero-interference Stainless/Terelene Couplers.

Stainless Steel Air Gap Fill

Eliminates the need for check valves and vacuum breakers.

20.5" Door Clearance

Wash Taller Wares.

Diagonal Scrap Trap

Provides easy screen removal in both corner and pass-through models.

Available Options:

- Convertible Design.
- Stainless Steel Spray Bases, Bayonets and Manifold Couplings.
- Quick release spray arm removal for ease of cleaning.
- Pass-thru outside sump with built-in scrap accumulator.
- Run indicator Light.
- Simple to Clean.
- Solid Chemical Dispensing.
- Stainless Steel Side Table.



Quick Service Pump




Swift Plumbing Removal



Stainless Steel Air Gap Fill



20.5" Door Clearance




Diagonal Scrap Trap



Stainless Bases etc.



Solid Chemical Dispensing

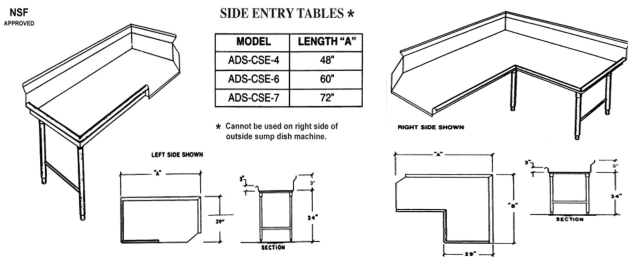

3D-S Specifications:

| FAMILY MODELS | | RACK SIZE | |
|---|---------------------|------------------------|------------------------------|
| AF-3DS | 37 | 19-3/4" x 19-3/4" | 50.2 cm x 50.2 cm |
| AFC-3DS | 45 | 20-3/4" x 20-1/2" | 52.7 cm x 52.1 cm |
| RATED CAPACITY (Racks/Hr.) | 30 | WATER INLET | 1/2" FPT |
| WASH TIME (Sec.) | 15 | DRAIN (Scrap Trap) | 2" Pipe |
| RINSE TIME (Sec.) | 90 | HEIGHT (Door Open) | 80-7/8" |
| DWELL (Sec.) | | HEIGHT (Door Closed) | 205.4 cm |
| TOTAL CYCLE TIME (Sec.) | | WIDTH (Overall) | 70-1/2" |
| WATER TEMPERATURE (Supply) | 120 F Min. | WIDTH (Table to Table) | 179.1 cm |
| | 49 C Min. | DEPTH (Overall) | 33-1/2" |
| WATER CONSUMPTION | 2.2 Gal's Per Cycle | SHIPPING WEIGHT | 85.1 cm |
| | 8.3 Lit's Per Cycle | | 25" |
| MOTOR | 1.5 HP | SHIPPING DIMENSIONS | 63.5 cm |
| | 1.125 KW | | 34-1/2" |
| ELECTRICAL RATINGS | 115 Volts | | 86.9 cm |
| | Single Phase | | 312 lb. |
| Connect to Supply Source using 10-12 AWG copper wires. Circuit Protection: 20 AMP Circuit Breaker or Fuse with a 20 AMP Rating. | | | 141.5 kg |
| | | | 36"L x 36"W x 78"H |
| | | | 91.4 cm x 91.4 cm x 198.1 cm |