




## LEFT HAND HINGE JAMB PATCH PRODUCT SPECIFICATION

Sleeve Travel: 5/8" Max  
Materials: Galvanealed Steel  
Thickness: 16GA, 0.060" Nominal

The Jamb Patch is designed to repair the lower portion of a steel frame used in a masonry opening. The dimensions of the jamb patch coincide with the most common masonry frame used in the United States, i.e. a 5-3/4" masonry frame.

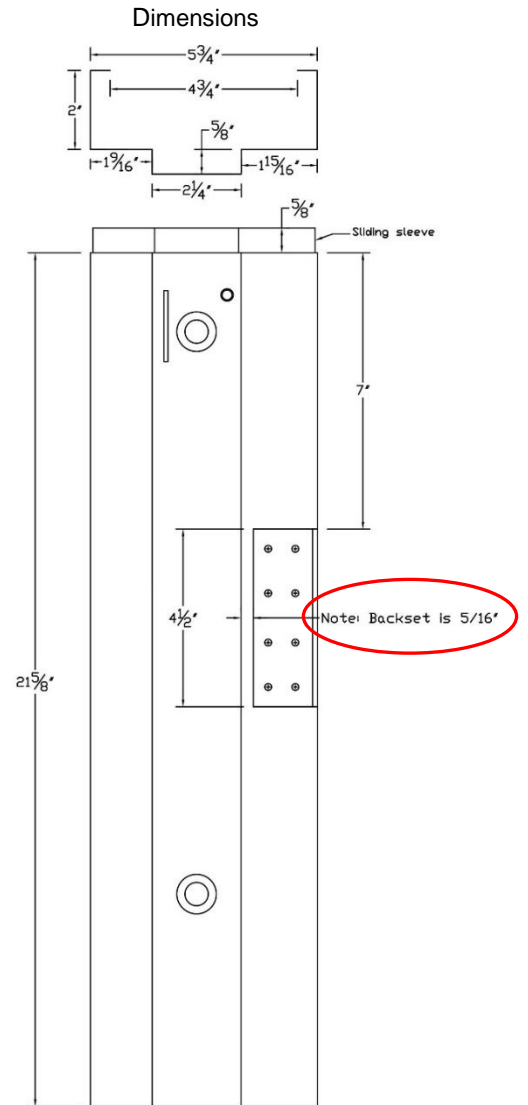

NOTE: THE EXISTING JAMB DIMENSION SHOULD BE CHECKED AGAINST THIS SPECIFICATION  
PRIOR TO USING THE JAMB PATCH PRODUCT.


Door Innovation, 10503 Citation Dr, Brighton, MI 48116  
517-275-6277  
www.jambpatch.com  
www.doorinnovation.com



## STRIKE SIDE JAMB PATCH PRODUCT SPECIFICATION

Sleeve Travel: 5/8" Max Both Ends  
Materials: Galvanealed Steel  
Thickness: 16GA, 0.060" Nominal

The Jamb Patch is designed to repair the lower portion of a steel frame used in a masonry opening. The dimensions of the jamb patch coincide with the most common masonry frame used in the United States, i.e. a 5-3/4" masonry frame.

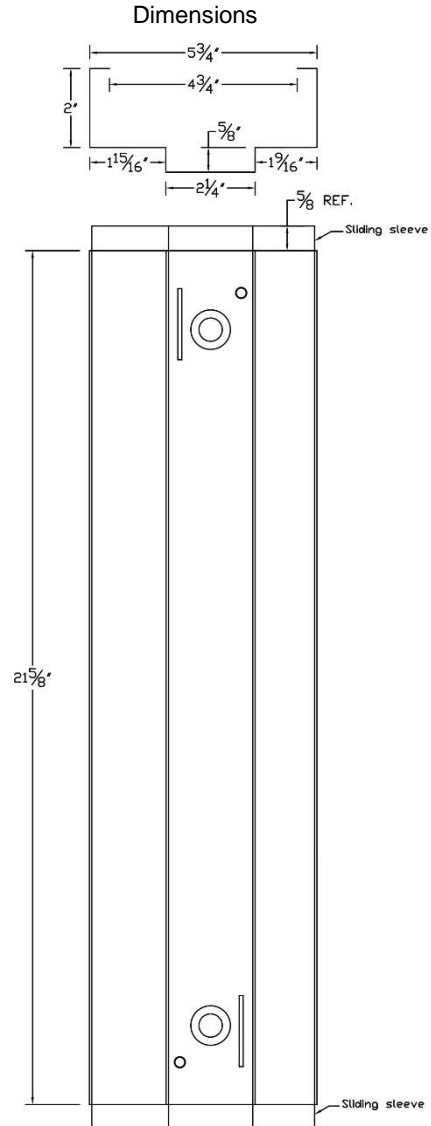

NOTE: THE EXISTING JAMB DIMENSION SHOULD BE CHECKED AGAINST THIS SPECIFICATION PRIOR TO USING THE JAMB PATCH PRODUCT.

Door Innovation, 10503 Citation Dr, Brighton, MI 48116  
517-275-6277  
www.jambpatch.com  
www.doorinnovation.com