

32 Belk Road, Tauranga New Zealand Phone: 027 4751336

Skimmer Filter MK II

The Ultimate Pond Debris Remover



Pond Skimmer Filter Installation

Make sure the skimmer is level side to side & front to back. Make sure the filter mat support is in place when packing with soil





Dry fit the two top corner screws






Clean both the back of the liner and the front of the skimmer box. Put a silione bead around the screw holes on the skimmer and place the liner and weir door assembly against it. (DO NOT put underlay between them) Fit all the screws and screw up tight. Finally cut the liner out from the back. Hint: Leave a fold of loose liner below the skimmer to allow for future





Debris net Weir door

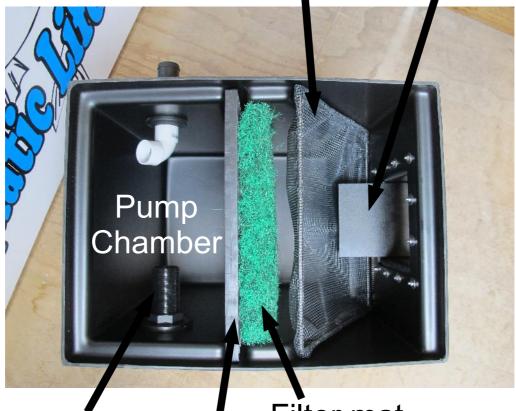


Pump outlet Filter mat Filter mat support

Cut a notch out for pump cable





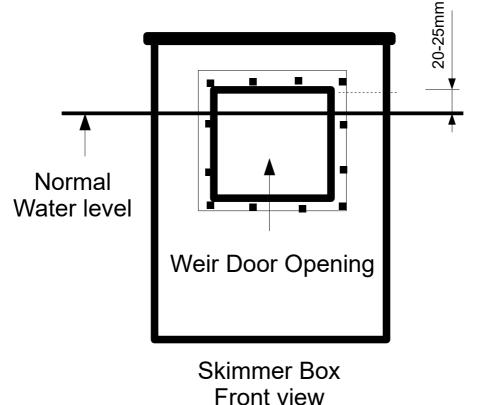

Important: When compacting soil around skimmer box make sure you have the filter support grill in place