



### DESCRIPTION

The JS Series is a single door, 2 master station system. The master station features a 3.5" screen and buttons allowing for door release and monitoring of the door station. The JS master allows for either VOX or PTT communication.

The JS-1MD master station and JS-DA door station are only available in the JSS-1A kit. The JS-1HD sub master station can be added to the kit to expand the system to its maximum capacity of 1 door station and 2 inside answering stations.


### FEATURES

- 3.5" screen
- Slim compact design
- VOX or PTT communication
- Available sub master
- Simple 2 wire connection to door
- 24V DC power supply included

# JSS-1A

## 1 Door Station 1 Master Station Video Kit

### FEATURE CALL-OUT

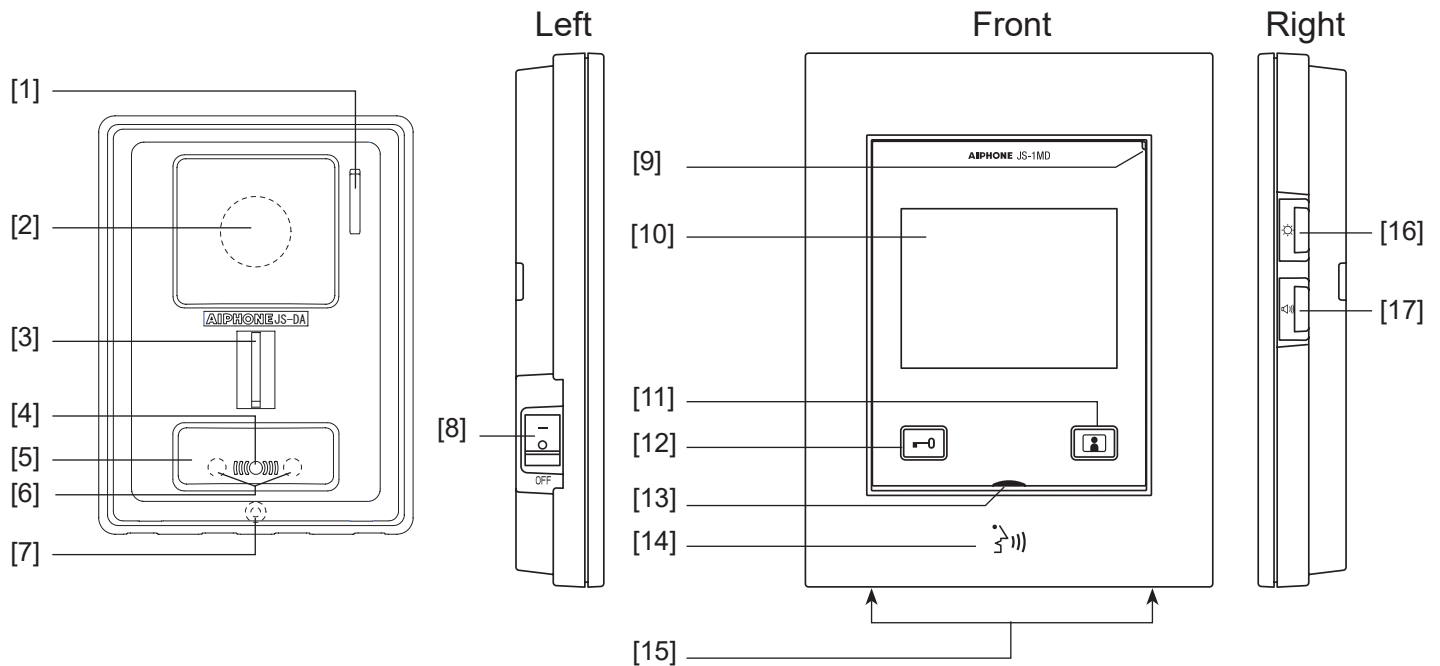

### FEATURE CALL-OUT DEFINITIONS

#### JS-DA

- [1] Microphone
- [2] Camera
- [3] Speaker
- [4] Location LED (red)
- [5] Call button
- [6] White light LED
- [7] Mounting Screw (under panel)

#### JS-1MD

- [8] Power switch
- [9] Microphone
- [10] 3.5" color LCD screen
- [11] Monitor button
- [12] Door release button
- [13] Audio transmit LED (orange)
- [14] Talk/Off button
- [15] Speaker
- [16] Screen brightness control button
- [17] Volume control button

### SPECIFICATIONS

Power Source:	24V DC (PS-2420UL supplied)
Consumption:	225mA (Max)
Screen:	3.5" TFT color LCD
Camera:	1/5" Color CMOS
Door release contact:	24V AC/DC 1 Amp
Communication:	
JS-1MD	Open-voice hands-free auto-voice actuation or PTT
JS-DA	Open-voice hands-free
Operating Temp:	
JS-1MD	32° ~ 104°F (0° ~ 40°C)
JS-DA	14° ~ 140°F (-10° ~ 60°C)
Dimensions:	
JS-1MD	6-5/8" H x 5-1/16" W x 1-1/8" D
JS-DA	5-1/16" H x 3-3/16" W x 1-3/8" D