

Solution 6000 Product Matrix

Showing Products Scheduled For Release In 2018 - Firmware Release V2.28



BOSCH

Invented for life

Any one of the IP modules shown on the right can be installed. IP via Wi-Fi is available when the Wi-Fi keypad is used.

P/N - CM744B
Plug On 3G GSM/
GPRS Module



F.01U.271.876

P/N - CM366B
IP Communications Module
3G GSM/GPRS/SMS/Ethernet




F.01U.287.311

P/N - CM751B
Plug On Ethernet
IP Module



F.01U.271.877

P/N - CM101B
Interactive Voice
Control Module



F.01U.271.505

P/N - SW500B
Upload/Download
Software (V2.11 or higher)
F.01U.271.750




NOW ON USB STICK




P/N - SW501B
Site Manager
Onsite Administration Software
(IP Ethernet Connectivity Required)
F.01U.294.862

P/N - CM710B
4 Way LAN Relay
Output Expander
Module



F.01U.271.516 x8

P/N - CM720B
1AMP LAN Power
Supply & Battery
Charger Module



F.01U.271.517 x8

P/N - CP155B
External Keypad with
Smart Card Reader
F.01U.344.559




P/N - CP151B
Slim Style
External Keypad



F.01U.271.870

Graphic Keypad
P/N - CP700B White
F.01U.275.889
P/N - CP710B Black
F.01U.275.891

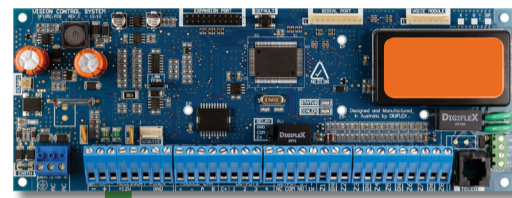

P/N - CC610PB
Solution 6000 Security
Controller PCB
F.01U.294.849

x1



x1

Panel supports direct
RX connection or via
CM195.



1 x RF3212E Receiver-
Directly Connected
4.998.800.010

P/N - CM195
Multi RF Receiver
Interface
F.01U.271.513

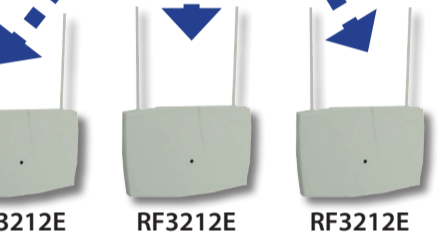

RF3212E

RF3212E

RF3212E

SMART DEVICE APPS



SMS Control



SMS Reports



iFob Control

Smart device apps are available to enhance alarm reporting and provide real time control of system areas, outputs and doors etc. More information can be found in the app stores or on the MyAlarm web site at www.myalarm.com.au.



SMART CARD CREDENTIALS AND LAN READERS

P/N - PR365
Adhesive Smart Card Sticker
F.01U.294.869




P/N - PR301
Smart Card Token with Keyring
F.01U.294.867



P/N - PR370
Dual Smart Card and
EM Format Token
F.01U.316.496



P/N - PR350
ISO Smart Card
F.01U.294.868



External
Smart Card Reader
P/N - PR116B White
F.01U.294.866
P/N - PR115B Black
F.01U.294.865



Internal
Smart Card Reader
P/N - PR114B White
F.01U.294.864
P/N - PR113B Black
F.01U.294.863



Fingerprint Reader
P/N - CM729B White
F.01U.275.882
P/N - CM728B Black
F.01U.275.883



P/N - CP150B
External Keypad
F.01U.271.869



Graphic Keypad with
Internal Smart Card Reader
P/N - CP722B White
F.01U.294.854
P/N - CP732B Black
F.01U.294.856



Graphic Keypad With Wi-Fi
P/N - CP741B White + Tamper
F.01U.294.859



Up to 16 keypad devices of any type can be installed on the Solution 6000 panel. This includes Keypads, Readers and Weigand to LAN Interfaces.



Solution 6000 Product Matrix

Showing Products Scheduled For Release In 2018 - Firmware Release V2.28




BOSCH

Invented for life




P/N - CP799B
Service Keypad
Installer Tool
F.01U.276.909



P/N - CM797B
LAN Isolator Module
F.01U.275.885


Up to 8 LAN Isolator modules can be connected. Isolators provide electrical isolation between LAN segments reducing the chance of surge damage. Isolators can also be used to increase the total LAN length beyond 1200m.



P/N - CM704B
8/16 LAN Zone Expander
F.01U.271.515



P/N - CM707B
8 Zone Piggy
Back Expander
F.01U.275.888

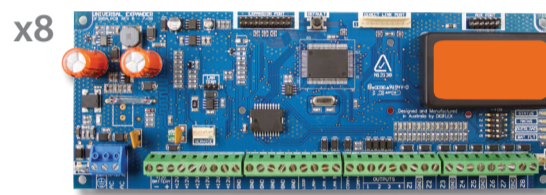


P/N - CM705PB
8/16 Universal LAN Zone
Expander PWA Only
F.01U.275.880

Up to 8 zone expanders of any type can be connected to the system. When using Single or Alarm & Tamper EOL, the CM707B can be installed to provide 16 zones on the CM705B Expander. The CM707B cannot be installed when using split EOL monitoring.


Max panel zone count configuration is:
Single EOL = 136
Alarm & Tamper = 136
Split EOL = 144



P/N - CM430B
LAN to Ethernet
Converter Module
F.01U.????.???



P/N - CM760B
Real Time Clock Module
F.01U.275.884




P/N - CM796B
Wiegand to DF RS485
LAN Interface Module
F.01U.287.314

- = Encrypted RS485 LAN
- = ISOLATED Encrypted RS485 LAN
- = Programmable Serial Input


The CM723B and CM724B can be easily installed inside the CM350, MW720B and MW730B enclosures.



Wiegand to LAN Interface can support 3rd party readers up to 40 bits.

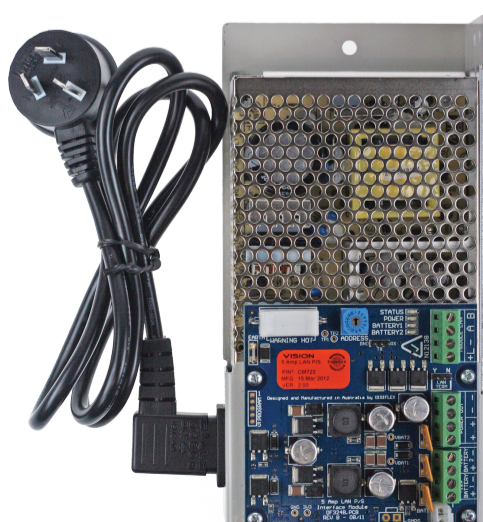


P/N - CM723B
LAN 5 Amp P/S Module
With Dual Battery Chargers
F.01U.275.894

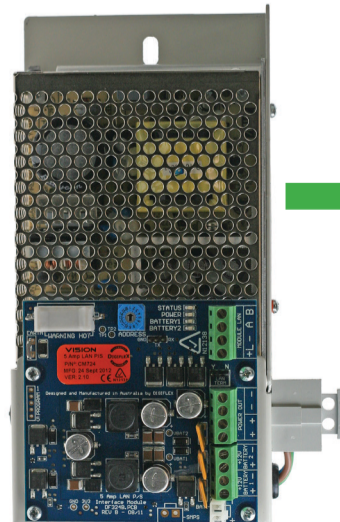

P/N - CM724B
LAN 5 Amp P/S Module With Dual
Battery Chargers (Export Model)
F.01U.276.910




P/N - CM910B
Combined Direct Link \Flash
Programmer Interface - USB
F.01U.316.497



P/N - CM435B
Power Terminal
Expander Module
F.01U.275.898



P/N - CM444B
Slim Style Relay
Card Form C-2 Amp
F.01U.276.914



P/N - CM940B
6 Way Programmable Relay Card.
Can be separated into single relay cards.
F.01U.275.899



P/N - CM255B
Panel Default Unlock Key
Will reset Installer PIN and
RAS PIN on Solution 6000
panels. F.01U.271.514



P/N - CM436B - F.01U.271.892
Desktop Reader Interface For 3rd
party Weigand Readers.
No Reader supplied.

P/N - CM438B - F.01U.321.681
USB powered Desktop Reader Inter-
face for DF format EM Prox tokens.

P/N - CM439B - F.01U.321.682
USB powered Desktop Reader
Interface for DF MiFare Smart Card
tokens.

Desktop readers are for use with Solutionlink and Site Manager Software packages and allow user credentials to be learnt at the PC.

Panels, modules and keypads with Orange product labels or serial number labels are running Digiflex's proprietary RS485 LAN system. They are not compatible with older modules carrying white product labels with the exception of the CM195 which is not a LAN module.

Some features may require panel and or module firmware updates.

