

IP Mini Dome cameras - 4 Mpx and 5 Mpx Fisheye



VIEW
IoT smart life

With
MIC



VIEW
IoT smart life


View
360°

Models	46223.028D(036D)	▲46234.010E**
Sensor	1/3" CMOS progressive scan, 4 Mpx	1/2,9" CMOS progressive scan, 5 Mpx
Resolution	2592 x 1520	3096x2202 (2160x2160 landscape)
Sensitivity	0.05 lux@F1.2, AGC ON; 0 Lux (IR led ON)	0.024 lux@F1.2, AGC ON; 0 Lux (IR led ON)
Video compression	H.264 - H.265	H.264 - H.265
Day & night	ICR	ICR
Lens	2,8/3,6 mm @ F1.6 view angle: 76°	1,07 mm @ F2.5 view angle: 180° (wall) 360° (ceiling)
Main frame rate	30 Fps (2592 x 1520) 30 Fps (2560 x 1440) 30 Fps (2304 x 1296) 30 Fps (1920 x 1080) 30 Fps (1280 x 720)	1) Fisheye + landscape + 3 PTZ 30 Fps (2160 x 2160/1920 x 1920/1440 x 1440) 30 Fps (1920 x 1080) 30 Fps (960 x 540) x 3 2) Fisheye + 4 PTZ 30 Fps (2160 x 2160/1920 x 1920/1440 x 1440) 30 Fps (960 x 540) x 4
Secondary frame rate	30 Fps (1280x 720) 30 Fps (D1) 30 Fps (CIF) 30 Fps (480 x 240)	30 Fps (960 x 960) 30 Fps (960 x 540) 30 Fps (704 x 576) 30 Fps (480 x 480) 30 Fps (480 x 240)
Bit Rate	128 kbps / 9 Mbps	128 kbps / 10 Mbps
SD card	Yes (not included) (128 GB max)	Yes (not included) (128 GB max)
Audio in/out	1/0 (MIC built-in)	1/1 (MIC built-in)
In/out alarm	0/0	1/1
CVBS output video	YES	YES
Function	Real WDR, Smart IR, ROI, 3DNR, Mask, Motion, HLC, BLC, Defog	WDR, ROI, 3D-DNR, Mask, Motion, HLC, BLC
Compatibility	ONVIF	ONVIF
IR	10 m	20-30 m
Protection rating IP/IK	IP66 / IK10	IP54
Operating temperature	-10° C / +50° C	-10° C / +50° C
Power supply / consumption	12 Vdc / PoE - 240 mA 3 W	12 Vdc / PoE - 880 mA 10,6 W
Dimensions (mm)	ø 110 x 58	ø 130 x 39
Weight (g)	349	432
Notes	RTSP*, multi-stream	RTSP*, multi-stream. Installable with 46922.019 bracket with contact box



* RTSP: function for connecting directly to the By-me home automation system without using NVR or as additional cam for IP video entry system.

** The Fisheye 46234.010E cam is suitable for NVR: 46241.F32H, 46241.H32P, 46214.H64.


Shooting range

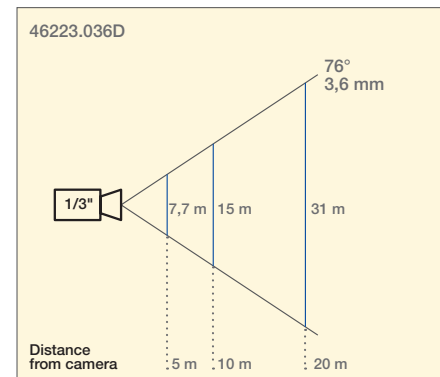

Dimensions in mm

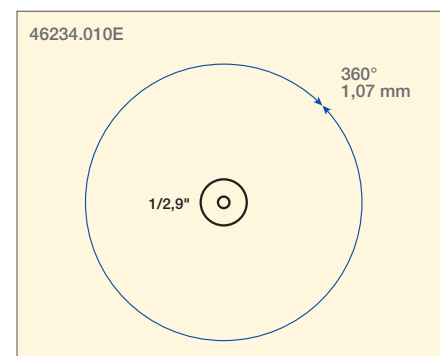

Dimensions in mm

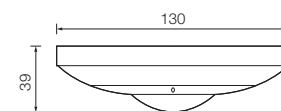

Bracket for IP Fisheye cameras



▲46922.019

Bracket with contact box for IP Fisheye cam for wall and ceiling fixing