



Job _____ Item No. _____

Heated Merchandiser

12NCPW 15NCPW



15NCPW

[with popcorn graphic]



12NCPW

[with nacho graphic]

DESCRIPTION

Star's heated merchandisers are designed to be a visually appealing and functional solution a variety of operations including snack bars, Little League ball parks, recreation stands, and convenience stores. These units are available in two sizes to ensure they can fit any operation's needs—big or small.

SPECIFICATIONS

Star heated merchandisers will be constructed with tempered glass panels and extruded aluminum corner posts. The cabinet will utilize a stainless steel chute for the loading of product and a stainless steel bottom. Units will use a lower heating element to warm product [one 50 watt element for the 12NCPW and one 80 watt element for the 15NCPW]. A 75 watt flood lamp will also be used on each unit to provide additional heat and illuminate the product. Units will have a 6 ft. (1.83 m) long power cord and appropriate NEMA plug for its voltage and amperage.

WARRANTY

These units come with a one [1] year warranty for parts and labor.

FEATURES

- Bright yellow painted steel top and vivid, colorful signs to help build impulse sales
- Panels provides excellent visibility of product no matter where it's placed in the store
- Heated stainless steel bottom keeps product fresh and warm
- A 75 watt flood lamp illuminates the inside of the cabinet to further warm product and enhance product appearance
- A stainless steel chute minimizes breakage when loading product and allows for easy serving

CERTIFICATIONS



STAR MANUFACTURING INTERNATIONAL INC.


265 Hobson St. • Smithville, Tennessee 37166
Telephone 800 264 7827 • Fax 314 781 5445
www.star-mfg.com

Printed in the U.S.A. • 2M-Z22388 • Rev - • 07.2017
Specifications are subject to change without notice
and are not intended for installation purposes.



Heated Merchandiser

□12NCPW □15NCPW

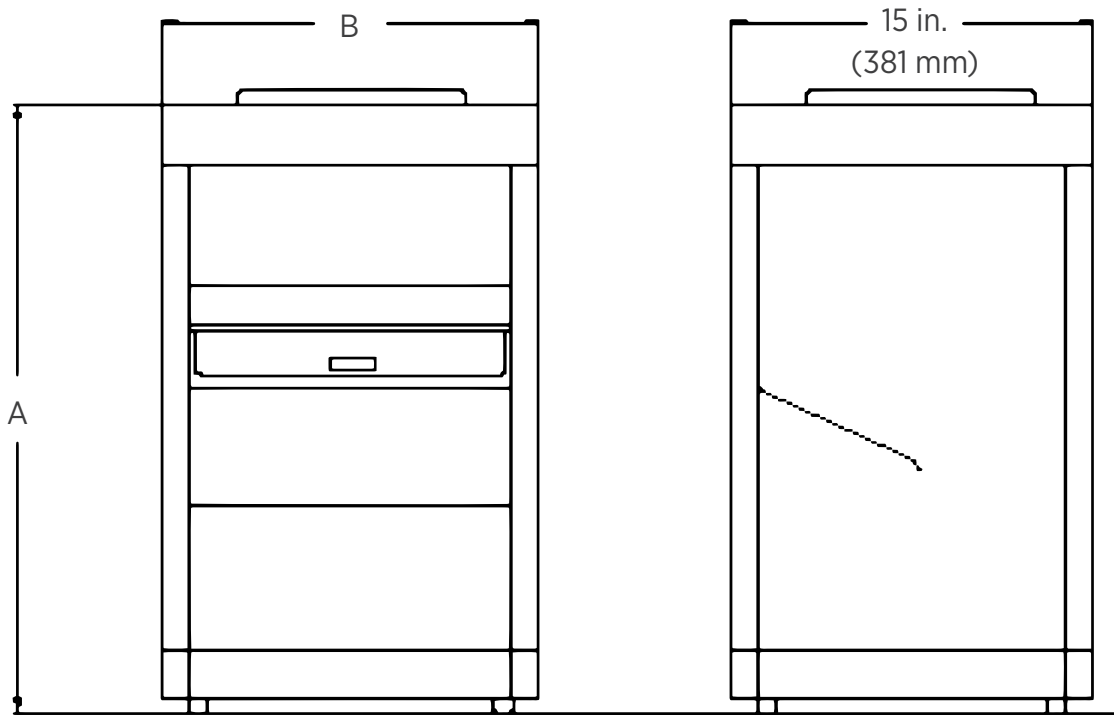

| MODEL | CAPACITY | HEIGHT [A] | WIDTH [B] | DEPTH | WATTS | AMPS | VOLTS | NEMA PLUG | APPROX. SHIP WEIGHT | APPROX. INSTALL WEIGHT |
|--------|--------------------|--------------------|--------------------|--------------------|------------|------------|----------------|-----------------|---------------------|------------------------|
| 12NCPW | 7 lb. (3.2 kg) | 23 in. (584 mm) | 12 in. (305 mm) | 15 in. (381 mm) | 125 121 | 1 0.5 | 120 V 230 V | 5-15P CEE7/7 | 30 lb. (13.6 kg) | 26 lb. (11.8 kg) |
| 15NCPW | 10 lb. (4.5 kg) | 26 in. (660 mm) | 15 in. (381 mm) | 15 in. (381 mm) | 155 158 | 1.3 0.7 | 120 V 230 V | 5-15P CEE7/7 | 35 lb. (15.9 kg) | 31 lb. (14.1 kg) |



5-15P



CEE7/7

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Star Manufacturing exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.



STAR MANUFACTURING INTERNATIONAL INC.

265 Hobson St. • Smithville, Tennessee 37166
 Telephone 800 264 7827 • Fax 314 781 5445
www.star-mfg.com

Printed in the U.S.A. • 2M-Z22388 • Rev - • 07.2017
 Please refer to the owner's manual for information regarding installation or use.