

Model:
D20036

Refrigerated Base (Self- Contained)



Standard Features:

GOLD LINE

Designed with enduring quality that will improve the efficiency and production of your restaurant. Constructed with stainless steel AISI 304 interior & exterior.

Base self-contained, 32-1/2" deep and 26" high

• **REFRIGERANT GAS**

Environmentally friendly R452a - CFC-free

• **BASE**

Self-contained, 32-1/2" deep and 26" high

• **LEGS**

Adjustable stainless steel legs (available also castors as optional)

• **POWER CORD**

Cord and plug included

• **DRAWER**

Heavy-duty drawers S/S - hold standard size GN1/1 (pans not included) - slide on stainless steel rollers.

• **TEMPERATURE CONTROLLER**

Electronic digital controller (temperature range 1°+8°C/34°46°F - not intended to store frozen food)

• **INSULATION**


Ciclopentane High density foamed in place environmentally friendly.

Kyoto Protocol Compliant:

ODP = 0 (Ozone Depletion Potential)

GWP = 5 (Global Warming Potential)

polyurethane keeps energy costs low.

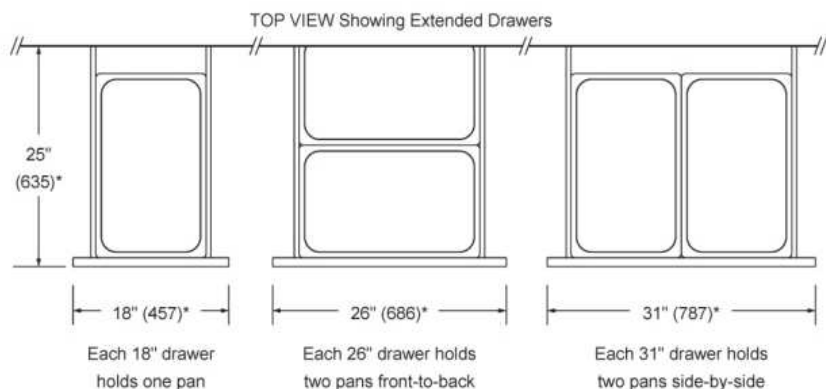

Magnetic removable gasket without tools



Internal bottom made in S/S with stamped rounded corners to facilitate the cleaning procedures.



Digital controller

*Specification may change without prior notice

Model	Drawer	Ambient temp. °C/°F	Cabinet / Packing Dimensions			Voltage	Amp	Shipping Weight
D20036	2 x 18"	32° / 89,6°	mm / inches			230/50/1	2,2	154kg /340Lbs
Temp. °C / °F	Cooling power W	Absorbed power W	L	D	H	Plug	Pans GN1/1 (not incl.)	Gas
-2° , 8° C 28,4° , 46,4° F	450	600	91,4 (cm) 35 31/32"	82,6 (cm) 32 33/64"	66,0(cm) 35 63/64"	Schuko	2	R452a
			105,5(cm) 41 17/32"	97 (cm) 38 3/16"	75(cm) 29 17/32"			

Project Name:	_____
Location:	_____
Item:	_____ Quantity: _____
Date:	_____

Construction specifications:

Available in 32" , 36" , 48" , 60" , 64" , 72" , 84" , 96" , 108" and 120" widths that can support any of the modular selectional range tops .

Self-closing heavy-duty drawers slide on stainless steel rollers.
Drawers hold standard sized (12" x 20" x 4") pans . (pans not included).

CFC-free refrigeration system has an expansion valve for rapid temperature recovery.

Foamed -in-place CFC-free polyurethane insulation provides highest insulation factor available.

Ciclopentane High density foamed in place environmentally friendly.

Kyoto Protocol Compliant:
ODP = 0 (Ozone Depletion Potential)
GWP = 5 (Global Warming Potential)

Rubber magnetic door gasket provide a positive seal and easy cleaning.

The top, front , sides, back, drawers, and interior cavity are made of stainless steel.

6" adjustable stainless steel legs.
Interior corners are covered for easy cleaning (meets NSF Standard #7).

Condensate evaporator pan is standard (72" , 84" , 96" , 108" , & 120" only).

Adjustable digital thermostat.

Mullion coils are coated to resist corrosion and provide maximum air flow for even cooling.

Architect Corner

