


# USB to 16 Form C Relay Outputs

[sealevel.com/product/450u-oem-usb-to-16-form-c-relay-outputs](https://sealevel.com/product/450u-oem-usb-to-16-form-c-relay-outputs)

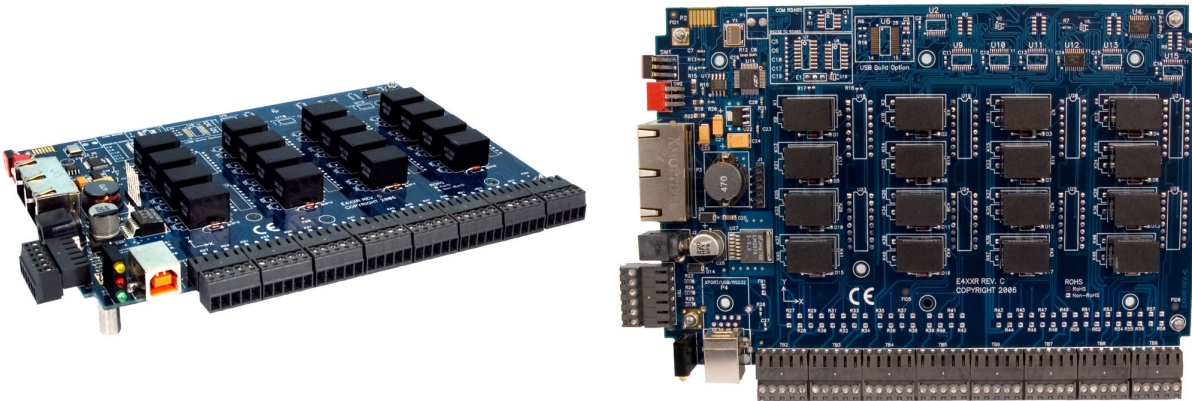

**Part:** 450U-OEM **Model:** Seal/O-450U-OEM

\$252.00

Need some help? [Contact us](#)

## Description

The Seal/O-450U-OEM provides 16 SPDT Form C relays that can be easily controlled from your computer's USB port. Each relay output is rated for switching up to 60VDC @ 2A. The outputs are grouped in four-bit segments that each share a common for easy wiring. The Seal/O-450U-OEM is powered from your 9-30VDC source, or select from a variety of Sealevel power supply options.

Communicate with the Seal/O-450U-OEM using industry-standard Modbus RTU protocol or use the Sealevel [SeaMAX API](#) software libraries from your application program. Sealevel's [SeaMAX](#) software drivers and utilities make installation and operation easy using [Microsoft Windows](#) and [Linux](#) operating systems.

Expand your I/O network with Seal/O N-series products. Seal/O OEM boards are available with Reed and Form C relays, optically isolated inputs, TTL interfaces, A/D and D/A functionality. Up to 246 additional expansion modules can be added using convenient pass-through connectors.

Get a jump start on your digital I/O development with [The Digital I/O Handbook](#) that will provide helpful information that you will use again and again. Check out [Chapter 1](#) for an overview of logic principles.

Categories: [USB](#), [Seal/O-U](#)

## Additional information

---

<b>Family</b>	Seal/O
<b>Contact Bounce Time</b>	7ms max.
<b>Contact Current</b>	2A max.
<b>Contact Operate Time</b>	2ms max.
<b>Contact Release Time</b>	1ms max.
<b>Contact Voltage</b>	60VDC max.
<b>Digital I/O</b>	Form C Relay Outputs
<b>Dimensions</b>	7.5 (L) x 5.0 (W) x 0.8 (H)
<b>Extended Temperature</b>	Call for Options
<b>Humidity Range</b>	10 – 90% Relative Humidity, Non-Condensing
<b>Host Interface(s)</b>	USB
<b>Number of Inputs/Outputs</b>	16 Outputs
<b>OEM</b>	Yes
<b>Operating Temperature</b>	0°C to 70°C (32°F to 158°F)
<b># of Ports</b>	16
<b>Power Requirement</b>	9-30 VDC @ 4.0W

---

---

<b>RoHS Compliant</b>	Yes
<b>Storage Temperature</b>	-50°C to 105°C (-58°F to 221°F)
<b>USB Specification</b>	1.1 Compliant, 2.0 Compatible

---

- 16 SPDT Form C relays
- Removable screw terminals simplify field wiring
- Input power via terminal block or modular connector
- Includes four 3/4 metal standoffs with nuts
- 72 USB A to B cable included
- Sealevel SeaMAX software supports Microsoft Windows and Linux operating systems

Copyright 1996 - 2021 - Sealevel Systems, Inc. All rights reserved.