


USB to 96 Channel TTL Digital Interface

sealevel.com/product/463u-oem-usb-to-96-channel-ttl-digital-interface

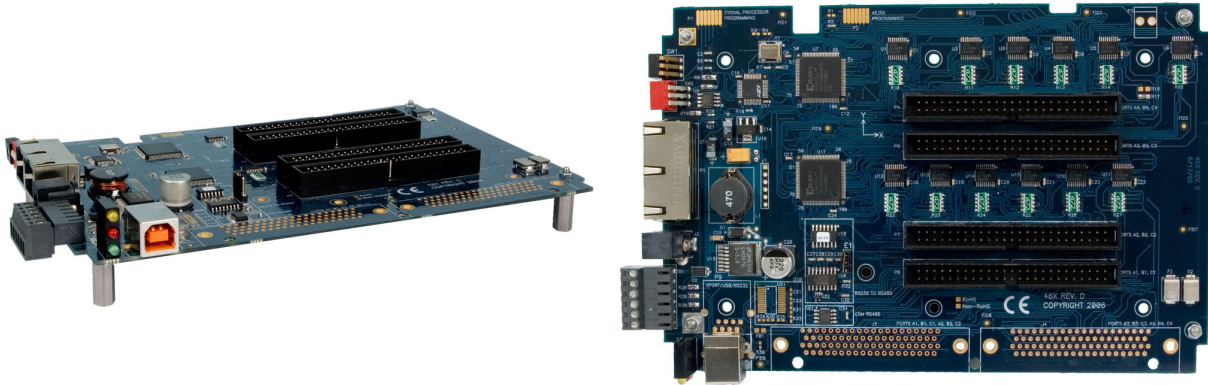

Part: 463U-OEM **Model:** Seal/O-463U-OEM

\$206.00

Need some help? [Contact us](#)

Description

Control and monitor up to 96 channels of buffered drive digital I/O via any USB connection with the Seal/O-463U-OEM. The interface module addresses the 96 channels of I/O as 12 eight-bit ports, each programmable as input or output. Using standard 50-pin IDC ribbon cables, connect up to four industry-standard relay racks for PC based control and automation of equipment including sensors, switches, security control systems, and other industrial automation systems. A metal strain relief bracket is included to secure the cables after installation. The Seal/O-463U-OEM is powered from your 9-30VDC source, or select from a variety of Sealevel power supply options.

Communicate with the Seal/O-463U-OEM using industry-standard Modbus RTU protocol or use the Sealevel [SeaMAX API](#) software libraries from your application program. Sealevel's [SeaMAX](#) software drivers and utilities make installation and operation easy using [Microsoft Windows](#) and [Linux](#) operating systems.

Expand your I/O network with Seal/O N-series products. Seal/O OEM boards are available with Reed and Form C relays, optically isolated inputs, TTL interfaces, A/D and D/A functionality. Up to 246 additional expansion modules can be added using convenient

pass-through connectors.

To simplify ribbon cable installation, a printed copy of the [Ribbon Cable Installation Instructions](#) is included with all Seal/O-463-OEM orders.

Get a jump start on your digital I/O development with [The Digital I/O Handbook](#) that will provide helpful information that you will use again and again. Check out [Chapter 1](#) for an overview of logic principles.

Categories: [USB](#), [Seal/O-U](#)

Additional information

Family	Seal/O
Digital I/O	TTL I/O
Dimensions	7.5 (L) x 5.0 (W) x 0.8 (H)
Extended Temperature	Call for Options
Humidity Range	10 – 90% Relative Humidity, Non-Condensing
Host Interface(s)	USB
Number of Inputs/Outputs	96 TTL
OEM	Yes
Operating Temperature	0°C to 70°C (32°F to 158°F)
Output Power	+5V @ 1A (5W) max.
Output Specification	Sink up to 64mA, Source up to 32mA
# of Ports	96
Power Requirement	9-30 VDC @ 2.0W
RoHS Compliant	Yes

Storage Temperature	-50°C to 105°C (-58°F to 221°F)
USB Specification	1.1 Compliant2.0 Compatible
96 channels of buffered TTL I/O Each 8-bit port individually configurable as input or output Four 50-pin industry-standard solid-state relay rack connectors Status indicator LEDs for Communication, Fault, and Power Input power via terminal block or modular connector Includes four 3/4 metal standoffs with nuts Sealevel <u>SeaMAX software</u> supports Microsoft Windows and Linux operating systems 72-inch USB A to B cable included	

Copyright 1996 - 2021 - Sealevel Systems, Inc. All rights reserved.