


32 Open-Collector Output Seal/O Expansion Module

sealevel.com/product/540n-oem-32-open-collector-output-seal-o-expansion-module

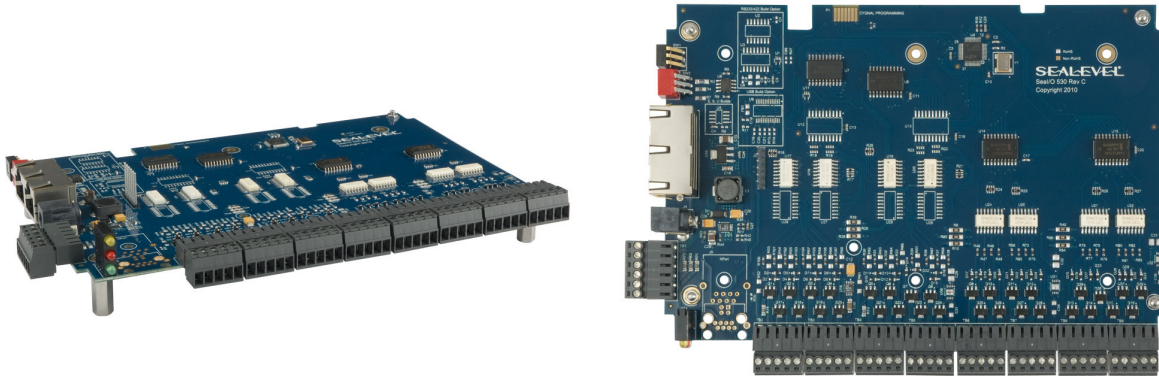

Part: 540N-OEM **Model:** Seal/O-540N-OEM

\$332.00

Need some help? [Contact us](#)

Description

The Seal/O-540N-OEM adds 32 open-collector outputs to your Seal/O network. Compatible with all Seal/O base units (Ethernet, USB, RS-485, RS-232), the Seal/O-540N-OEM connects easily using an RS-485 input. Cabling is accomplished via the units RJ45 connector or removable screw terminals. RS-485 line conditioning allows easy installation of termination and pull-up/pull-down resistors.

All Seal/O N-series expansion modules ship with four metal standoffs with nuts. The metal standoffs allow you to connect multiple Seal/O OEM boards together in a stack. The optional [CA239](#) interconnect cable can be used to connect Seal/O OEM boards together via the RJ45 pass-through connectors, providing an easy method to cascade RS-485 signals and power from one module to the next. Alternatively, use inexpensive CAT5 cabling to pass data signals between Seal/O OEM boards to create a distributed network.

Category: [Expansion](#)

Additional information

| | |
|---------------------------------|--|
| Family | Seal/O |
| Digital I/O | Open-Collector Outputs |
| Dimensions | 7.5 (L) x 5.0 (W) x 0.8 (H) |
| Extended Temperature | Call for Options |
| Humidity Range | 10 – 90% Relative Humidity, Non-Condensing |
| Number of Inputs/Outputs | 32 Outputs |
| Operating Temperature | -25°C to 85°C (-13°F to 185°F) |
| Output Dissipation | Max. 1000mA (single), Max. 2000mA (port) |
| Output Isolation | 2500VAC RMS, 3500VDC |
| Output Power | DC 60W max. |
| Output Type | Open-Collector |
| Output Voltage | Max. 60VDC |
| # of Ports | 32 |
| Power Requirement | 9-30 VDC @ 1.9W |
| RoHS Compliant | Yes |
| Storage Temperature | -50°C to 105°C (-58°F to 221°F) |

Quick connection to Seal/O devices using RJ45 connector or removable screw terminals

32 open collector outputs

Removable screw terminals simplify field wiring

Input power via terminal block or modular connector

Includes four 3/4 inch metal standoffs with nuts

