

GEA STM32MP13









Engicam introduces the new GEA STM32MP13 based on the latest ST® processor equipped with Arm® Cortex®-A7 up to 1 GHz. The module offers very energy-efficient performance and is designed to provide rich performance in high-end wearables, and other low-power embedded and consumer applications.



FEATURES




yocto
PROJECT







	CPU	ST® STM32MP135
	CORES	Arm Cortex-A7 up to 1 GHz
	MEMORY	Up to 1GB LPDDR3L
	GRAPHICS	Two layers (incl. 1 secured) with programmable color LUT
	VIDEO INTERFACES	Two layers (incl. 1 secured) with programmable color LUT
	USB	<ul style="list-style-type: none"> • 1x USB HOST 2.0 • 1x USB OTG 2.0
	AUDIO	<ul style="list-style-type: none"> • SAI interface
	NETWORKING	<ul style="list-style-type: none"> • 2x GB Ethernet interface

HIGHLIGHTS

- Standard EDIMM 2.0
- Low power consumption
- SOM EOL at least 10 Years (based on ST Longevity program)


APPLICATIONS



	MASS STORAGE	<ul style="list-style-type: none"> • 4GB eMMC drive soldered on-board
	PERIPHERAL INTERFACES	UART, I ² C, SPI, CAN, SDIO, GPIOs
	POWER SUPPLY	+5V DC
	OPERATING SYSTEM	<ul style="list-style-type: none"> • Linux • Yocto
	OPERATING TEMPERATURE*	Industrial qualified
	DIMENSIONS	25 x 67.6 mm

* Valid for all components except CPU. Customer shall consider junction temperature for CPU. Temperature will widely depend on application. Specific cooling solutions could be necessary for the final system.

BLOCK DIAGRAM

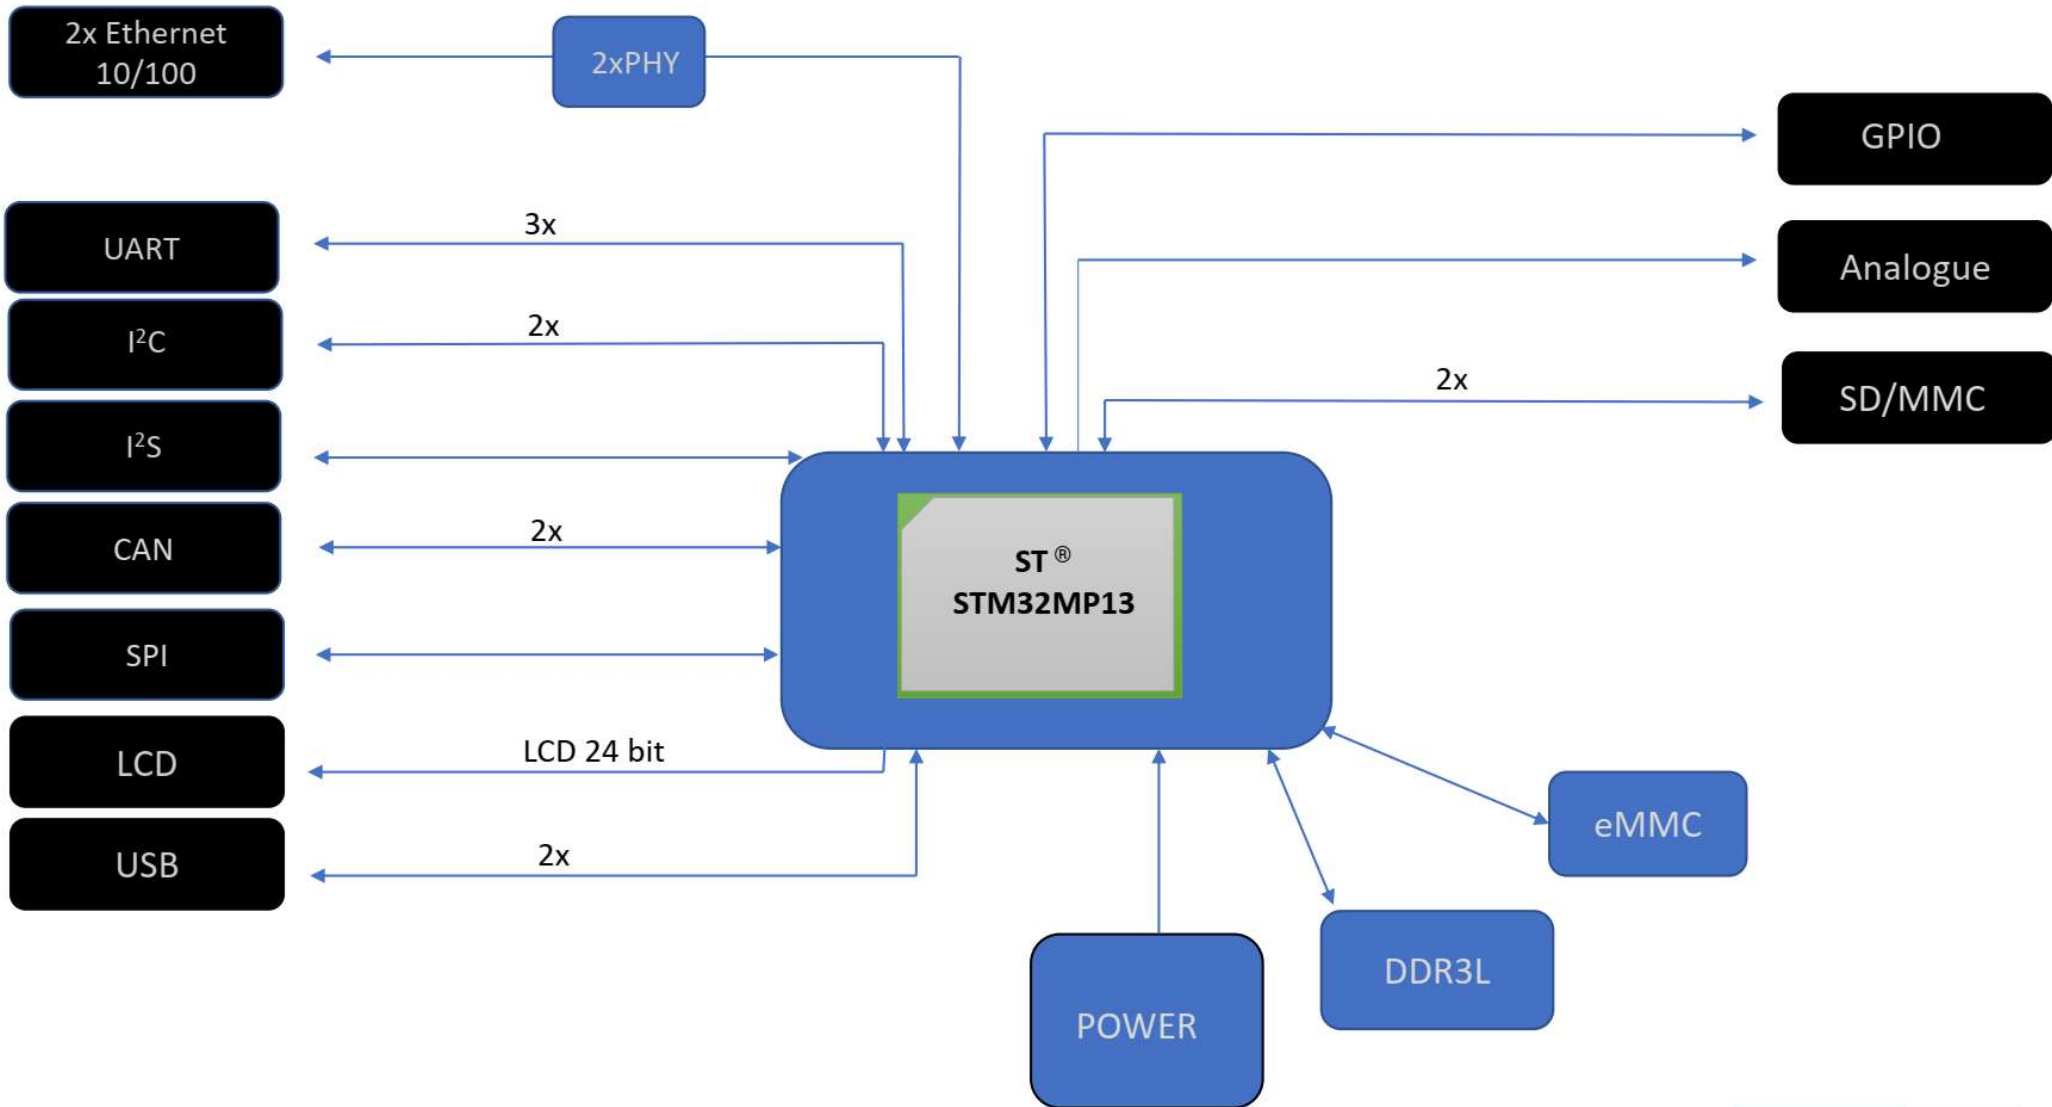

Matlog

4 avenue du Vieil Etang - 78180 Montigny le Bretonneux - France
Tél : +33 01 80 97 92 70 | contact@matlog.com | www.matlog.fr

