



Manage this device with Digi Remote Manager


# DIGI CONNECTCORE 8M MINI

Embedded system-on-module based on the NXP i.MX 8M Mini processor with built-in security; designed for longevity and scalability in industrial IoT applications

Digi ConnectCore® 8M Mini, based on the NXP® i.MX 8M Mini application processor, is a secure integrated system-on-module (SOM) platform. The Mini is designed for a wide range of industrial, medical, agricultural and transportation applications, including Internet of Things (IoT), human-machine interface (HMI), equipment monitoring, audio/voice, graphics/video, edge computing and machine learning.

Digi ConnectCore 8M Mini features four power-efficient Arm® Cortex®-A53 cores, one Cortex-M4 core, and the Digi Microcontroller Assist Cortex-M0, which allow it to minimize power consumption while maintaining a high standard of performance. With a 10+ year product lifecycle, OEMs can reduce their development costs and achieve a lower total cost of ownership by leveraging pre-certified wireless connectivity, remote management, cloud integration, and complete Linux Yocto Project and Android software platform support.

## BLOCK DIAGRAM

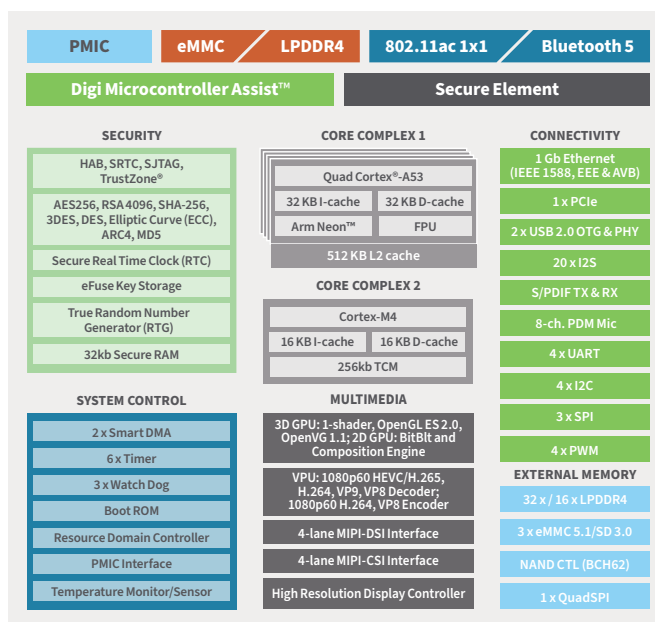

## BENEFITS

- Industrial i.MX 8M Mini quad-core system-on-module
- Digi SMTplus® form factor (40 mm x 45 mm) for ultimate reliability and design freedom
- Power management with both hardware and software support for low-power designs
- Display and camera capabilities with graphics and video hardware acceleration
- Video capabilities with built-in VPU
- Pre-certified dual-band 802.11a/b/g/n/ac 1x1 and Bluetooth® 5 connectivity
- Seamless cellular modem and Digi XBee® wireless integration
- Cloud and edge-compute services integration
- Built-in device security, identity and privacy with Digi TrustFence® and a hardware Secure Element
- Remote monitoring and management with Digi Remote Manager®
- Yocto Project Linux and Android support



## RELATED PRODUCTS



ConnectCore 8M Mini Dev Kit



ConnectCore 8M Nano



ConnectCore 8X



ConnectCore 6UL



Digi XBee Modules

## SPECIFICATIONS

## Digi ConnectCore® 8M Mini

APPLICATION PROCESSOR	NXP® i.MX8 Mini <ul style="list-style-type: none"> <li>• Four Cortex®-A53 cores @ 1.6 GHz</li> <li>• Cortex-M4 400 MHz core processor for low-power processing</li> </ul>	
MEMORY	Up to 8 GB eMMC, up to 2 GB of LPDDR4 (32-bit)	
PMIC	NXP PCA9450	
GRAPHICS / VIDEO	Graphic Processing Unit: <ul style="list-style-type: none"> <li>• GCNanoUltra for 3D acceleration</li> <li>• GC320 for 2D acceleration</li> <li>• LCDIF display controller, supporting up to 1080 p 60 fps display through MIPI DSI</li> <li>• 4-lane MIPI DSI interface</li> <li>• 4-lane MIPI CSI interface</li> </ul>	Video Processing Unit: <ul style="list-style-type: none"> <li>• 1080 p 60 HEVC H.265 (decode)</li> <li>• VP9, H.264, VP8 (encode/decode)</li> </ul>
SECURITY	Digi TrustFence®, TRNG, TrustZone, Secure RTC, Secure JTAG, Secure Element	
PERIPHERALS / INTERFACES	<ul style="list-style-type: none"> <li>• USB 2.0 OTG controllers with integrated PHY interfaces</li> <li>• Three Ultra Secure Digital Host Controller (uSDHC) interfaces</li> <li>• Gigabit Ethernet controller</li> <li>• Four Universal Asynchronous Receiver / Transmitter (UART) modules</li> <li>• Four I2C modules</li> <li>• Three SPI modules</li> <li>• PCI Express 2.0 (PCIe)</li> </ul>	
ETHERNET	10/100/1000M Ethernet + AVB	
WI-FI	802.11a/b/g/n/ac dual-band wireless	
BLUETOOTH	Bluetooth® 5	
ON-MODULE MICROCONTROLLER ASSIST	Digi Microcontroller Assist™ <ul style="list-style-type: none"> <li>• Independent Cortex-M0+ microcontroller subsystem</li> <li>• Supporting ultra-low power modes @ &lt;3µA</li> </ul>	
OPERATING TEMPERATURE	Industrial: -40° C to 85° C (-40° F to 185° F), depending on use case and enclosure/system design	
STORAGE TEMPERATURE	-50° C to 125° C (-58° F to 257° F)	
RELATIVE HUMIDITY	5% to 90% (non-condensing)	
RADIO APPROVALS	US, Canada, EU, Japan, Australia/New Zealand	
EMISSIONS / IMMUNITY / SAFETY	FCC Part 15 Class B, EN 55022 Class B, EN 61000-3-2, EN 61000-3-3, ICES- 003 Class B, VCCI Class II, AS 3548, FCC Part 15 Subpart C Section 15.247, IC (Industry Canada), RSS-210 Issue 5 Section 6.2.2(o), EN 300 328, EN 301 489-17, EN 55024, EN 301 489-3	
DESIGN VERIFICATION	Temperature: IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-78 Vibration/Shock: IEC 60068-2-6, IEC 60068-2-64, IEC 60068-2-27, HALT	
MECHANICAL DIMENSIONS	118 castellated vias, LGA-474, 1.27 mm pitch, fully shielded for radio emissions and thermal management (heat-spreading) 40 mm x 45 mm x 3.5 mm (1.6 in x 1.8 in x 0.1 in)	
PRODUCT WARRANTY	3-year	

PART NUMBERS	DESCRIPTION
DIGI CONNECTCORE® 8M MINI DEVELOPMENT KITS	
CC-WMX8MM-KIT	Digi ConnectCore 8M Mini development kit with development board - quad core, 8 GB eMMC, 2 GB LPDDR4 wireless
DIGI CONNECTCORE 8M MINI SOMS	
CC-WMX-ET8D-NN	Digi ConnectCore 8M Mini - quad core, 8 GB eMMC, 2 GB LPDDR4 wireless
CC-WMX-ET7D-NN	Digi ConnectCore 8M Mini - quad core, 8 GB eMMC, 1 GB LPDDR4 wireless
CC-MX-ET8D-ZN	Digi ConnectCore 8M Mini - quad core, 8 GB eMMC, 2 GB LPDDR4 Ethernet
CC-MX-ET7D-ZN	Digi ConnectCore 8M Mini - quad core, 8 GB eMMC, 1 GB LPDDR4 Ethernet

ACCESSORIES	DESCRIPTION
CC-ACC-LCDH-10	LCD application kit, including 10 in WXGA (high resolution) LCD panel

FOR MORE INFORMATION  
PLEASE VISIT [DIGI.COM](http://DIGI.COM)

The information provided in this document is preliminary and may be subject to change without notice.

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 1996-2021 Digi International Inc. All rights reserved.  
All trademarks are the property of their respective owners.

91004458  
A3/321

DIGI INTERNATIONAL WORLDWIDE HQ  
877-912-3444 / 952-912-3444 / [www.digi.com](http://www.digi.com)

DIGI INTERNATIONAL JAPAN  
+81-3-5428-0261 / [www.digi-intl.co.jp](http://www.digi-intl.co.jp)

DIGI INTERNATIONAL GERMANY  
+49-89-540-428-0

DIGI INTERNATIONAL SINGAPORE  
+65-6213-5380

DIGI INTERNATIONAL CHINA  
+86-21-50492199 / [www.digi.com.cn](http://www.digi.com.cn)

