


TG-A4500

Ultra Soft Thermal Pad


REACH RoHS UL

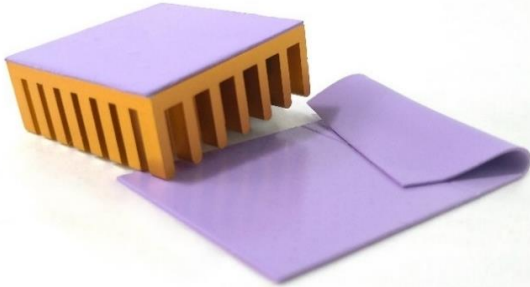


Features

- High thermal conductivity
- High compressibility and compliancy
- Natural tack

Thermal Conductivity : 4.5 W / mK



Hardness : 50 (Shore 00)




Applications

Best for high power applications

Electronic components: IC, CPU, MOS, LED, Mother Board, Power Supply, Heat Sink, LCD-TV, Notebook, PC, Telecom Device, Wireless Hub, DDR II Module, DVD Applications, Hand-set applications etc.

Thermal Resistance VS. Pressure VS. Deflection

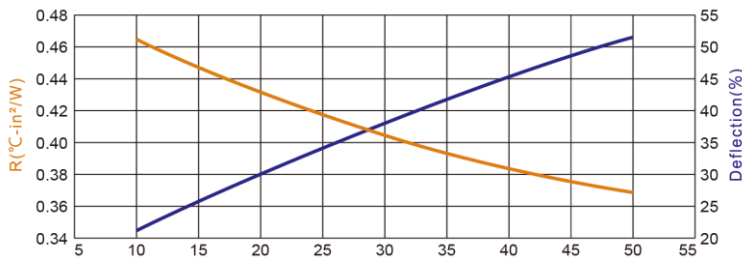

| Pressure (psi) | R (°C-in ² /W) | Deflection (%) |
|----------------|---------------------------|----------------|
| 10 | 0.465 | 21 |
| 30 | 0.405 | 38 |
| 50 | 0.369 | 52 |

Properties

| Properties | TG-A4500 | Unit | Tolerance | Test Method |
|------------------------------|----------------------|---------------------|-----------|-------------|
| Thermal Conductivity | 4.5 | W / mK | ±10% | ASTM D5470 |
| Thickness | 0.5~8.0 | mm | - | ASTM D374 |
| | 0.0197~0.315 | inch | - | ASTM D374 |
| Color | purple | - | - | Visual |
| Flame Rating | V-0 | - | - | UL 94 |
| Dielectric Breakdown Voltage | 6 | KV / mm | ±10% | ASTM D149 |
| Weight Loss | <1 | % | - | ASTM E595 |
| Density | 3.1 | g / cm ³ | ±10% | ASTM D792 |
| Working Temperature | -50 ~ +150 | °C | - | - |
| Volume Resistance | 1 x 10 ¹³ | Ohm-m | - | ASTM D257 |
| Elongation | 50 | % | - | ASTM D412 |
| Standard Shape | Sheet ones | - | - | - |
| Hardness | 50 | Shore 00 | ±15 | ASTM D2240 |

Need samples? **Pre-cut for different shapes**

T-Global Techonology Co., Ltd

Provide professional thermal engineering solutions and full range of products.

No. 33, Ln. 50, Daren Rd., Taoyuan Dist., Taoyuan City 330, Taiwan

T: +886-3-3618899 M: service@tglobal.com.tw W: www.tglobalcorp.com

version16

20190830