


# CMS630-W480E/Q470E

10th Gen Intel® Core™  
Desktop  
ATX

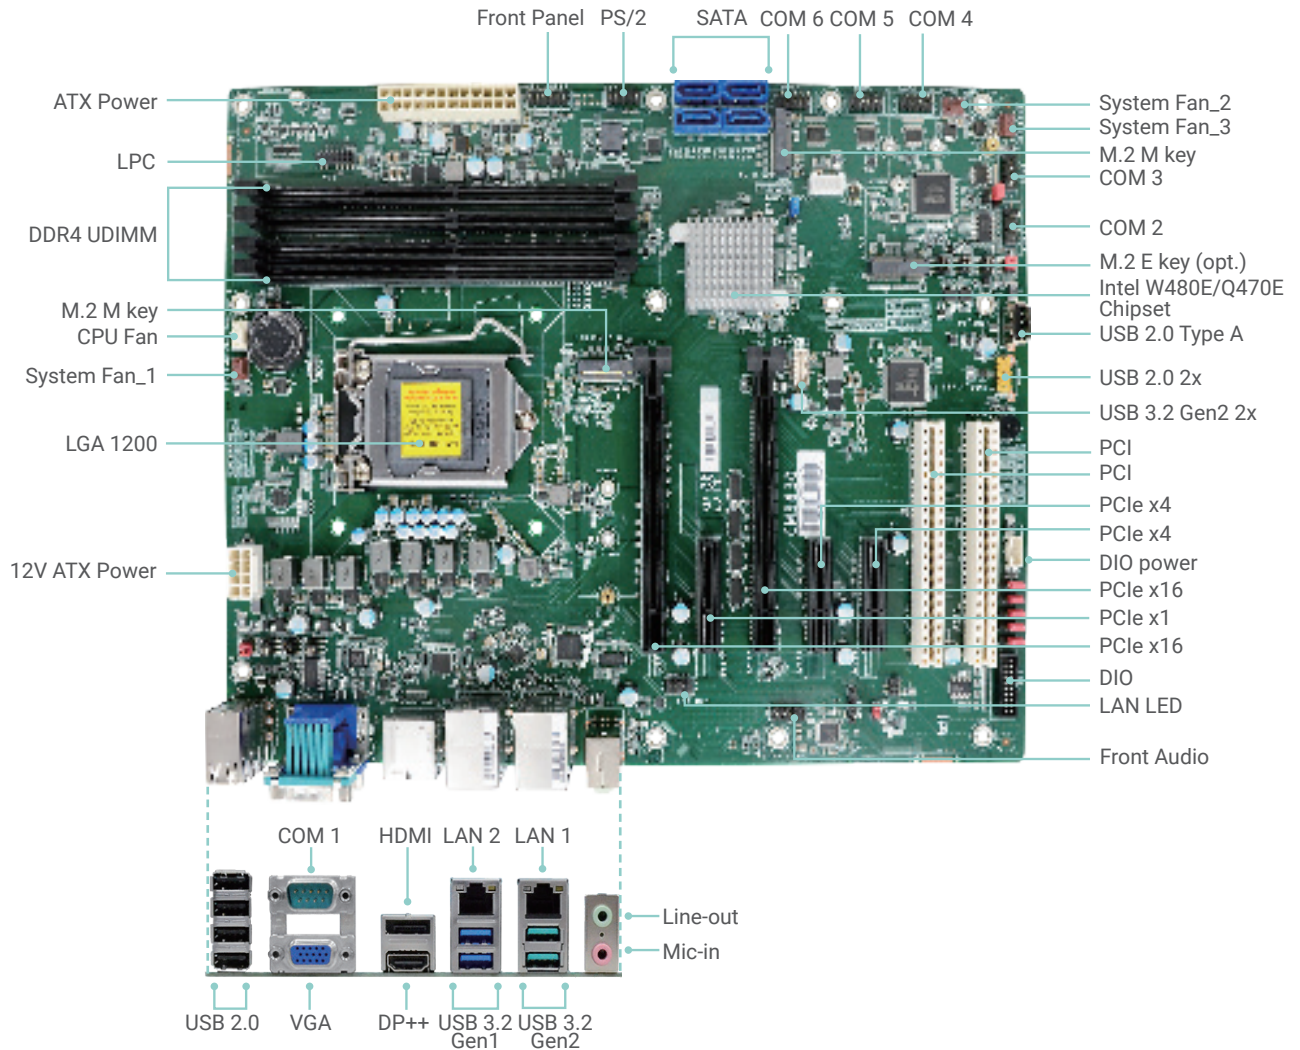

Top View

## KEY FEATURES



### DDR4

4 DDR4 UDIMM up to 128GB



### 4K High Resolution

Supports 4K/ 2K resolution




### Triple Displays

VGA + DP++ + HDMI



### Multiple Expansion


1 PCIe x16(1 x16 signal or 2 x8 signal),  
2 PCIe x4, 1 PCIe x1,  
2 PCI, 2 M.2 M key



### Rich I/O

2 Intel GbE, 4 USB 3.2 Gen2, 2 USB 3.2 Gen1, 6 USB 2.0

## BLOCK DIAGRAM

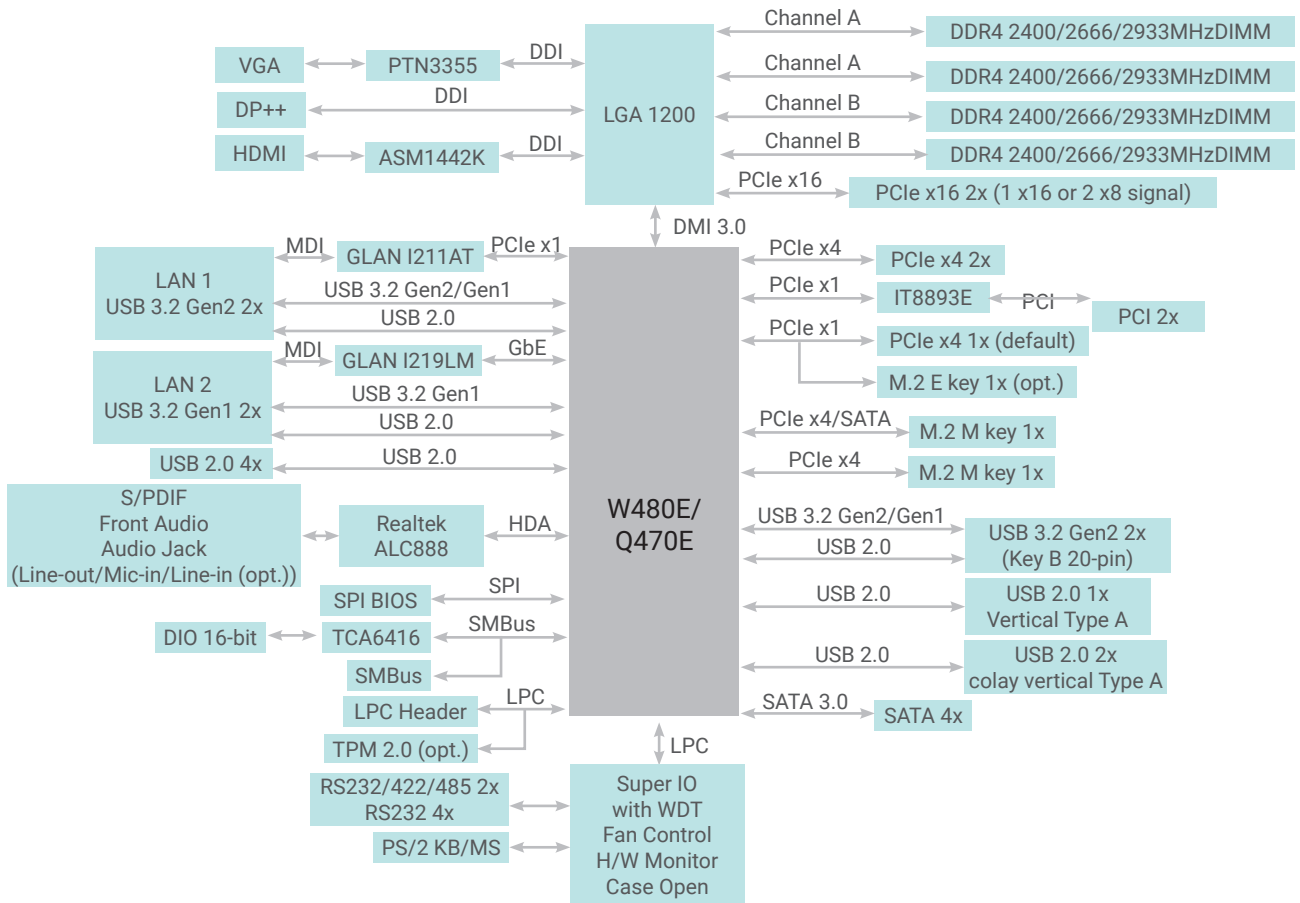

## MECHANICAL DRAWING



## SPECIFICATION

<b>System</b>	<b>Processor</b>	10th Generation Intel® LGA 1200 Socket Processors, TDP support up to 125W Intel® Xeon® W-1290E (10 Cores, 20M Cache, up to 4.8 GHz); 95W (ECC support on W480E SKU only) Intel® Xeon® W-1290TE (10 Cores, 20M Cache, up to 4.5 GHz); 35W (ECC support on W480E SKU only) Intel® Xeon® W-1270E (8 Cores, 16M Cache, up to 4.8 GHz); 80W (ECC support on W480E SKU only) Intel® Xeon® W-1270TE (8 Cores, 16M Cache, up to 4.4 GHz); 35W (ECC support on W480E SKU only) Intel® Xeon® W-1250E (6 Cores, 12M Cache, up to 4.7 GHz); 80W (ECC support on W480E SKU only) Intel® Xeon® W-1250TE (6 Cores, 12M Cache, up to 3.8 GHz); 35W (ECC support on W480E SKU only) Intel® Core™ i9-10900E (10 Cores, 20M Cache, up to 4.7 GHz); 65W Intel® Core™ i9-10900TE (10 Cores, 20M Cache, up to 4.5 GHz); 35W Intel® Core™ i7-10700E (8 Cores, 16M Cache, up to 4.5 GHz); 65W Intel® Core™ i7-10700TE (8 Cores, 16M Cache, up to 4.4 GHz); 35W Intel® Core™ i5-10500E (6 Cores, 12M Cache, up to 4.2 GHz); 65W Intel® Core™ i5-10500TE (6 Cores, 12M Cache, up to 3.7 GHz); 35W Intel® Core™ i3-10100E (4 Cores, 6M Cache, 3.8 GHz); 65W (ECC support on SKU W480E only) Intel® Core™ i3-10100TE (4 Cores, 6M Cache, to 3.6 GHz); 35W (ECC support on SKU W480E only) Intel® Pentium® G6400E (2 Cores, 4M Cache, 3.8 GHz); 58W (Not support on W480E SKU) Intel® Pentium® G6400TE (2 Cores, 4M Cache, 3.2 GHz); 35W (Not support on W480E SKU) Intel® Celeron® G5900E (2 Cores, 2M Cache, 3.2 GHz); 58W (Not support on W480E SKU) Intel® Celeron® G5900TE (2 Cores, 2M Cache, 3.0 GHz); 35W (Not support on W480E SKU)		
	<b>Chipset</b>	Intel® W480E/Q470E Chipset		
	<b>Memory</b>	Four 288-pin Non-ECC UDIMM up to 128GB (Core™ i5/i7 only support non-ECC) Dual Channel DDR4 2400/2666/2933MHz (ECC support: W480E only)		
	<b>BIOS</b>	Insyde SPI 128Mbit		
<b>Graphics</b>	<b>Controller</b>	Intel® HD Gen 9 Graphics		
	<b>Feature</b>	OpenGL 4.5, DirectX 12, OpenCL 2.1 HW Decode: AVC/H.264, MPEG2, VC1/WMV9, JPEG/MJPEG, HEVC/H265, VP8, VP9 HW Encode: MPEG2, AVC/H264, JPEG, HEVC/H265, VP8, VP9		
	<b>Display</b>	1 x VGA 1 x DP++ 1 x HDMI 1.4b	VGA: resolution up to 1920x1200 @ 60Hz DP++: resolution up to 4096x2160 @ 60Hz HDMI: resolution up to 4096x2160 @ 24Hz	
	<b>Triple Displays</b>	VGA + DP++ + HDMI		
<b>Expansion</b>	<b>Interface</b>	1 x PCIe x16 (Gen 3) (1 x16 signal or 2 x8 signal) 3 x PCIe x4 (Gen 3) (2 x4 signal and 1 x1 signal) 2 x PCI 1 x M.2 2242/2260/2280 M key (PCIe Gen3 x4 NVMe/SATA/Intel® Optane Memory and intel RST support) 1 x M.2 2242/2260/2280 M key (PCIe Gen3 x4 NVMe/Intel® Optane Memory and intel RST support) 1 x M.2 2230 E key (USB 2.0/PCIe x1 shared with PCIe x1 slot, opt., MOQ required)		
	<b>Audio Codec</b>	Realtek ALC888		
	<b>Ethernet Controller</b>	1 x Intel® I211AT PCIe (10/100/1000Mbps) 1 x Intel® I219LM PHY with iAMT12.0 (10/100/1000Mbps) (only Xeon, Core i9/ i7/i5 supports iAMT)		
	<b>Ethernet</b>	2 x GbE (RJ-45)		
	<b>Serial</b>	1 x RS-232/422/485 (RS-232 w/ power) (DB-9)		
<b>Rear I/O</b>	<b>USB</b>	2 x USB 3.2 Gen2 2 x USB 3.2 Gen1 4 x USB 2.0		
	<b>Display</b>	1 x VGA 1 x DP++ 1 x HDMI		
	<b>Audio</b>	1 x Line-out, 1 x Mic-in, 1 x Line-in (opt., MOQ required)		
	<b>Serial</b>	1 x RS-232/422/485 (RS-232 w/ power) (2.54mm pitch) 4 x RS-232 (2.54mm pitch)		
	<b>USB</b>	2 x USB 3.2 Gen 2 (Key B 20-pin) 2 x USB 2.0 (2.54mm pitch, Colay vertical Type A, opt.: MOQ required) 1 x USB 2.0 Vertical Type A		
<b>Internal I/O</b>	<b>Audio</b>	1 x Front Audio Header 1 x S/PDIF		
	<b>SATA</b>	4 x SATA 3.0 (up to 6Gb/s, SATA 3)	RAID 0/1/5/10	
	<b>PS/2</b>	1 x PS/2 (mini-DIN-6)		
	<b>LPC</b>	1 x LPC (supports LPC EXT-RS232/RS485 module)		
	<b>DIO</b>	1 x 16-bit DIO		
	<b>SMBus</b>	1 x SMBus		
	<b>Watchdog Timer</b>	<b>Output &amp; Interval</b>	System Reset, Programmable via Software from 1 to 255 Seconds	
	<b>Security</b>	<b>TPM</b>	Infineon TPM2.0 (opt., MOQ required)	
	<b>Power</b>	<b>Type</b>	ATX	
		<b>Connector</b>	8-pin ATX 12V power 24-pin ATX power	
<b>Consumption</b>		TBD		
<b>RTC Battery</b>		CR2032 Coin Cell		
<b>OS Support</b>	<b>Microsoft</b>	Windows 10 IoT Enterprise 64-bit Windows Server 2019		
	<b>Linux</b>	Linux		

<b>Environment</b>	<b>Temperature</b>	Operating: -5 to 65°C Storage: -30 to 60°C with RTC Battery; -40 to 85°C without RTC Battery
	<b>Humidity</b>	Operating: 5 to 95% RH Storage: 5 to 95% RH
	<b>MTBF</b>	TBD
<b>Mechanism</b>	<b>Dimensions</b>	ATX Form Factor 305mm (12") x 244mm (9.6")
	<b>Height</b>	PCB: 1.6mm Top Side: TBD Bottom Side: TBD
	<b>Certifications</b>	CE, FCC Class B

## PACKING LIST

1 CMS630 motherboard	
1 COM port cables (Length: 300mm, 2 x COM ports)	A81-015026-023G
1 Serial ATA data cable (Length: 500mm)	332-553001-005G
1 I/O shield	TBD
1 M.2 screw/standoff	TBD

## OPTIONAL ITEMS

USB 2.0 port cable (Length: 350/398mm)	A81-001066-016G
USB 3.2 Gen2 port cable (Length: 300mm)	A81-001075-017G
COM port cable (Length: 300mm, 2 x COM ports)	A81-015026-023G
Serial ATA data cable (Length: 500mm, W/LOCK)	332-553001-005G
Thermal solution (For 35W, Height: 37.3mm)	A71-101107-000G
Thermal solution (For 65W, Height: 72.8mm)	552-200049-000G
Thermal solution (For 95W, Height: 69.3mm)	761-103001-000G
DP to HDMI Dongle	612-D2H13M-000G
PS2 KB/MS Cable (Length: 400mm)	332-353016-009G
EXT-RS232 (4 ports RS-232 LPC module)	770-EXTRS1-000G
EXT-RS485 (4 ports RS-485 LPC module)	770-EXTRS1-100G
M.2-COM4 (M.2 serial port module)	770-M2COM1-000G
M.2-2LAN (M.2 LAN port module)	770-M22LN2-000G
M.2-2PSE (M.2 PSE module)	770-M22PS1-000G