

| | |
|------------|--|
| Project: | |
| Type: | |
| Catalog #: | |



STANDARD



OPTIONAL

ILLUMINATION

- Adjustable long lasting, efficient ultra bright white LED lamp heads.
- One, 0.5W white LED per lamp head.
- Unique all inclusive lamp, reflector and lens assembly.
- Long-lasting, energy efficient Red or Green LED EXIT sign illumination.

ELECTRICAL

- Dual 120V/277 voltage standard. Optional dual 120V/230V available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable Ni-Cd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- EZ-snap thermoplastic mounting canopy included – provides top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish.


OPTIONS

- SPV: UL Listed for special voltage option.
- HL: Provides increased center-to-center spacing (2.0W per head).
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage.
- RC: Remote capacity of up to 1.0 watts.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- UL Listed for damp locations (0°C – 40°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

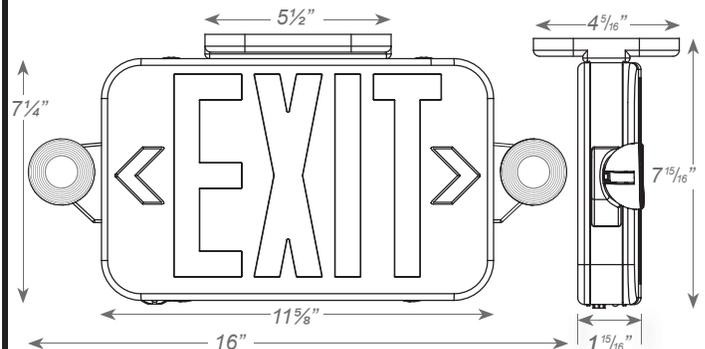

ORDERING INFORMATION

Sample Part Number: CEU3RW

NOTES:

¹ -HL and -RC options cannot be combined. 0.5W of remote capacity available standard with -HL option

| MODEL | No. of FACES | LETTER COLOR | HOUSING COLOR | OPTIONS |
|-------|--------------------------------|------------------|--------------------|---|
| CEU | 3 Universal Single/Double Face | R Red G Green | W White B Black | RC Remote Capacity ¹ HL High Lumen LED ¹ SDT Self-Diagnostics SPV 120/230 Volt 50/60Hz |

| | |
|-------------------|--|
| Project: | |
| Type: | |
| Catalog #: | |

ELECTRICAL INFORMATION

| CATALOG NUMBER | INPUT WATTS (W) | | | INPUT AMPS (A) | | |
|-------------------|-----------------|------|------|----------------|------|------|
| | 120V | 230V | 277V | 120V | 230V | 277V |
| CEU RED | 1.4 | 1.2 | 1.7 | 0.08 | 0.09 | 0.09 |
| CEU RED RC/HL | 1.6 | 1.6 | 1.6 | 0.12 | 0.11 | 0.11 |
| CEU GREEN | 1.1 | 1.2 | 1.3 | 0.08 | 0.09 | 0.09 |
| CEU GREEN RC/HL | 1.6 | 1.6 | 1.6 | 0.12 | 0.11 | 0.11 |
| CEU RED SDT | 2.5 | - | 2.5 | 0.05 | - | 0.05 |
| CEU RED RC-SDT/HL | 3.0 | - | 3.0 | 0.05 | - | 0.05 |
| CEU GRN/RC-SDT/HL | 2.7 | - | 2.7 | 0.05 | - | 0.05 |

REMOTE LAMP COMPATIBILITY

| MODEL NUMBER | BATTERY | REMOTE CAPACITY | COMPATIBLE REMOTE HEAD FAMILY | | | | | | | | | | | | |
|--------------|---------|-----------------|-------------------------------|--------|---------|------|-----|----|-----|-----|-----|-----|-----|--------|--|
| | | | RHLED | MRHLED | RH16LED | RH16 | | RH | | RHR | | SRH | | SRHLED | |
| | | | MV | | | 6V | 12V | 6V | 12V | 6V | 12V | 6V | 12V | | |
| CEU-RC | 3.6V | 1W | x | x | | | | | | | | | | | |
| CEU-HL | 3.6V | 0.5W | | x | | | | | | | | | | | |