

4


Recessed Indirect Panel Light

Inch


- Durable airtight aluminum body with etched white polycarbonate diffuser lens for low glare
- I.C. rated for direct contact with insulation
- No existing recessed housing or junction box required
- Dimming: TRIAC down to 10%
- Suitable for DAMP LOCATION
- Rated for a long life - over 50,000 hours



SPECIFICATIONS		
Model / Ordering Guide	LA4BLR-10W-3CCT-D90-MW	LA4BLS-10W-3CCT-D90-MW
Shape	Round	Square
Default Driver Input	AC120V, 60Hz	AC120V, 60Hz
Size	4 In	
Watts	10W	
Light Output(lm)	600lm	
Color Temperature(K)	3CCT Selectable 3000K to 5000K	
CRI	90Ra+	
Dimming	Triac Dimming	
Power Factor	>0.9	
Approved Location	Damp Location	
Air Tight	Yes	
Operating Temp.	(-4°F~104°F) -20~40°C	
Beam Angle	120°	

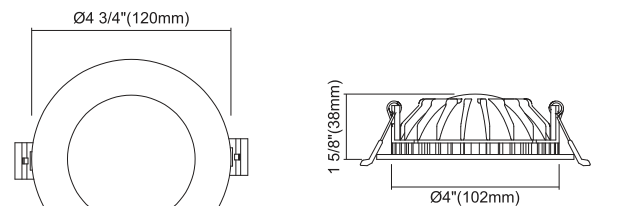

Cut Hole Size: Ø4-1/4"

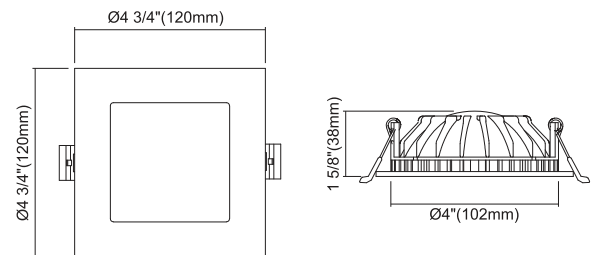

Cut Hole Size: 4-1/4"x4-1/4"

Accessories

<p>Mounting Plate</p>  <p>R2.5-4-6-NC See Page 63</p>	<p>Mounting Plate</p>  <p>R4-NC See Page 63</p>	<p>Mounting Plate</p>  <p>R4-6S-NC See Page 63</p>
--	--	---

