



FUME BOSS 210



The Fume Boss 210 is the industry's most powerful, reliable, and convenient to use portable fume extractor - now with high/low modes for maximum performance. The dual motor design allows the welder to switch on just one motor for typical light duty work, and switch on a second motor for more demanding applications.

The ability to switch between high and low modes empowers the operator choose between a higher capture range and less time spent re-positioning with two motors running and a quieter running, lower capture range with one motor running.

Welding in the field or confined spaces requires a portable fume extractor that people will actually use.

Features:

- Designed for light-medium duty welding
- Attaches quickly to MiG Fume Extraction Guns
- Lightweight, exceptionally portable design
- Nanofiber MERV 15 Filter Cartridge
- Magnetic nozzle base for secure nozzle placement
- Filter service indicator

Benefits:

- Protect your breathing zone by filtering harmful weld fumes with high efficiency nanofiber technology
- Meet and exceed North American safety standards, including OSHA, for weld fume capture-at-source

FUME BOSS

Primary Filter

Comes with:

Nanofiber

MERV 15 efficient cartridge filter captures particles at the submicron level, and surface-loading technology allows dust to be easily dislodged during cleaning with compressed air.




FB-210-0001

EFFICIENCY: MERV 15
FILTER MEDIA: NANOFIBER
MEDIA AREA: 55 SQ.FT.
COATING: FIRE RETARDANT
END CAP: OPEN/CLOSED
CLEANING METHOD: COMPRESSED AIR
MAX TEMP: 180° F / 82° C
FLANGE: NONE

Dimensions

| Model | Filter Type | Cord Length (ft.) | Hose Length (ft.) | Product Dimensions (in.) | | |
|--|-------------|-------------------|-------------------|--------------------------|------------|------------|
| | | | | Width [b] | Height [c] | Length [d] |
| Fume Boss 210 compact welding fume extractor | | | | | | |
| FB-210-010N1 | Nano-Fiber | 6 | 10 | 16.5 | 18.5 | 35.5 |

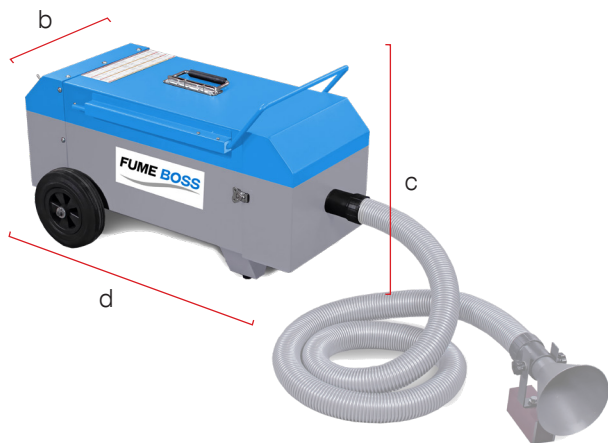

Technical Specifications

| Model | Motor (H.P.) | Airflow (CFM) | Input Power | | | | Net Weight (lbs.) | Noise @5ft (dB) |
|--|--------------|---------------|-------------|---------|------|--------|-------------------|-----------------|
| | | | Phase | (volts) | (hz) | (amps) | | |
| Fume Boss 210 compact welding fume extractor | | | | | | | | |
| FB-210-010N1 | 1.0HP x 2 | 105/210 | 1 | 120 | 60 | 16.0 | 48 | 68/77 |

CONTACT US

984 Farewell St S, Unit #3
 Oshawa, ON L1H 6N6
 Phone: (416) 276-9211
 Email: info@ccmechanical.ca