


Binding New Radio to Receiver

1. Remove the front cover of the radio and locate the bind button. (see figure 1)

Figure 1

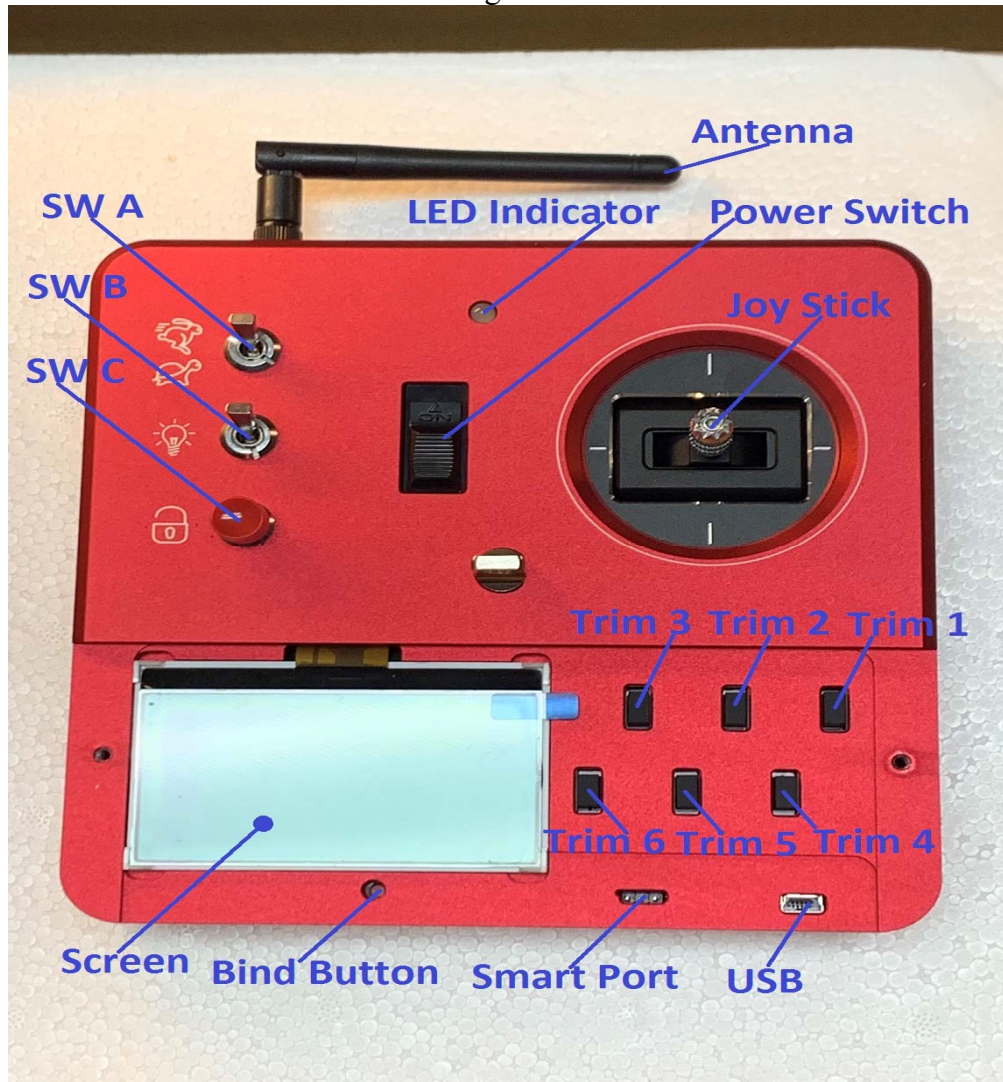

2. Locate the receiver on the tug (it is a small black rectangular box with 3 to 5 wires connected on one end, see figure 2)
3. Locate the bind button on the receiver, it is marked with a F/S next to it. (see figure 2)

Figure 2



4. With the power turned off on the tug press the bind button on the receiver and hold it while you turn on the power switch of the tug.
5. Notice a red light will illuminate next to the bind switch on the receiver.
6. Now turn on the radio
7. Press the bind switch on the radio and watch for the red light on the receiver to start blinking green.
8. Turn off the radio and the tug
9. Turn on the radio and the tug and the light on the receiver will be solid green. This indicates the receiver is communicating with the radio.

You can see a YouTube video of this procedure at the link below.

<https://www.youtube.com/watch?v=ghlyevCAcVQ&t=1s>