


Removing the T1X2 PC Board



1. Remove the battery connection to PC Board (Green Oval)
2. Remove the 4 Phillips Head screws (Yellow Ovals)
3. Disconnect 3 motor wires on each side (Red Ovals)
Note Wire Colors- Yellow to Yellow, Blue to Black, Orange to Red
4. Disconnect the charger plug and the on/off switch plug (Blue Oval)
5. Disconnect lights if they are installed (Blue Oval)
Note that the picture does not have lights plugged into board.
6. Disconnect the servo connection from the receiver (Purple Oval)
Note the wire position on the receiver is number 5 from left side.
7. Pull the board out in an upward direction.

It may be necessary to clip some of the zip ties to be able to remove the board.

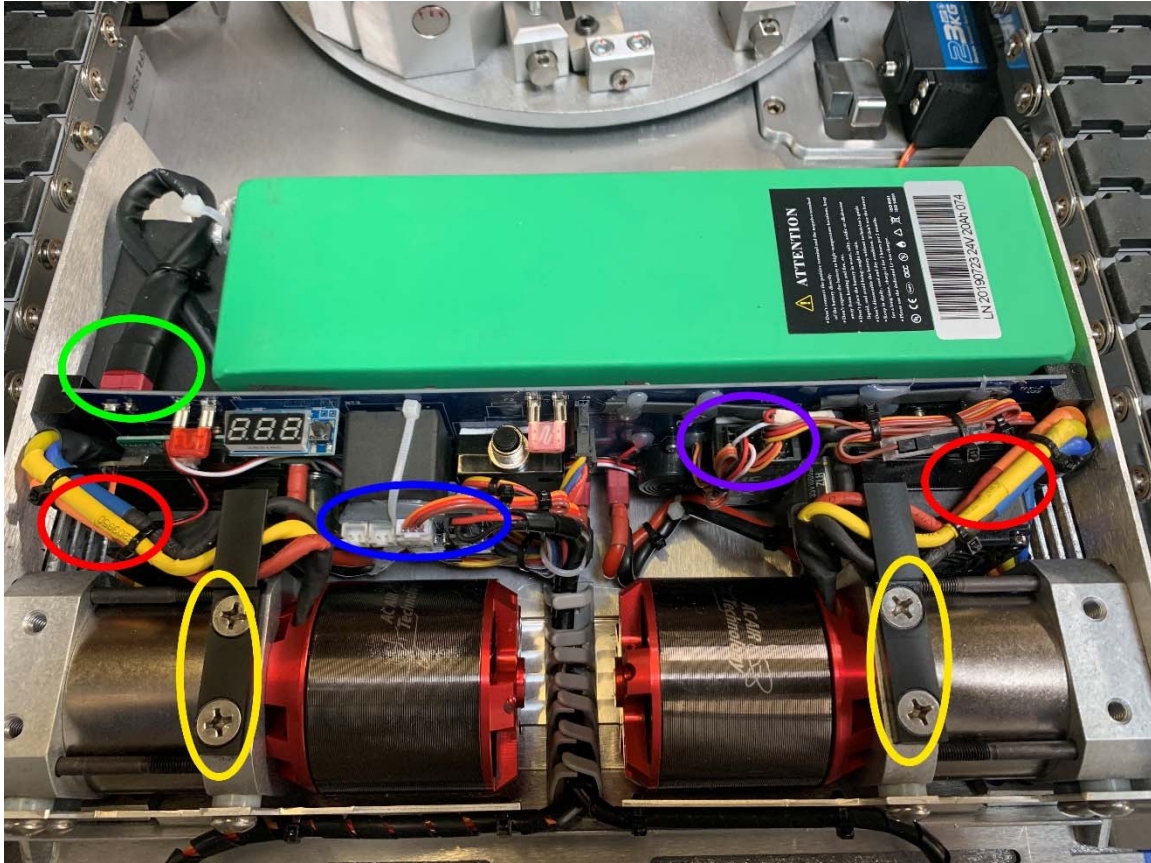