


Light Kit Installation Instructions

Used for the T1X4, T1X3, T1X2, T1V2, T-Mini


Step 1. Install the lights to the cover of the tug as shown below.
(Use removable Loctite on all the screws)

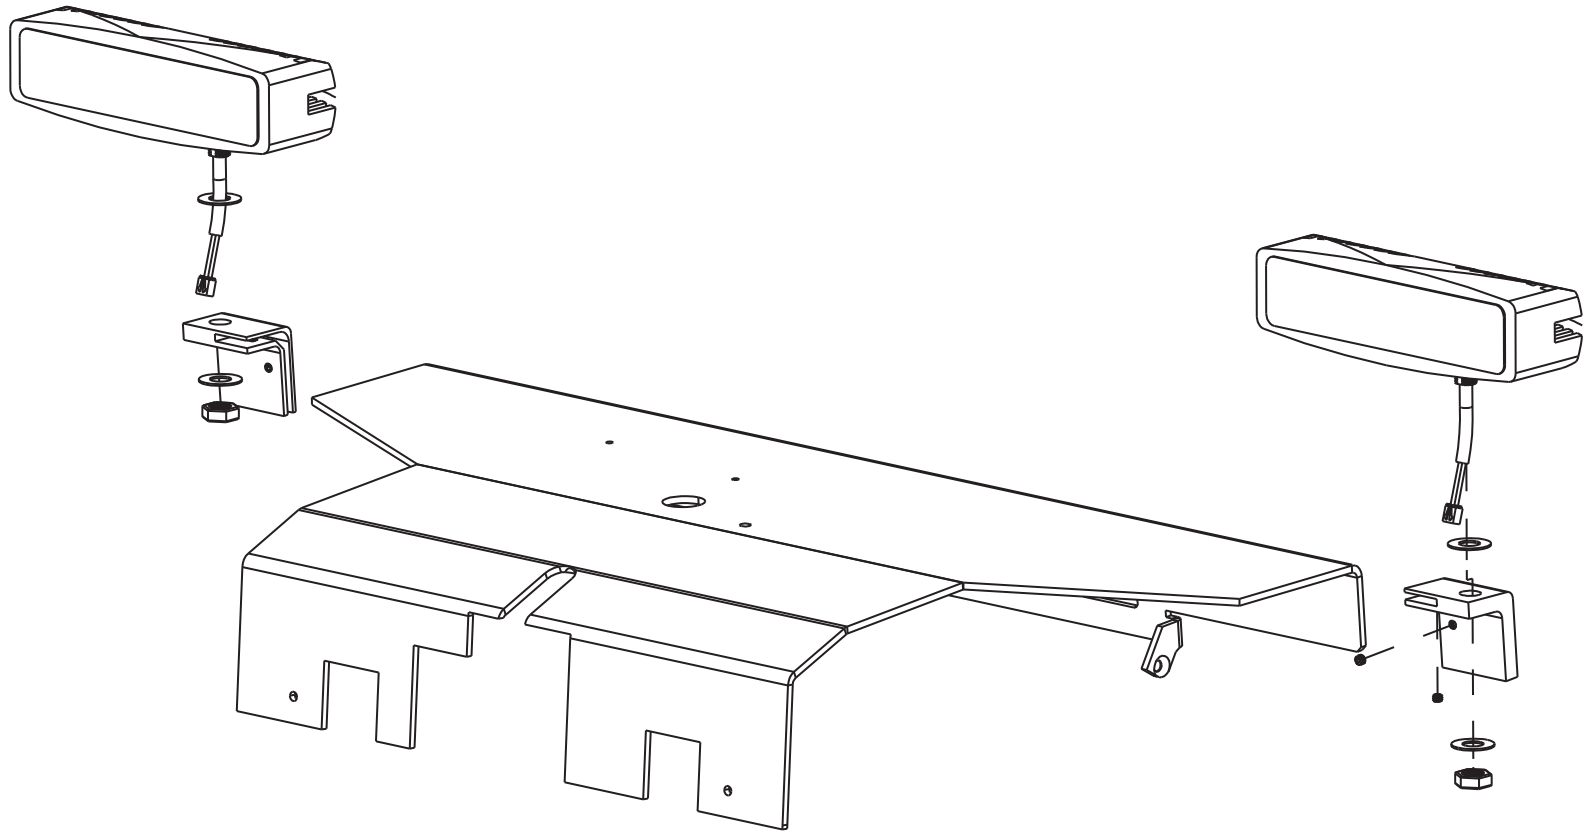


Step 2. Route the light wires as shown if the picture below.
Note: wires need to be tucked up close to clear the tracks.



Step 3. Zip tie the wires as shown below. The green arrows are for new zip ties. The red arrows are existing zip ties that need to be reinstalled.

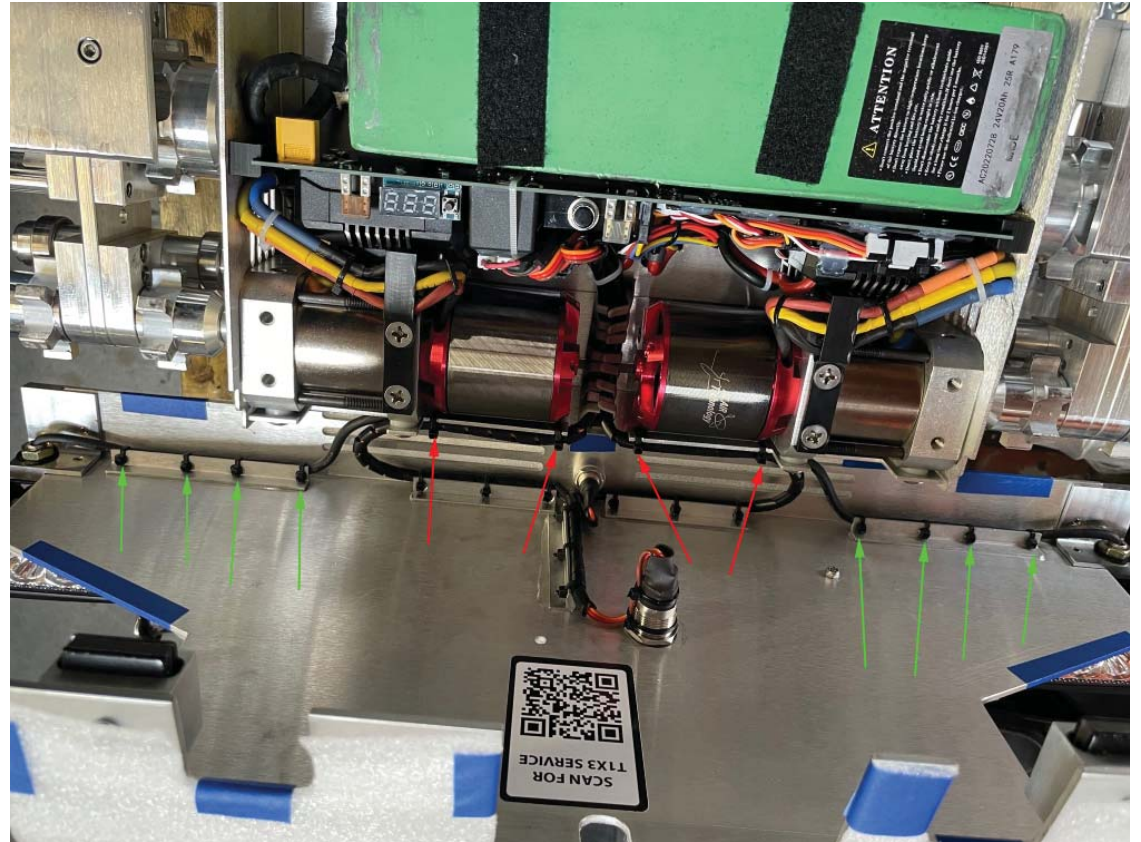


Step 4. Run wires through the wire manager shown below with the red arrow. Connect plugs to PC board shown with green arrow. Note: Green arrow connections are interchangeable for right and left light wires.

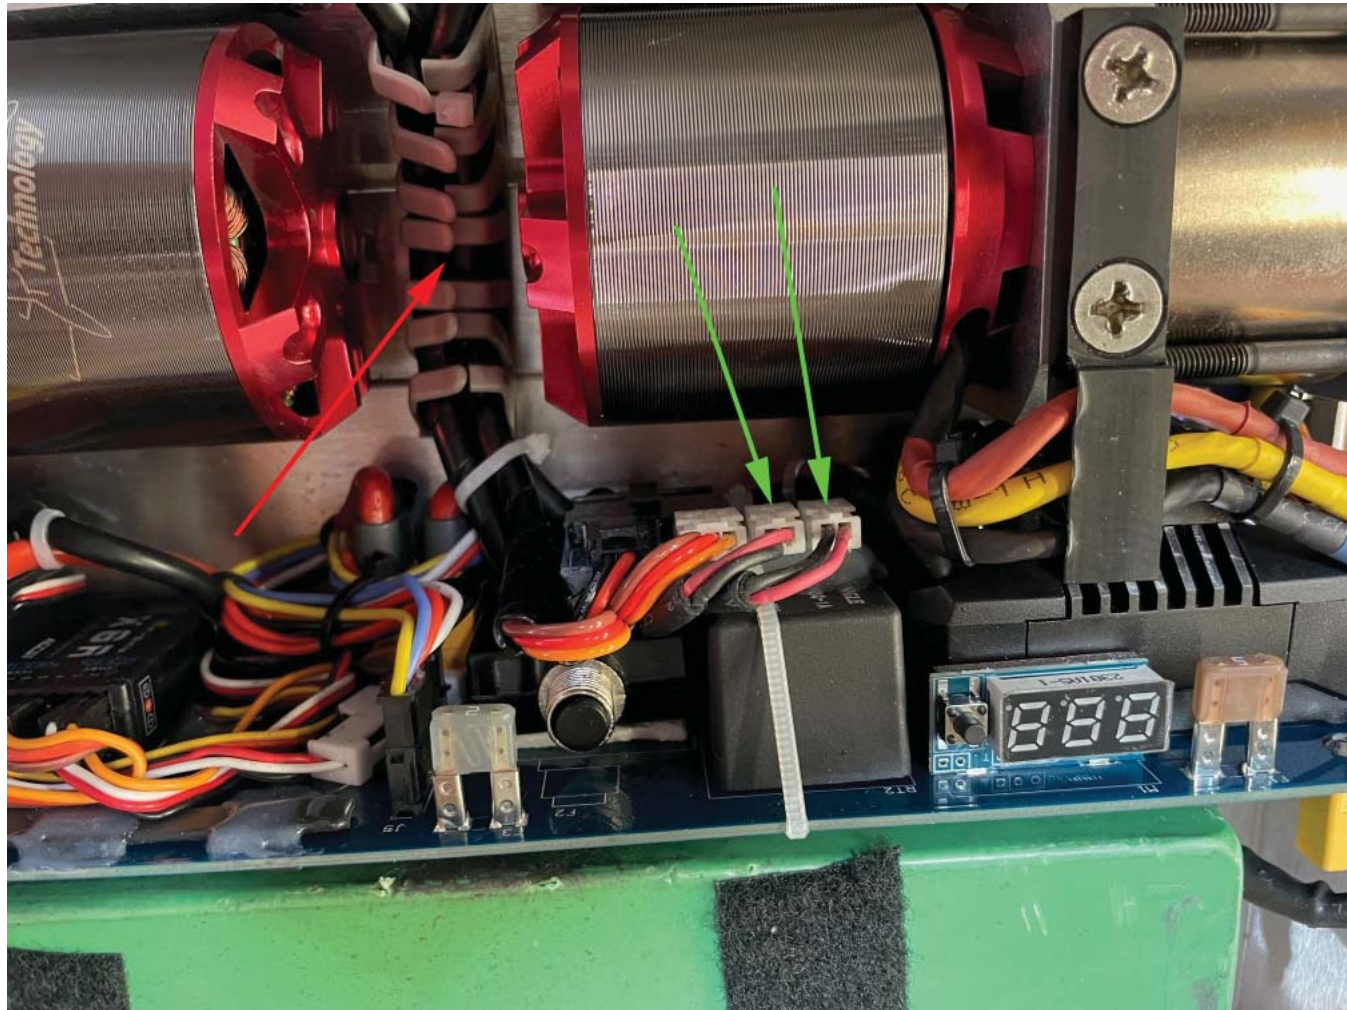

Step 5. Remove the battery cover from the back of the radio and unplug the battery pack. See picture below for location of battery plug.



Step 6. Remove the back cover of the radio (4 screws) and install the light switch in the center position. You will need to remove the rubber plug that is covering the switch hole on the front of the radio. See the picture below for the switch position and wire connections. Note: be very careful with the antenna connection to the circuit board.

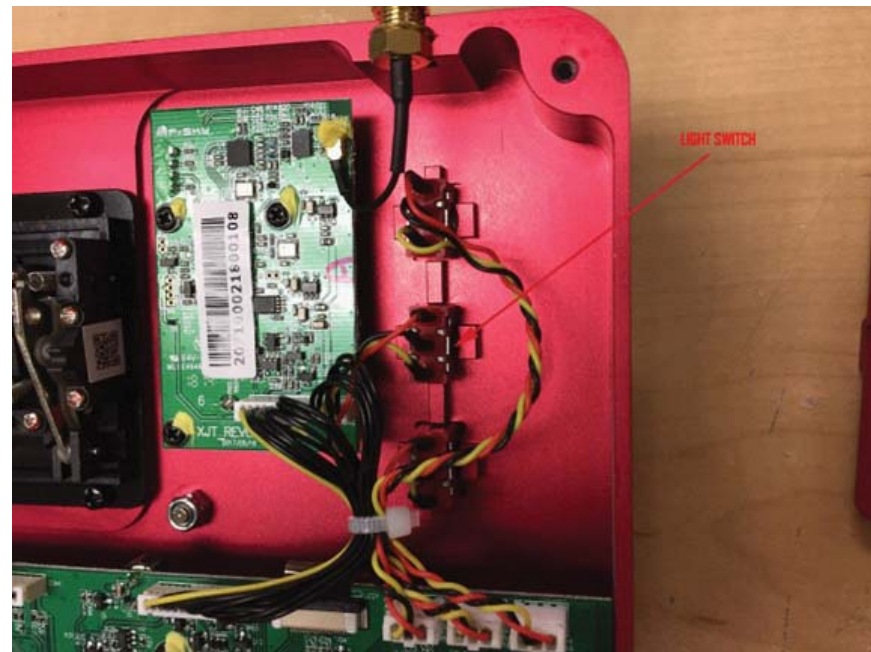

Step 7. Reinstall the back cover of the radio and install the battery pack and battery cover.