


# JBA

## PERFORMANCE EXHAUST

A PerTronix Performance Brand ~ [www.pertronixbrands.com](http://www.pertronixbrands.com) ~ 909 599-5955

### *Installation Instructions & Warranty Information*

30-2648 / 40-2648 2015-21 Mustang Eco Boost  
3" Dual Cat Back

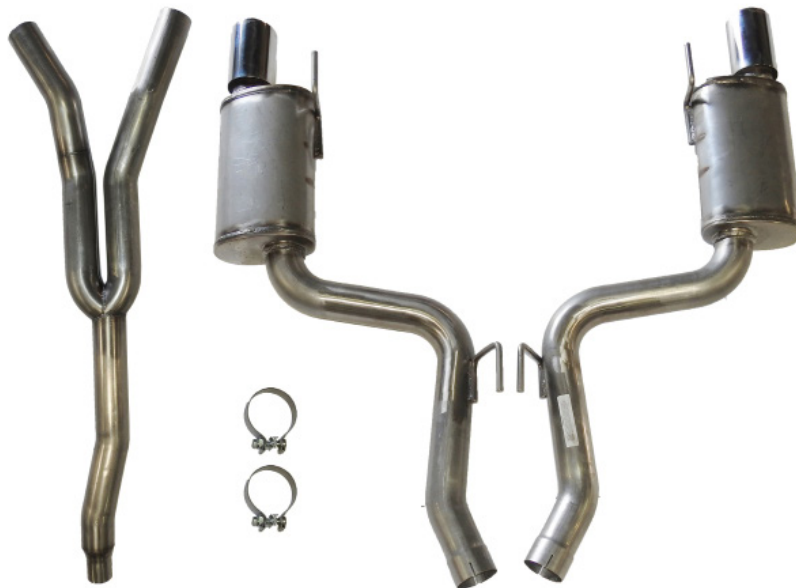

PerTronix© thanks you for choosing JBA exhaust, the best fitting, highest quality exhaust on the market. To realize the full potential of our good fit, please read and understand these instructions completely prior to starting the install.

Be sure to work **SAFE!** Whenever you work under a vehicle be sure it is located on level, solid ground and is supported by high quality jack stands. Remember Hot Asphalt can sink under the weight of most jack stands!


**⚠ WARNING:**

This product can expose you to chemicals including Lead, Nickel, Cadmium and Chromium which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

REV. 2 1-18-21 DSL

## INSTALLATION:

1. Remove and inventory the JBA Exhaust System.
2. Disconnect the negative battery cable and allow the exhaust system to completely cool.
3. Raise car a minimum of 24" off the ground - A lift is the preferred method.
4. The middle section of the exhaust and mufflers are one unit and need to be removed as one. At the front there is a clamp that attaches the mid section to the down pipe. Loosen the clamp, undo the lock tab, and slide them backwards (see picture below). At the mufflers you need to slide the hangers from the rubber mounts (WD40 or other spray lubricant will make it easier)

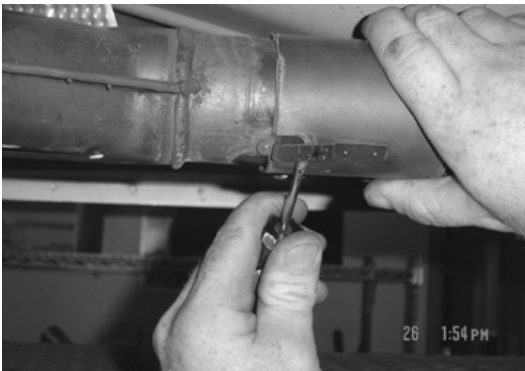

5. Offer the JBA Y-Pipe up to the stock down pipe using the original Ford clamp and support with a tall stand, or friend.
6. Install the JBA mufflers onto the rubber hangers WD 40 will ease installation.
7. Slide the JBA Muffler over the end of the JBA Y-Pipe with the 3" Accu Seal Clamps.
9. With the axle pipes in the muffler assemblies adjust mufflers to be flat with the tips centered in the bumper cover, Then tighten all clamps securely.
10. Using a soft cloth, wipe the new JBA tips clean.
11. Reconnect the battery and start the vehicle to check for leaks.

### NOTES:

- 1.) All exhaust systems expand about 1" rearward when exhaust temperature rises so keep this in mind when adjusting your system.

JBA Also offers a replacement down pipe after the cat for improved flow and more power, while still being CARB and EPA Legal. Ask about Part #1748SD or 31748SD

**Parts List:**

- |   |  |
|---|--|
| 1 | 3"Y-Pipe                                 |
| 2 | 3" Rear Axle Pipes                       |
| 1 | Driver's Side Muffler with Stainless Tip |
| 1 | Pass Side Muffler with Stainless Tip     |
| 2 | 3" Accu Seal Clamps                      |

**4**

This product is considered a Replacement part per CARB and EPA regulations for emissions compliance and is legal for sale and use on all vehicles in all 50 states when installed according to the Manufacturer's Application Guide and Installation Instructions.

**JBA LIMITED WARRANTY**

All JBA Headers and Exhaust products are guaranteed, to the original purchaser, to be free of defects in materials and workmanship for one year. This warranty covers the replacement or repair of the product only and does not cover the cost of removal and installation, customer applied aftermarket coatings or any discoloration or corrosion of finished surfaces.

Damage or product failure resulting from collision, improper installation, off-road use, road hazards, the use of exhaust insulating wrap or like products or rust occurring after installation, is not covered by the warranty. The warranty extends only to the original purchaser.

Should a part become defective it should be returned to the original selling retailer and must be accompanied with the sales receipt. If there is no retailer in your area, call the factory for a return authorization and return your part prepaid to the factory for inspection. PerTronix reserves the rights to replace or repair the alleged defective part and return the part freight collect.